

**MICROSCAN.**

# ***EZ Match Imager User Manual***



---

## *Copyright and Disclaimer*

Copyright ©2015  
Microscan Systems, Inc.

ISO 9001 Certified  
Issued by TÜV USA

All rights reserved. The information contained herein is proprietary and is provided solely for the purpose of allowing customers to operate and/or service Microscan manufactured equipment and is not to be released, reproduced, or used for any other purpose without written permission of Microscan.

Throughout this manual, trademarked names might be used. Rather than place a trademark (™) symbol at every occurrence of a trademarked name, we state herein that we are using the names only in an editorial fashion, and to the benefit of the trademark owner, with no intention of infringement.

### ***Disclaimer***

The information and specifications described in this manual are subject to change without notice.

### ***Latest Manual Version***

For the latest version of this manual, see the Download Center on our web site at:  
[www.microscan.com](http://www.microscan.com).

### ***Technical Support***

For technical support, e-mail: [helpdesk@microscan.com](mailto:helpdesk@microscan.com).

### ***Warranty***

For current warranty information, see: [www.microscan.com/warranty](http://www.microscan.com/warranty).

## **Microscan Systems, Inc.**

### **Renton Headquarters**

Tel: 425.226.5700 / 800.251.7711  
Fax: 425.226.8250

### **Nashua Office**

Tel: 603.598.8400  
Fax: 603.577.5818

### **Microscan Europe**

Tel: 011 31 172 423360  
Fax: 011 31 172 423366

### **Microscan Asia Pacific**

Tel: 65 6846 1214  
Fax: 65 6846 4641

# Table of Contents

Chapter 1	Quick Start	
	Step 1 Check Hardware .....	1-2
	Step 2 Connect the System .....	1-3
	Step 3 Position the Imager .....	1-4
	Step 4 Install ESP .....	1-5
	Step 5 Select Model .....	1-6
	Step 6 Select Protocol and Connect.....	1-7
	Step 7 Locate the Object in the Field of View.....	1-9
	Step 8 Calibrate .....	1-11
	Step 9 Test Read Rate .....	1-12
	Step 10 Configure the Imager in ESP .....	1-13
	Step 11 Save Configuration in ESP .....	1-14
Chapter 2	Using ESP	
	EZ Mode .....	2-2
	Application Mode .....	2-3
	Menu Toolbar .....	2-4
	Autoconnect.....	2-12
	View .....	2-14
	Navigating in ESP.....	2-15
	Send/Receive Options .....	2-16
Chapter 3	Tube/Cap Inspection	
	Tube/Cap Inspection Serial Commands .....	3-2
	Capture and Test.....	3-3
	Multi-Operation .....	3-4
	Multi-Operation by Serial Command .....	3-5
	Tube/Cap Library .....	3-8
	Tube/Cap Information.....	3-16
Chapter 4	Communications	
	Communications by ESP .....	4-2
	Communications Serial Commands .....	4-3
	Host Port Connections.....	4-4
	Host Protocol .....	4-5
	Poll Address .....	4-7
	ACK/NAK Options .....	4-8
	Polling Mode Options .....	4-9
	RS-422 Status .....	4-10
	Auxiliary Port Connections .....	4-11
	Auxiliary Port System Data Status.....	4-19
	Daisy Chain Autoconfigure .....	4-20
	Response Timeout .....	4-21
	LRC Status .....	4-22
	Protocol Configuration Examples .....	4-23
	USB HID Interface .....	4-24

---

*Table of Contents*

ASCII Character Entry Modifier .....	4-33
Preamble .....	4-34
Postamble .....	4-35
Chapter 5      Calibration	
Calibration Serial Commands.....	5-2
Calibration Overview .....	5-2
Calibration Options .....	5-3
Calibration by ESP .....	5-10
Initiating Calibration .....	5-12
Additional Notes about Calibration .....	5-17
Chapter 6      Read Cycle	
Read Cycle by ESP .....	6-2
Read Cycle Serial Commands .....	6-3
Read Cycle Setup .....	6-4
Multisymbol .....	6-5
Trigger Mode and Duration .....	6-7
External Trigger Polarity.....	6-12
Serial Trigger.....	6-13
Start Trigger Character (Non-Delimited).....	6-14
Stop Trigger Character (Non-Delimited).....	6-15
End of Read Cycle .....	6-16
Capture Mode.....	6-18
Capture Timing.....	6-23
Image Storage.....	6-25
Minimum Good Reads.....	6-28
Chapter 7      Symbologies	
Symbologies by ESP .....	7-2
Symbologies Serial Commands .....	7-3
Data Matrix .....	7-4
QR Code .....	7-6
Code 39 .....	7-7
Code 128 / EAN-128 .....	7-10
BC412 .....	7-13
Interleaved 2 of 5.....	7-14
Code 93.....	7-17
Codabar.....	7-18
UPC / EAN .....	7-21
Pharmacode .....	7-25
GS1 DataBar (RSS) .....	7-27
PDF417 .....	7-29
MicroPDF417 .....	7-31
Composite .....	7-32
Narrow Margins / Symbology Identifier.....	7-33
Chapter 8      I/O Parameters	
I/O Parameters by ESP .....	8-2

I/O Parameters Serial Commands.....	8-3
Symbol Data Output .....	8-5
No Read Message .....	8-8
Bad Symbol Message.....	8-10
No Symbol Message .....	8-10
1D / Stacked Symbology Qualification .....	8-11
2D Symbology Qualification .....	8-12
Read Duration Output.....	8-18
Output Indicators .....	8-19
Beeper .....	8-23
LED Configuration .....	8-24
Serial Verification.....	8-25
EZ Button.....	8-27
EZ Button Modes.....	8-29
Configurable Output 1 .....	8-31
Trend Analysis Output 1 .....	8-34
ISO/IEC 16022 Symbol Quality Output 1 .....	8-37
Diagnostics Output 1 .....	8-40
Tube/Cap Detection Output 1.....	8-41
Configurable Output 2 .....	8-43
Trend Analysis Output 2 .....	8-43
ISO/IEC 16022 Symbol Quality Output 2 .....	8-43
Diagnostics Output 2 .....	8-43
Tube/Cap Detection Output 2.....	8-44
Configurable Output 3 .....	8-45
Trend Analysis Output 3 .....	8-45
ISO/IEC 16022 Symbol Quality Output 3 .....	8-45
Diagnostics Output 3 .....	8-45
Tube/Cap Detection Output 3.....	8-46
Frame Information .....	8-47
Image Output.....	8-48
Database Identifier Output.....	8-51
Quality Output.....	8-52
Power-On/Reset Counts.....	8-53
Time Since Reset .....	8-54
Service Message .....	8-55
EZ Trax Output .....	8-56
<b>Chapter 9 Symbol Quality</b>	
Symbol Quality by ESP .....	9-2
Symbol Quality Serial Commands.....	9-3
Overview of Symbol Quality .....	9-4
Symbol Quality Separator / Data Matrix Output Mode .....	9-5
ISO/IEC 16022 Symbol Quality Output .....	9-7
ISO/IEC 16022 Symbol Quality Output by ESP .....	9-9
Microscan Symbol Quality Output .....	9-10

---

## Table of Contents

Microscan Symbol Quality Output by ESP .....	9-13
Chapter 10    Matchcode	
Matchcode by ESP .....	10-2
Matchcode Serial Commands .....	10-2
Overview of Matchcode .....	10-3
Matchcode Type .....	10-4
Match Replace .....	10-9
Mismatch Replace .....	10-10
New Master Pin .....	10-11
Chapter 11    Camera and IP Setup	
Camera and IP Setup by ESP .....	11-2
Camera and IP Setup Serial Commands .....	11-3
Video .....	11-4
Evaluation .....	11-5
Calibration .....	11-9
Window of Interest .....	11-10
IP Database .....	11-13
Dynamic Setup .....	11-14
Camera Settings .....	11-15
Focal Distance (Read-Only) .....	11-16
Focal Distance Table (Read-Only) .....	11-16
Pixel Sub-Sampling .....	11-17
IP Threshold .....	11-18
IP Mode .....	11-20
Tube/Cap Mode .....	11-21
Image Processing Timeout .....	11-23
Mirrored Image .....	11-25
Hollow Mode .....	11-26
Number of Symbols in Field of View .....	11-27
Damaged Symbol Status .....	11-28
Illumination Brightness .....	11-29
Skew Correction .....	11-30
Color Filter (EZ Match Color Only) .....	11-34
Color Detection (EZ Match Color Only) .....	11-35
Chapter 12    IP Database	
IP Database Serial Commands .....	12-2
Number of Active Indexes .....	12-3
IP Database Status .....	12-4
Database Mode .....	12-10
Save Current Settings to IP Database .....	12-15
Load Current Settings from IP Database .....	12-16
Request Selected Index Settings .....	12-17
Request All IP Database Settings .....	12-18
Chapter 13    Terminal	
Terminal Window .....	13-2

Find.....	13-3
Send .....	13-4
Macros .....	13-5
Terminal Window Menus .....	13-6
<b>Chapter 14 Utilities</b>	
Serial Utility Commands .....	14-2
Read Rate .....	14-4
Counters .....	14-5
Device Control .....	14-8
Differences from Default .....	14-9
Master Database .....	14-10
Firmware.....	14-16
Default / Reset / Save.....	14-19
Imager Status Requests .....	14-21
Other Operational Serial Commands .....	14-23
<b>Chapter 15 Output Format</b>	
Output Format Serial Commands.....	15-2
Output Format Status .....	15-3
Format Assign .....	15-4
Format Extract.....	15-5
Format Insert .....	15-7
Output Filter Configuration .....	15-9
Ordered Output Filter.....	15-13
<b>Appendices</b>	
Appendix A General Specifications .....	A-2
Appendix B Electrical Specifications .....	A-5
Appendix C Serial Configuration Commands .....	A-8
Appendix D Communications Protocol .....	A-15
Appendix E ASCII Table .....	A-24
Appendix F Interface Standards .....	A-25
Appendix G Using an External Trigger .....	A-26
Appendix H Operational Tips.....	A-27
Appendix I USB-to-Serial Virtual COM Port Driver.....	A-28
Appendix J Glossary of Terms .....	A-31
<b>Index</b>	

## About the EZ Match Imager

The key features of the EZ Match Imager are:

- 3 megapixel sensor (color version)
- 1.3 megapixel sensor (monochrome version)
- High-output white LED illumination
- High-speed image processing
- Ability to identify a large database of tube and cap types, and to learn new tube and cap types
- Support for both linear and 2D symbologies
- USB, RS-232, and RS-422/485 connectivity
- A multi-function EZ Button for location, calibration, and read cycle triggering
- A blue target pattern that identifies the center of the field of view
- A green flash (visible from all angles) to signal a tube/cap detection or successful decode
- Easy customization for a variety of specific applications

## About This Manual

This manual provides complete information on setting up, installing, and configuring the imager. The chapters are presented in the order in which an imager might be set up and made ready for operation.

## Highlighting


Serial commands, highlighted command fields, and default command settings are highlighted in **rust bold**. Cross-references and web links are highlighted in **blue bold**. References to **ESP**, its toolbar headings (**Communications**, **Read Cycle**, **Symbologies**, etc.), menu topics, and other points of emphasis, are highlighted in **Bold Initial Caps**.

## Host Communications

There are three ways to configure and test the EZ Match Imager :

- Microscan's Windows-based **ESP** (Easy Setup Program), which offers point-and-click ease of use and visual responses to user adjustments.
- Serial commands, such as **<K100,1>**, that can be sent from **ESP's Terminal** window or another terminal program.
- EZ Button.

## Warning and Caution Summary

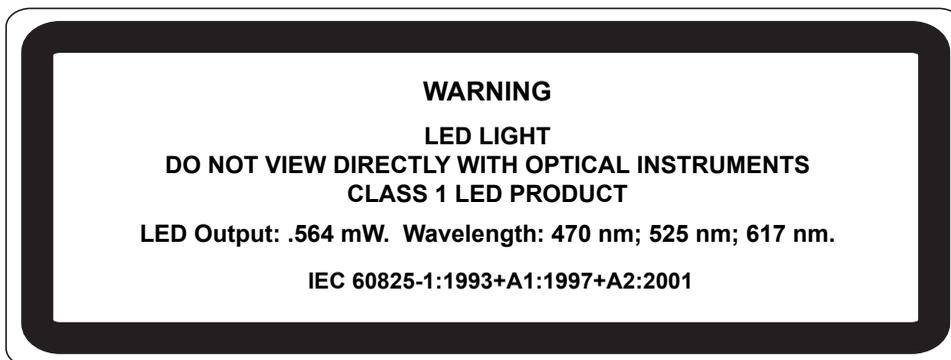

- Viewing the EZ Match Imager's LED output with optical instruments such as magnifiers, eye loupes, or microscopes within a distance of 100 mm could cause serious eye injury.
- Maximum LED output: .564 mW.
- Wavelength: 470 nm; 525 nm; 617 nm.
- Location of the EZ Match Imager's LED aperture window:



LED Aperture Window

**CAUTION:** Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

**IMPORTANT:** The EZ Match Imager is intended for connection to a UL-listed direct plug-in power unit marked Class II and rated 5 VDC at 3.5 Watts, or greater if using electrical accessories.

European models must use a similarly rated Class I or Class II power supply that is certified to comply with standard for safety EN 60950.

## **Statement of Agency Compliance**



The EZ Match Imager has been tested for compliance with FCC (Federal Communications Commission) regulations and has been found to conform to all applicable FCC Rules and Regulations.

To comply with FCC RF exposure compliance requirements, this device must not be co-located or operate in conjunction with any other antenna or transmitter.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



The EZ Match Imager has been tested for compliance with CE (Conformité Européenne) standards and guidelines, and has been found to conform to applicable CE standards, specifically the EMC requirements EN 55024, ESD EN 61000-4-2, Radiated RF Immunity EN 61000-4-3, ENV 50204, EFT EN 61000-4-4, Conducted RF Immunity EN 61000-4-6, EN 55022, Class B Radiated Emissions, and Class B Conducted Emissions.

The EZ Match Imager has been tested by an independent electromagnetic compatibility laboratory in accordance with the applicable specifications and instructions.

## Statement of RoHS Compliance

All Microscan readers with a 'G' suffix in the FIS number are RoHS-Compliant. All compliant readers were converted prior to March 1, 2007. All standard accessories in the Microscan Product Pricing Catalog are RoHS-Compliant except 20-500013-01 and 98-000039-02. These products meet all the requirements of "Directive 2002/95/EC" European Parliament and the Council of the European Union for RoHS compliance. In accordance with the latest requirements, our RoHS-Compliant products and packaging do not contain intentionally added Deca-BDE, Perfluorooctanes (PFOS), or Perfluorooctanic Acid (PFOA) compounds above the maximum trace levels. To view the document stating these requirements, please visit:

<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=CELEX:32002L0095:EN:HTML>

and

<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2006:372:0032:0034:EN:PDF>

Please contact your sales manager for a complete list of Microscan's RoHS-Compliant products.

This declaration is based upon information obtained from sources which Microscan believes to be reliable, and from random sample testing; however, the information is provided without any representation of warranty, expressed or implied, regarding accuracy or correctness. Microscan does not specifically run any analysis on our raw materials or end product to measure for these substances.

The information provided in this certification notice is correct to the best of Microscan's knowledge at the date of publication. This notice is not to be considered a warranty or quality specification. Users are responsible for determining the applicability of any RoHS legislation or regulations based on their individual use of the product.

Regarding "RoHS Directive 2011\_65\_EU" Microscan produces Monitoring and Control Instruments as well as Industrial Monitoring and Control Instruments as defined within the directive. Microscan has developed and is implementing a RoHS2 compliance plan with the intention of bringing all active products listed in our current marketing literature within full compliance as per the directive deadlines.

Key milestones for the transition plan are as follows:

- Complete internal product audit and supplier transition by July 2013.
- Initial "Monitoring and Control Instruments" RoHS2-compliant products available by July 2014.
- Initial "Industrial Monitoring and Control Instruments" RoHS2-compliant products available by July 2015.
- All new products introduced in 2014 are expected to be WEEE and RoHS2 compliant.

Microscan will mark the products with the 'CE' marking that complies with the RoHS2 process to acquire 'CE' certification per the example given: Example 1 >> Machinery directive + EMC directive + RoHS2 = Declaration of Conformity.





# 1 Quick Start

## Contents


- Step 1 Check Hardware ..... 1-2
- Step 2 Connect the System ..... 1-3
- Step 3 Position the Imager..... 1-4
- Step 4 Install ESP ..... 1-5
- Step 5 Select Model..... 1-6
- Step 6 Select Protocol and Connect ..... 1-7
- Step 7 Locate the Object in the Field of View ..... 1-9
- Step 8 Calibrate ..... 1-11
- Step 9 Test Read Rate ..... 1-12
- Step 10 Configure the Imager in ESP ..... 1-13
- Step 11 Save Configuration in ESP ..... 1-14

This section is designed to get your EZ Match Imager up and running quickly, using the EZ Button or **ESP** (Easy Setup Program). Following these steps will allow you to get a sense of the imager’s capabilities and to test tube/cap detection and symbol decode performance. Detailed setup information for installing the imager in your application can be found in the subsequent sections.

Check Hardware

# Step 1 — Check Hardware

Item	Description	Part Number
1	EZ Match Imager	FIS-0004-100XG
2	IC-332 Adapter	FIS-0001-0035G
3	IB-131 Interface Box	99-000018-01
4	Power Supply	97-100004-15 (90-264 VAC, 24 VDC)
5	Object Detector (optional)	99-000017-01
6	Host Cable	61-300026-03

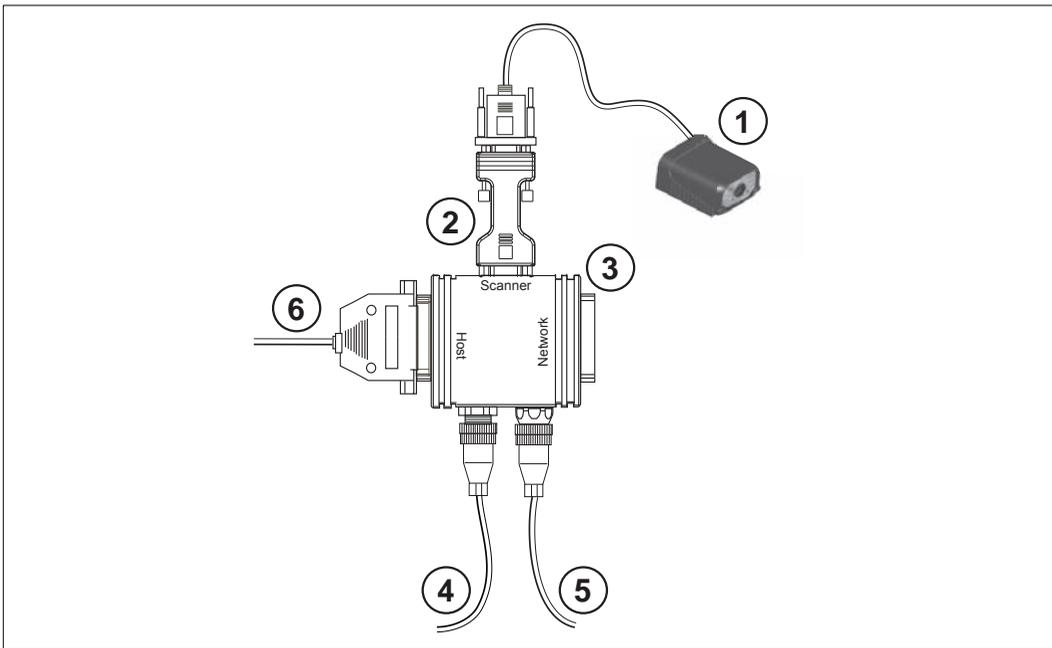

Hardware Required

**Caution:** Be sure that all cables are connected **BEFORE** applying power to the system. Always power down **BEFORE** disconnecting any cables.


## Step 2 – Connect the System

**Caution:** Be sure that all cables are connected **BEFORE** applying power to the system. Always power down **BEFORE** disconnecting any cables.

### Connecting by RS-232 / RS-422 / RS-485

- Connect the imager (1) to the IB-131/IC-332 interface (2) and (3).
- Connect the host cable (6) to the host and to the host port on the IB-131 (3).
- Connect the object detector (5) to the IB-131 (3).
- Connect the power supply (4) to the IB-131 (3).
- Apply power to the imager.


**Important:** If you are using a **USB** model, you must connect the device to the host computer **before** powering-on. Otherwise the unit will not be recognized as a USB device.

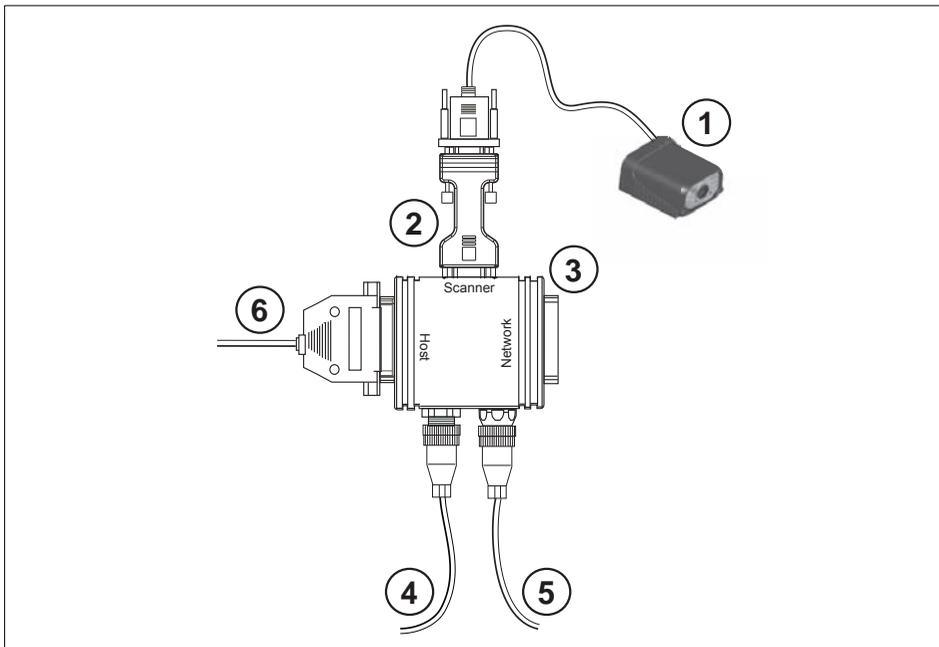


*Hardware Configuration*

## Step 3 — Position the Imager

- Place the imager in an area with as little ambient light as possible.
- Place a black surface behind the area in which test tubes, caps, or symbols will be inspected by the imager.  
The black background provides the contrast necessary for the imager to detect the presence or absence of objects in its field of view.
- Position the imager at a focal distance between **2** and **6** inches from a sample tube, cap, or symbol.
- Position the imager relative to the object to avoid the glare of direct (specular) reflection.  
**Important:** Avoid excessive skew or pitch. Maximum skew is  $\pm 30^\circ$ ; maximum pitch is  $\pm 30^\circ$ . The illustration below shows skew axis, pitch axis, and tilt axis.

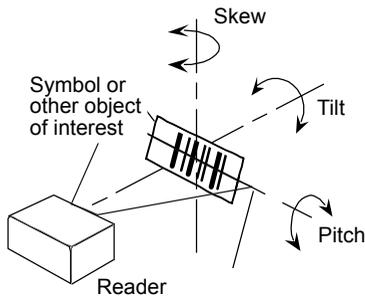

- Objects can be rotated at any angle; however, for best results, objects should be aligned with the FOV (field of view).

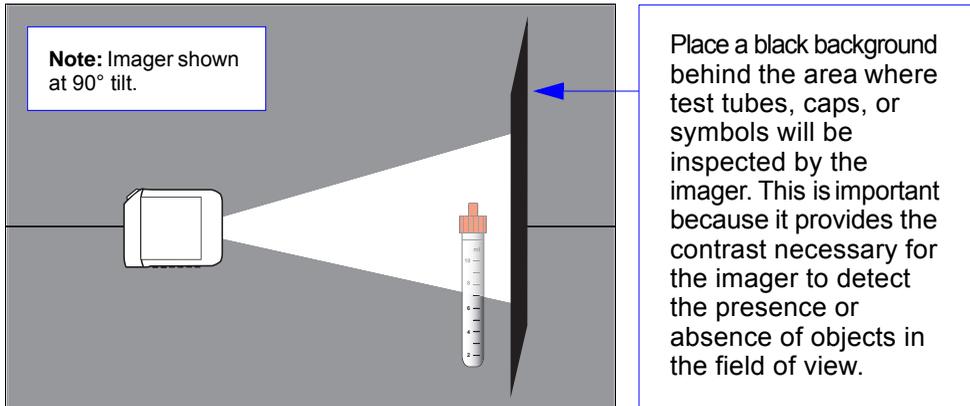

*EZ Match Imager and Object in Field of View*

**Note:** For accuracy of testing and performance, Microscan recommends using a mounting arm adapter kit. Contact your Microscan sales manager for details about mounting arm adapter kits and other accessories.

## Step 4 — Install ESP

**ESP Software** can be found on the Microscan Tools CD that is packaged with the EZ Match.

1. Follow the prompts to install ESP from the CD.
2. Click on the ESP icon to run the program.



**Note:** ESP can also be installed from the **Download Center** at [www.microscan.com](http://www.microscan.com).

### ESP System Requirements

- 166 MHz Pentium processor (recommended)
- Windows Vista, XP, or 2000 operating system
- Internet Explorer 5.0 or higher
- 64 MB minimum RAM
- 50 MB minimum disk space
- 800 x 600 pixel minimum 256 color display

## Step 5 — Select Model

When you start **ESP**, the following menu will appear:




**Important:** An EZ Match Imager must be connected to the host computer for its corresponding icon (shown at left) to appear on the model menu.

The icon will always be present in subsequent **ESP** sessions, even when the EZ Match unit is not physically connected.

1. Click the button showing the EZ Match Imager.
2. Click **OK**.

**Note:** You can also simply double-click the EZ Match button to make your selection.

3. Click **Yes** when this dialog appears:

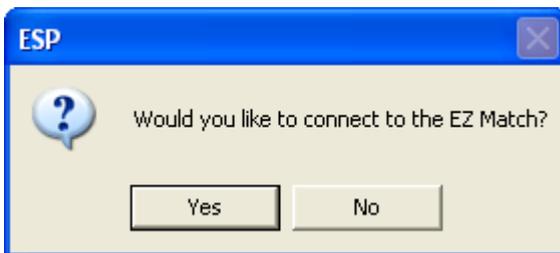

**Note:** If you need to select another model later, click the **Switch Model** button near the top of the screen or use **Model > New Model** in the menu toolbar.

## Step 6 – Select Protocol and Connect

- Choose the connection protocol you are using and click **Connect**.

The screenshot shows a dialog box titled "RS-232" with a close button in the top right corner. On the left side, there is a vertical list of radio buttons: "RS-232" (selected), "Ethernet", and "USB". To the right of this list are several configuration options, each with a dropdown menu: "Baud" (115.2K\*), "Parity" (None\*), "Stop Bits" (One\*), "Data Bits" (Eight\*), and "Port" (COM1). Below these dropdowns are two checkboxes: "Aux Port In Use" and "Force Connect". At the bottom of the dialog, there are three buttons: "Auto Connect", "Connect" (which is highlighted with a blue border), and "Cancel".

- Once you select your communications mode, follow the simple prompts to establish your connection.

## Step 6 — Select Protocol and Connect (cont.)


When you are connected, you will see the green connection indicator in the status bar at the bottom right of your screen.

**RS-232:** CONNECTED Point-to-Point COM1 115.2K : N : 8 : 1

**USB:** CONNECTED USB HID

- If your RS-232 connection attempt fails, click the **Autoconnect** button, select a different communications port, and try again.


**Note:** If your RS-232 host settings cannot be changed to match the imager's settings, check the **Force Connect** box in the **RS-232** dialog and click the **Connect**.

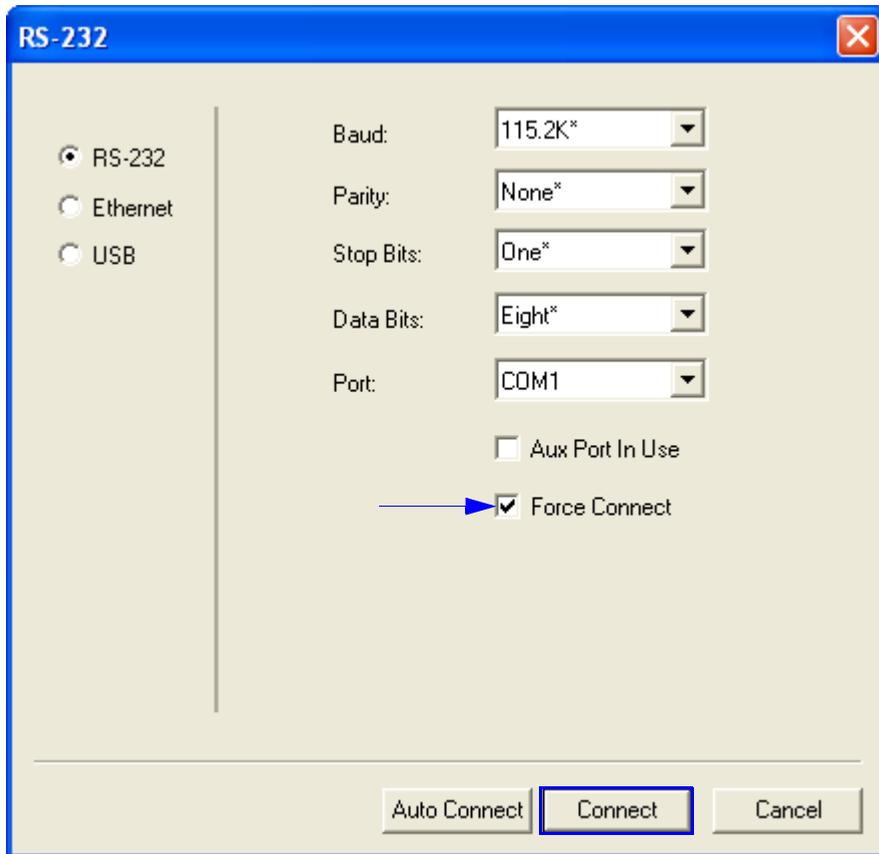

## Step 7 — Locate the Object in the Field of View


### Locate the Object by ESP

- In ESP's **EZ Mode**, click the **Locate** button to enable the blue target pattern.

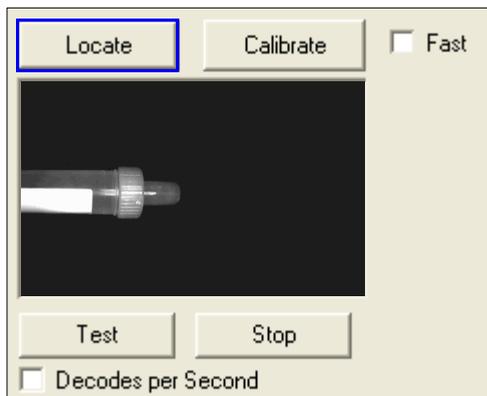

The object in the field of view will appear in the video view beneath the **Locate** and **Calibrate** buttons, and you will see the blue target pattern projected from the front of the imager.

- Center the target pattern on the object.  
At 2 to 3 inches, the pattern resembles an **X**. At 3 to 6 inches, the pattern resembles a **V**.

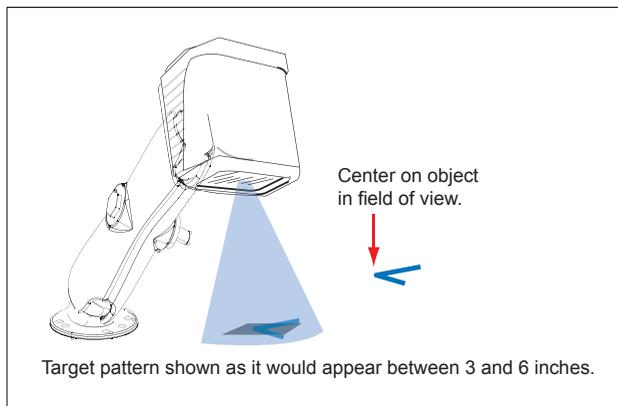


**Important:** The entire object of interest (tube, cap, or symbol) should fall within the field of view (FOV) of the imager. The field of view is what appears in ESP's **Locate/Calibrate** window in **EZ Mode**.

- Click the **Stop** button to end the **Locate** function.



## Locate the Object by EZ Button

If you are not connected to a host computer, the EZ Button allows you to locate an object in the imager's field of view.

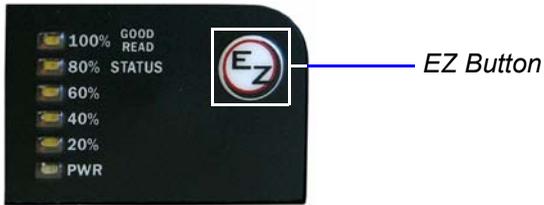


- Hold down the EZ Button for about one second and release when you hear one short beep. The amber **20%** LED will illuminate, and you will see the blue target pattern projected from the front of the imager.
- Center the target pattern on the object.

**Note:** To end all EZ Button functions, press the EZ Button once and quickly release.

## Step 8 – Calibrate

EZ Match settings can be adjusted automatically for optimum tube/cap detection and symbol decoding performance by either the EZ Button or by **ESP**.

During the calibration routine, the reader will flash its amber Read Rate percent LEDs and red illumination LEDs while searching camera settings and determining the best configuration for detecting tubes or caps, or for decoding symbol data. Upon successful completion of this routine, a green LED pattern will flash brightly and illuminate the object. If unsuccessful, the imager will emit 5 short beeps and stop searching.

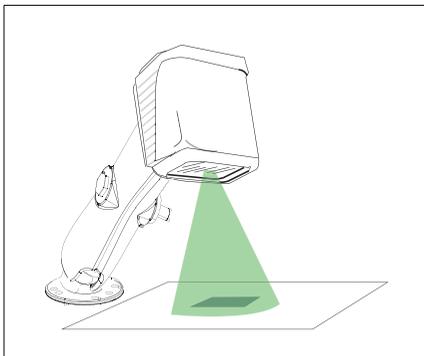

### Calibrate by EZ Button

1. Hold down the EZ Button for about two seconds and release when you hear **two short beeps**. The **20%** and **40%** LEDs will illuminate.
2. The imager will search camera settings to determine the best configuration for detecting tubes or caps, or for decoding symbol data.

**Note:** To end all EZ Button functions, press the EZ Button once and quickly release.

### Calibrate by ESP

1. Click the **Calibrate** button.



2. The imager will search camera settings to determine the best configuration for detecting tubes or caps, or for decoding symbol data.

A successful calibration will display a green frame around the object, and the following message will appear: "Uploading all reader parameters." After a moment the tube/cap data and/or symbol data will be presented in the field below the image display window.

### Calibrate by Serial Command

Send **<@CAL>** from a terminal program to begin calibration.


## Step 9 — Test Read Rate

**Read Rate** indicates the number of tube/cap detections or successful decodes per second achieved by the imager.

### Test Read Rate by EZ Button

1. To start the Read Rate test, hold down the EZ Button about three seconds until you hear **three short beeps**. The **20%**, **40%**, and **60%** LEDs will illuminate.

While the object is being inspected, the Read Rate LEDs will indicate the corresponding read rate percentage on the back of the unit.

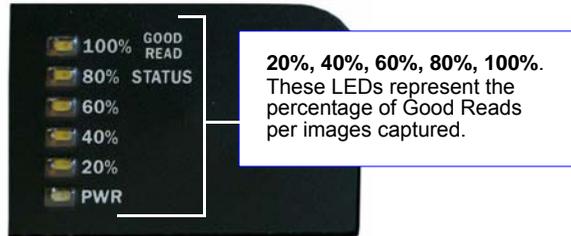

2. To end the Read Rate test, press the EZ Button and quickly release.

### Test Read Rate by ESP

1. Click the **Test** button to start the Read Rate test and **Stop** to end it.



If a tube or cap has been successfully detected, or a symbol has been successfully decoded, the object's data and related features will be presented in the field below the image display window. Also, while the object is being inspected, the Read Rate LEDs will indicate the corresponding Read Rate percentage on the back of the unit.

2. To end the test, click the **Stop** button.

**Note:** Read Rate can also be tested using the **Read Rate** interface in **Utilities**.

### Test Read Rate by Serial Command

You can also start a test with the **<C>** or **<Cp>** command and end it with the **<J>** command.

## Step 10 — Configure the Imager in ESP

To make setup changes to the EZ Match Imager, click the **App Mode** button.




The following modes are accessible by clicking the buttons in the first row of **App Mode** icons:



- Click the **EZ Mode** button to return to EZ Mode.
- Click the **Autoconnect** button to establish communication.
- Click the **Send/Recv** button to send or receive commands.
- Click the **Switch Model** button to open the model menu, or to return to a previous model.
- Click the **EZ Match** button to Test the imager and to configure Multi-Operation settings, tube/cap Library settings, and tube/cap detection Messages.
- Click the **Parameters** button to show the tabbed tree controls for Communication, Read Cycle, Symbolologies, I/O Parameters, Symbol Quality, Matchcode, and Diagnostics.
- Click the **Setup** button to access a Camera Setup tree control and Video view, and to Evaluate image captures, Calibrate the imager, set the Window of Interest, fine-tune capture settings and processing settings in the IP Database, set up output filters and parse symbol data in Ordered Output and Output Format, and control multiple read cycle functions in Dynamic Setup.
- Click the **Terminal** button to display tube or cap detection data or decoded symbol data, and to send serial commands to the imager using text or macros.
- Click the **Utilities** button to test Read Rate, request or clear Counters, enable or disable the imager or send output pulses in Device Control, determine the Differences from Default in the current settings, add or remove master symbol data in Master Database, and verify or update the imager's Firmware.

For further details, see **ESP Help** in the dropdown Help menu.

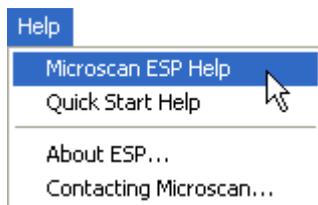

## Step 11 — Save Configuration in ESP

To make changes to a configuration setting:

1. **Left click** on the + to expand the desired tree.

2. **Double click** on the desired parameter and click once in the selection box to view options.

3. Place your cursor in the selection box, scroll down to the setting you want to change, and **click** once on the setting.

4. **Left click** again on the open screen to complete your selection.

5. **Right click** on the open screen and select **Save to Reader** to implement the command in the imager.

Parameters	ESP Values
[-] Communications	
[-] RS232/422 Host Port	
[+] Host Port Connections	
[+] Host Protocol	
Host 422 Status	
[+] RS232 Auxilliary Port	
[+] USB HID Report Status	
[+] Preamble	Disabled*
[+] Postamble	Disabled*
Response Timeout	Enabled
LRC Status	Disabled
Aux Port System Data Status	Disabled

### Saving Options

- **Send, No Save.** Changes will be lost when power is re-applied to the imager.
- **Send and Save.** This activates all changes in current memory *and* saves to the imager for power-on.

# 2 Using ESP

## Contents

EZ Mode.....	2-2
Application Mode.....	2-3
Menu Toolbar.....	2-4
Autoconnect.....	2-12
View.....	2-14
Navigating in ESP.....	2-15
Send/Receive Options.....	2-16

This section is designed to help you understand the basic structure and elements of **ESP** (Easy Setup Program).

When you open **ESP**, unless otherwise specified in the **ESP Preferences** dialog accessible from the **Options** heading on the menu toolbar, you will enter **EZ Mode** for initial setup.

From there, you can enter **Application Mode (App Mode)** and access several configuration menus (**Communications**, **Read Cycle**, **Symbologies**, **I/O Parameters**, **Symbol Quality**, **Matchcode**, and **Diagnostics**), a **Camera** setup interface, a **Terminal** interface, a **Utilities** interface, and an **Output Format** interface.

**ESP** can be used to configure the EZ Match Imager in three different ways:

- **Tree Controls:** Each configuration menu contains a list of all option settings that pertain to that specific element of imager operation. For example, the **Communications** menu shows a **Host Port Connections** option, and then a list of the sub-options **Baud Rate**, **Parity**, **Stop Bits**, and **Data Bits**. Each of these sub-options is configurable by using dropdown menus.
- **Graphic User Interfaces:** Imager settings can be configured using such point-and-click tools as radio buttons, zoom in/zoom out sliders, spin boxes, check boxes, and drag-and-drop functions.
- **Terminal:** **ESP's Terminal** allows you to send serial configuration and utility commands directly to the imager by typing them in the provided text field.

Information about using **ESP** in specific applications is provided in subsequent sections.

For **ESP** system requirements, see [ESP System Requirements](#) in Chapter 1, [Quick Start](#).

# EZ Mode


In **EZ Mode** you are presented with the **Locate**, **Calibrate**, and **Test** options. After connecting to your imager, **EZ Mode** is the screen you will see. You will be provided with on-screen instructions that will help you with positioning, testing, and calibration.

## Test

Click the **Test** button to start the Read Rate test for a quick indication of the imager's read capabilities and the limits of your application. When **Decodes per Second** is unchecked, the test will count the percentage of decodes relative to the number of actual scans. Click **Stop** to end the test.

## Calibrate

The calibration routine that will optimize the imager by comparing Read Rates at various camera and image processing settings.

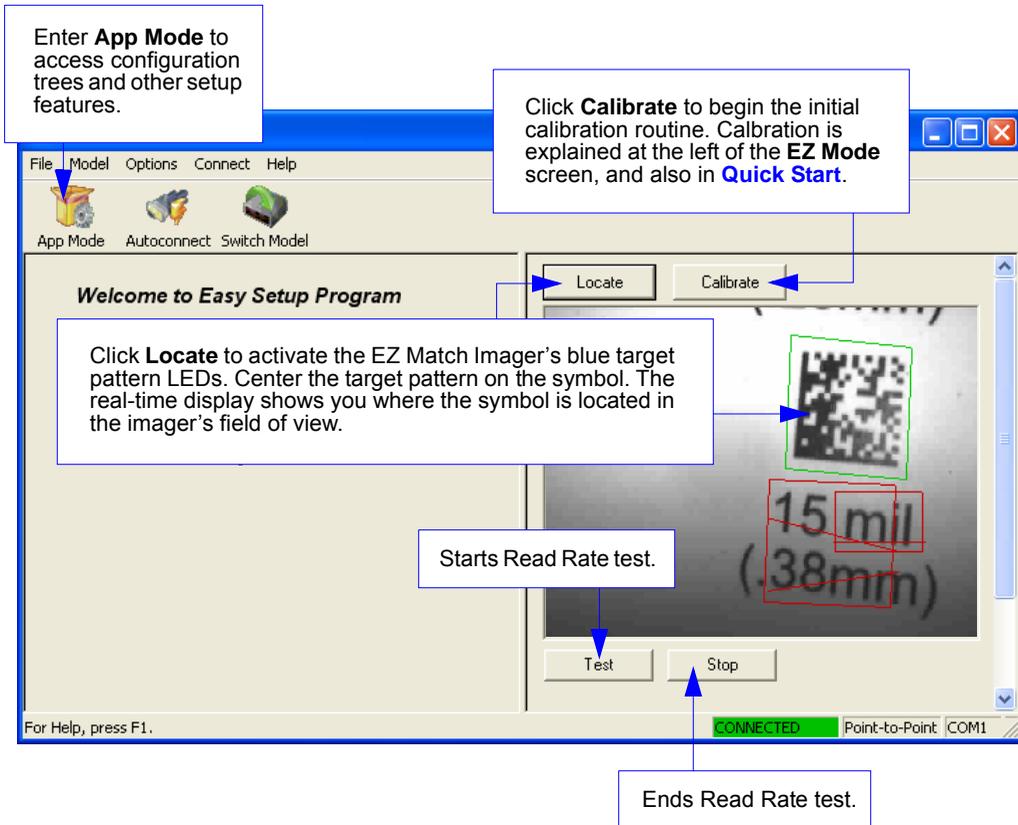



# Menu Toolbar

## File > New


Whenever **New** is selected, the default configuration of **ESP** is loaded.

## Open/Save

When **Save** or **Save As** is selected, the **ESP** configuration is saved to the host computer's hard drive and available whenever the same file is selected under **Open**.

**Important:** When you save menu changes to your hard drive, these changes are not saved to your imager. The illustration below shows how settings can be saved and received between **ESP** and the imager, and **ESP** and the host hard drive.

File	
New	Ctrl+N
Open...	Ctrl+O
Save	Ctrl+S
Save As...	
Print...	Ctrl+P
Import...	
Export...	
Recent File	
Exit	

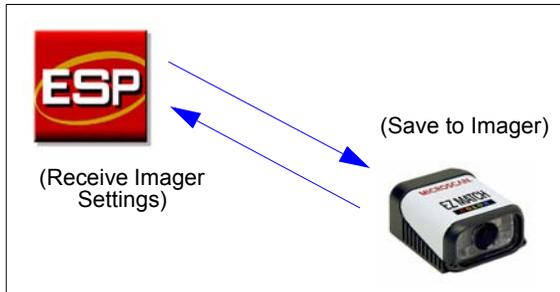

## Import/Export

**Import** converts the ASCII settings from a text file to **ESP** configuration settings.

**Export** converts the active **ESP** configuration settings to an ASCII text file.

## Model

In **Model** you can select any of the models shown in **ESP's** model menu. When you choose another model, your current connection to your present model will be terminated.

To connect to another model, select **New Model**, choose a new model from the menu, and click **OK**.



**Note:** All the models you have enabled by selecting will continue to appear in the Model menu and that the same menu is repeated when clicking the **Switch Model** icon.




When you save your **ESP** file, you will be saving the settings of all the models defined in a single **ESP** file.


## Options

The **Options** menu allows you to save memos and set up **ESP Preferences**.

**Note:** Preferences will be saved and loaded into **ESP** when **ESP** is opened next, whether or not you save the **ESP** file.

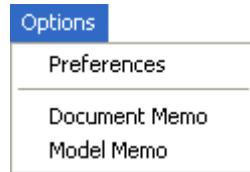

## Preferences > General Tab

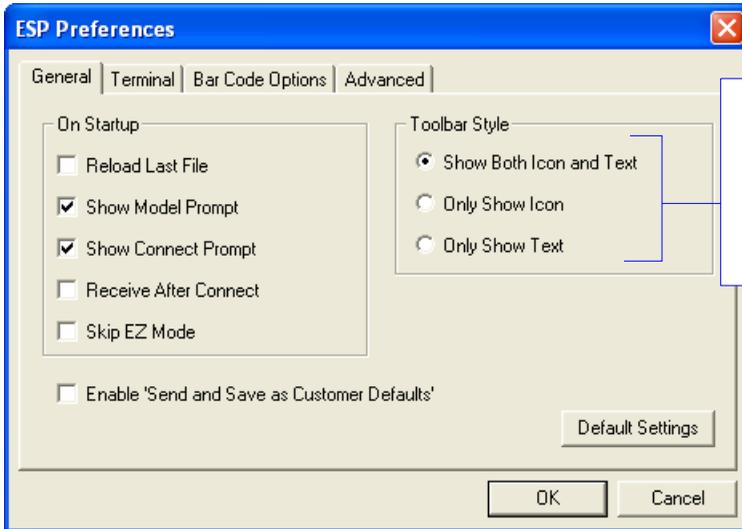

The **Toolbar Style** options allow you to determine how **ESP** will display the mode options in the two rows at the top of the screen.

### **Reload Last File**

At startup, reloads the last file saved to the host computer's hard drive.

### **Show Model Prompt**

At startup, shows the model menu displaying all supported readers.

### **Show Connect Prompt**

At startup, displays the **Would you like to connect to the EZ Match?** prompt.

### **Receive After Connect**

At startup, loads the imager's settings into **ESP**. (This is not recommended if you want to preserve your **ESP** settings for future use.)


### **Skip EZ Mode**

At startup, skips **EZ Mode** and opens directly in **App Mode**.

### **Enable 'Send and Save as Customer Defaults'**

At startup, enables the **Send and Save as Customer Defaults** option in the **Send/Recv** command.

## Preferences > Terminal Tab

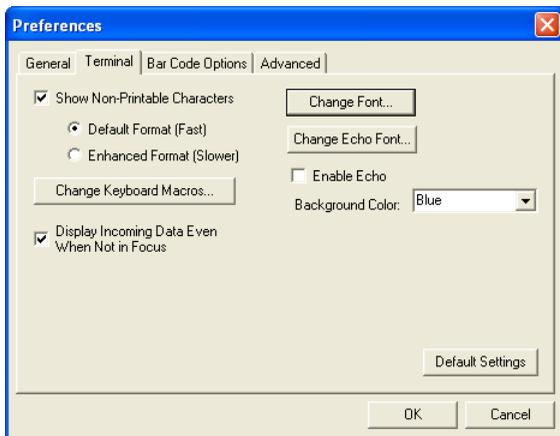

### Show Non-Printable Characters

When **Show Non-Printable Characters** is enabled, characters such as “CRLF” will be displayed in the Terminal window. When **Enhanced Format** is checked, the characters are displayed with more detailed formatting.

### Change Keyboard Macros

Clicking the **Change Keyboard Macros** button brings up the **Function Keys** dialog. In this dialog you can select the desired function key and then enter your macro keystrokes in the associated key map. For example, to make **Ctrl-F2** the keystroke to send a trigger character, select **F2**, then in the **Ctrl** row, enter **<trigger character>** and click **OK**. Then whenever the **Ctrl-F2** keystroke is pressed, the trigger character will start the read cycle.



**Note:** The **F1** key is reserved for opening **ESP Help** and the **F3** key is reserved for the **Find Next** function.

### Change Font

Allows you to modify the font used for decode data received from the imager on the Terminal screen.

### Change Echo Font

Allows you to modify the font used for command characters typed into the Terminal view.


### Enable Echo

Allows you to enter command characters in Terminal.

### Display Incoming Data Even When Not in Focus

When **Display Incoming Data Even When Not in Focus** is enabled, data from the imager will continue to appear in the Terminal even when **ESP** is not the top window.

## Preferences > Bar Code Options Tab

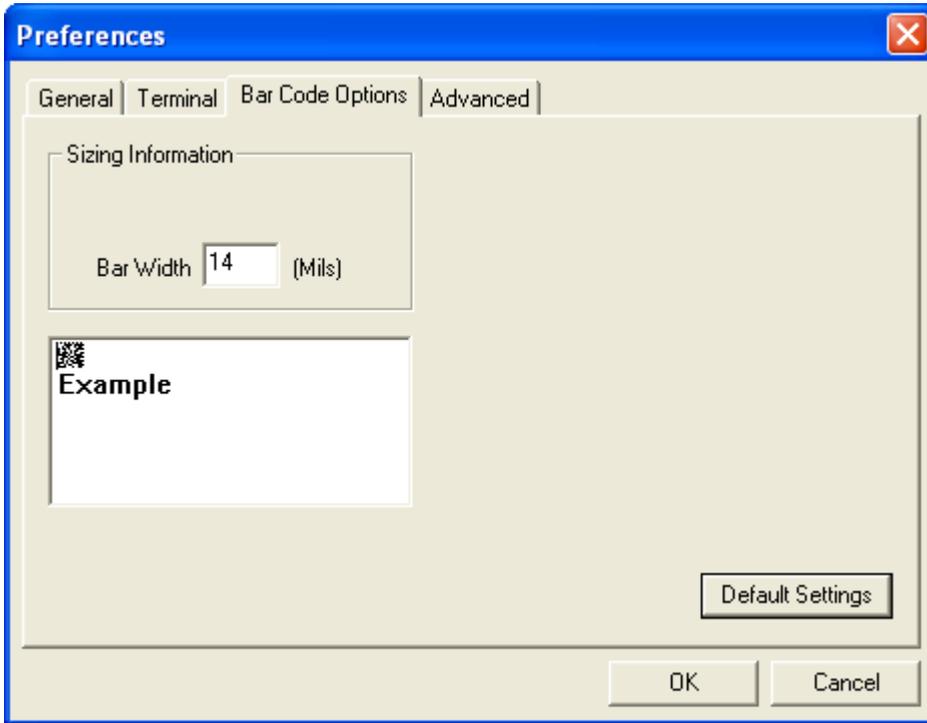


The **Bar Code Options** dialog allows you to set the size of user-created symbols.

### ***Sizing Information***

Sets the bar width or module width (in **mils**, or thousandths of an inch) of user-created symbols.

*Example:* A bar width of 14 is 0.014 inches.

## Preferences > Advanced Tab

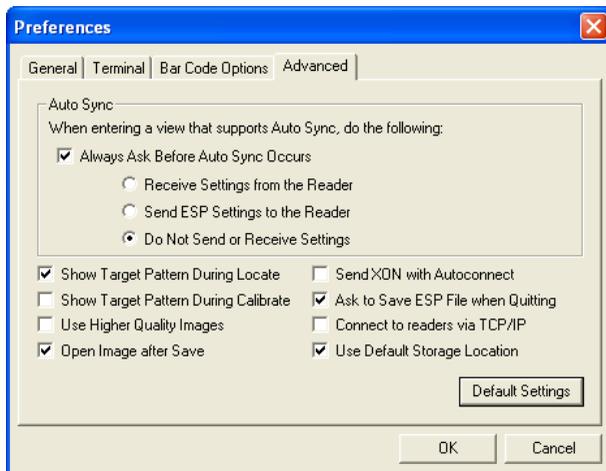

The **Auto Sync** options at the top of the **Advanced** tab allow you to determine whether Auto Sync will be enabled automatically in sections of **ESP** where it is used, or if it will ask you before it enables Auto Sync functions.

### ***Always Ask Before Auto Sync Occurs***

If you check this option box, you are then able to determine what specific Auto Sync functions will be enabled. **Receive Settings from the Reader** will automatically send the imager's settings to **ESP** when Auto Sync is enabled. **Send ESP Settings to the Reader** will automatically send all imager configuration settings chosen in **ESP** to the imager. **Do Not Send or Receive Settings** creates a condition in which Auto Sync will not automatically send imager settings to **ESP**, or send **ESP** settings to the imager.

### ***Show Target Pattern During Locate***

Allows you to determine whether the blue LED target pattern will be on or off during the **Locate** routine.

### ***Show Target Pattern During Calibrate***

Allows you to determine whether the blue LED target pattern will be on or off during the **Calibrate** routine.

### ***Use Higher Quality Images***

Sets **ESP** to output images at a higher resolution than standard JPEG format.

### ***Open Image after Save***

When **Open Image after Save** is enabled, **ESP** automatically opens saved image captures. Images can be saved from the **Evaluation** tab in the **Camera** view, or by right clicking an image in any other image capture view and then saving.


### ***Send XON with Autoconnect***

Sends an **XON (Begin Transmission)** command to the imager before starting the **Autoconnect** routine.


## Preferences > Advanced Tab (cont.)

### Ask to Save ESP File when Quitting

When enabled, prompts the user to save a **.esp** file when ending a session.

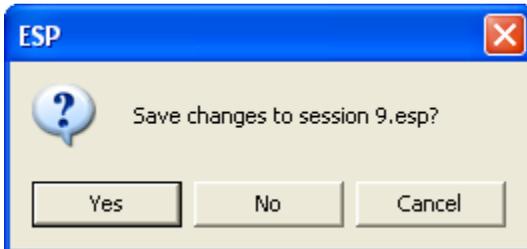


The **.esp** file will be saved in the location of your choice.

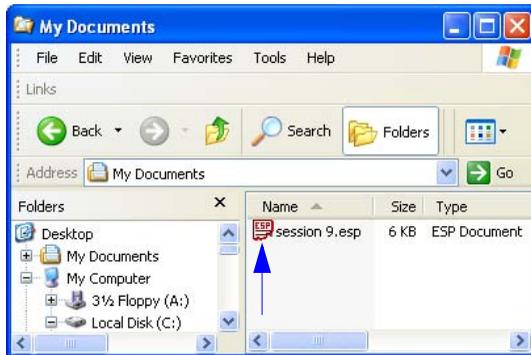

### Connect to Readers via TCP/IP

When enabled, shows an **Ethernet** option on the connection dialog.

**Note:** This option should only be selected if you intend to connect using an Ethernet adapter.

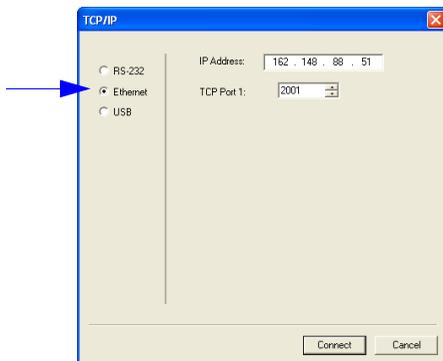


### Use Default Storage Location

When enabled, automatically stores data in **ESP's** Application Data folder.


## Document Memo

The information you type in the **Document Memo** field will appear in a context-sensitive text box whenever your cursor hovers over the **Document Memo** item on the **Options** menu.

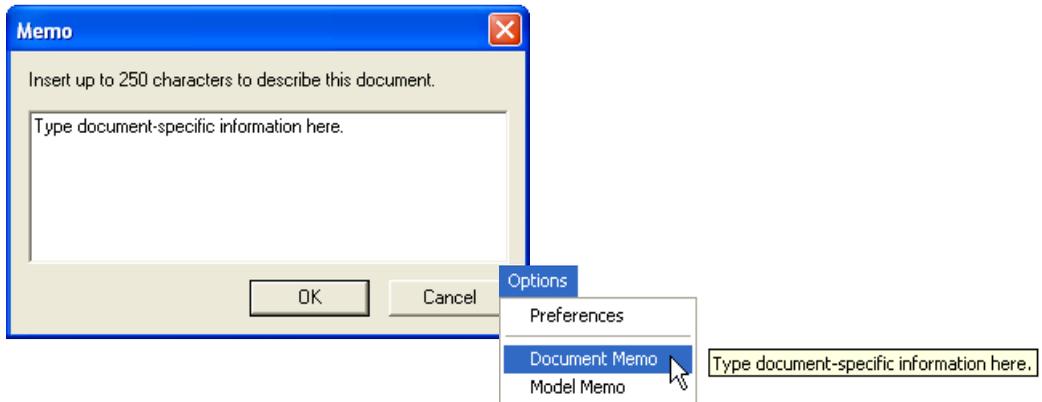

## Model Memo


Similar to **Document Memo**, the information you type in the **Model Memo** field will appear in a context-sensitive text box whenever your cursor hovers over the **Model Memo** item on the **Options** menu. Memos created in **Model Memo** are specific to the model enabled when the message was created.

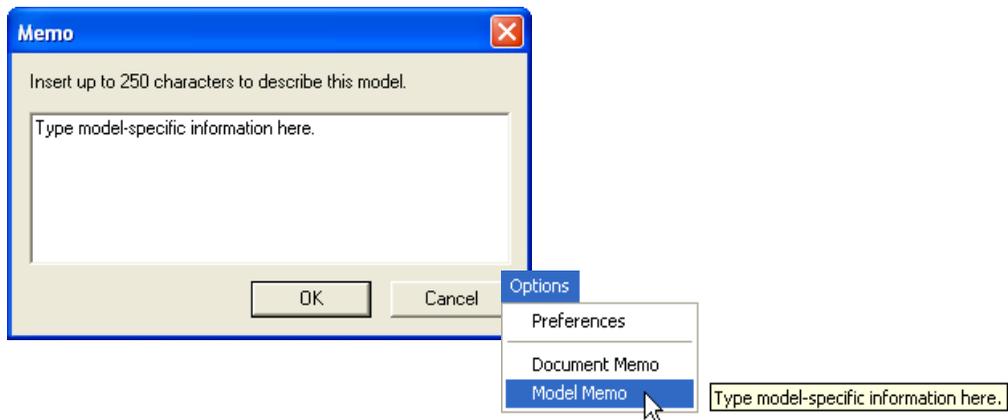

**Note:** Memos must be saved in a **.esp** file if you want them to be available in your next session. If you do not save your current session, any memos that you have entered during the session will be discarded, and will be unavailable in your next session.


# Autoconnect

- If your RS-232 connection attempt fails, you can use **Autoconnect** to establish a connection between the imager and the host.

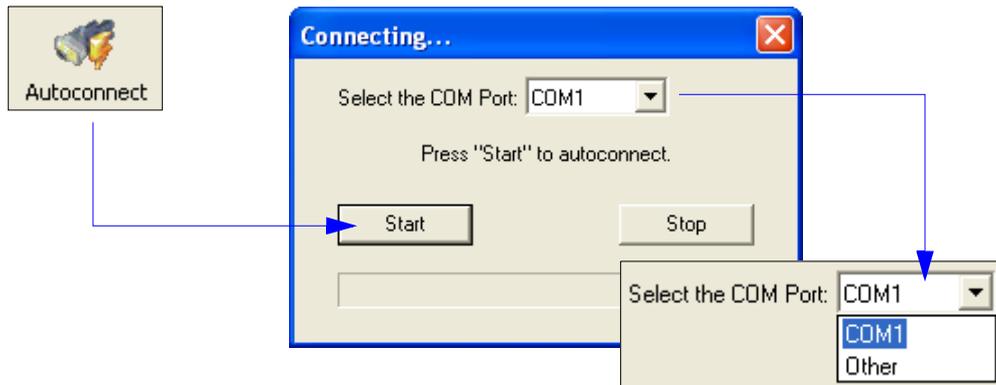


- If your communications port is not the default **COM1**, use the dropdown menu to change your port.

- Once you have chosen the correct port, click **Start** to connect.

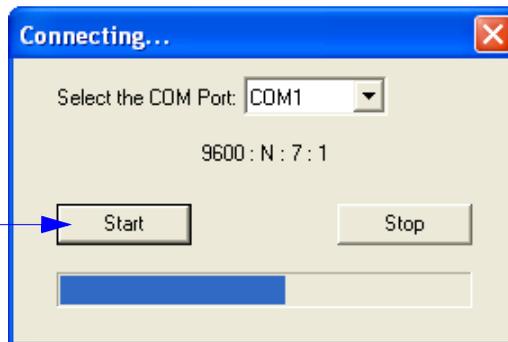

When you are connected, you will see the green connection indicator in the status bar at the bottom right of your screen:




**Important:** If you are using a **USB** model, you must connect the device to the host computer **before** powering-on. Otherwise the unit will not be recognized as a USB device.

## Autoconnect (cont.)


If your RS-232 host settings cannot be changed to match the imager's settings:

- Click **Connect** on **ESP's** menu toolbar, and then select **Connection Wizard**.
- When the connection dialog appears, check the **Force Connect** box and click the **Connect** button.

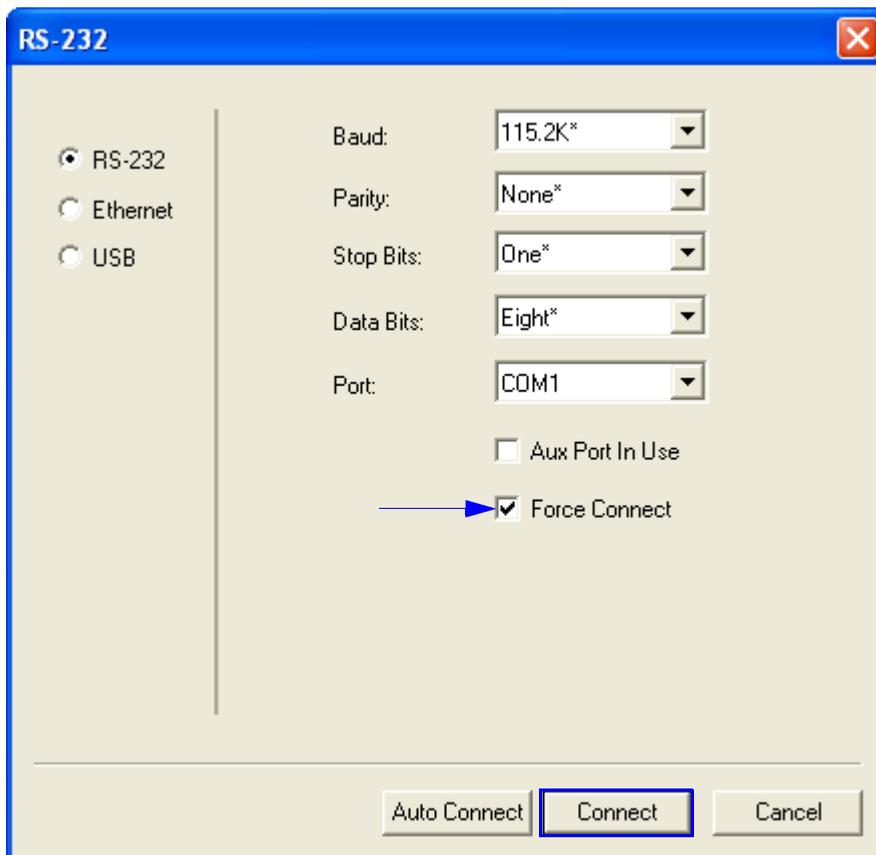

# View

The **View** menu allows you to move quickly between interfaces without using the icon buttons on the **App Mode** toolbar. It also allows you to access the **Bar Code Dialog**.

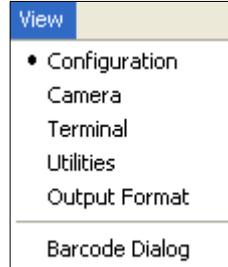

## Bar Code Dialog

In the **Bar Code Dialog** you can create symbols by typing the text you wish to encode. This is a useful tool for creating configuration symbols, allowing you to configure your reader by reading the symbols you create.

The screenshot shows the 'Bar Code Configuration' dialog box with several callouts:

- Print...** and **Save As...** buttons at the top.
- Bar Code Value** field with left and right arrow buttons. Callout: "Drag specific configuration values from the tree control directly into this field to encode new symbols."
- Rotation** dropdown menu set to "0 Degrees" and a **New** button. Callout: "Choose a spatial orientation for the new symbol."
- Caption** section with radio buttons for "Same As Bar Code Value" (selected) and "Specify" (with an empty text field). Callout: "Set a human-readable caption for the symbol that matches the encoded data, or write your own caption."
- Checkboxes for "Add start configuration code" and "Add end configuration code; Save Settings".
- A button labeled "Differences from Default Settings".
- A preview area at the bottom showing a bar code symbol with callouts: "The symbol you create will be displayed in the field at the bottom of the **Bar Code Dialog**."

## Navigating in ESP

To change imager settings, or to access the **Utilities**, **Camera**, **Terminal**, or **Output Format** views, click the **App Mode** button.



To return to **EZ Mode**, click the **EZ Mode** button.




**To make changes to configuration settings in the tree controls:**

1. **Left click** on the + to expand menu items.
2. **Double-click** the desired parameter and **single-click** in the selection box to view options.
3. Place your cursor in the selection box, scroll down to the setting you want to change, and **single-click** the setting.

Parameters	ESP Values
[-] Camera Setup	
[-] Camera Settings	
Illumination Brightness	
Focus Distance	400
Sub-sampling	Disabled*
[-] Window of Interest	
Top	4 : 1
Left	16 : 1
Height	1024
Width	1280
[-] Image Processing Settings	

The X denotes the default option setting.

4. **Left click** again on the open screen to complete the selection.
5. **Right click** on the open screen and select **Save to Reader** to implement the command in the imager. You can send the command without saving it, or you can send and save the command simultaneously.

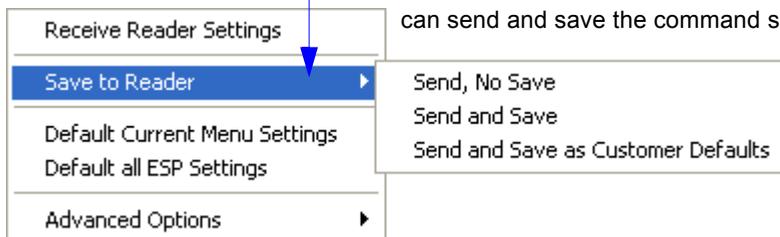

# Send/Receive Options

To access **Receive**, **Save** and **Default** options, click the **Send/Recv** button. You can also access these options by right-clicking in any of the configuration views.



## Receiving

From the **Send/Recv** menu, select **Receive Reader Settings**.

**Caution:** Do not select this option if you do not want to upload the imager's settings. For example, if your **ESP** file has a number of custom settings that you want to maintain and download into the imager, these settings would be lost by choosing **Yes**.

This is useful if you want to receive (upload) the imager's settings and save them as a file for future use. For example, if your imager has settings that you do not want to change, choosing **Yes** would allow you to load those settings to **ESP** and save them in an **ESP** file for later retrieval.

Receiving the imager's settings will also assure that you will not be subsequently saving any unwanted changes that you or someone else has made previously in **ESP**.


## Saving

### Send, No Save (<A>)

Saves **ESP** settings to current memory.

### Send and Save (<Z>)

Activates all changes in current memory *and* saves to the imager for power-on.

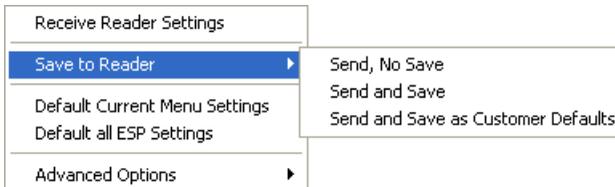

### Send and Save as Customer Defaults (<Zc>)

Saves your default settings for quick retrieval.

This option will be visible only if you have checked **Enable 'Send and Save as Customer Defaults'** in **ESP Preferences**.

## Defaulting

When you select **Default Current Menu Settings** or **Default all ESP Settings**, you are only defaulting the **ESP** settings.


## Advanced Options

### Send Current View

This is the same as **Save to Reader > Send No Save** except that only the commands in the current configuration tree are sent.

### Send Current Command

This is the same as **Send Current View**, except that it saves only the command that is currently selected.

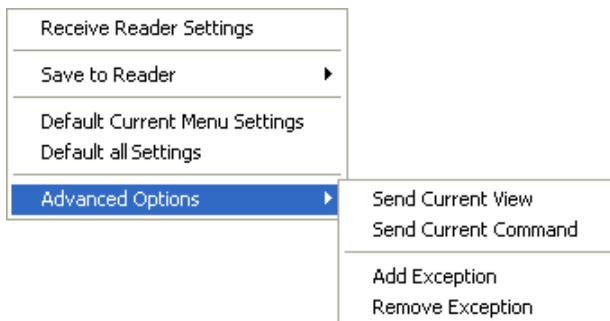

### Add / Remove Exception

After you perform a **Receive Reader Settings** command and you click on the **Add Exception** option, you may see a list of serial commands. These are commands that may be in your imager's firmware, but not included in, or different from, your current version of **ESP**.

You can edit these commands by double-clicking on them and changing them as needed.

It is important to note that these commands will be saved to your imager whenever you send a **Save to Reader** command, or an **<A>** or a **<Z>** command.

Also, if there is a corresponding **ESP** menu item, the **ESP Value** column for that item will be blank following a **Receive Reader Settings** command.



# ■ 3 *Tube/Cap Inspection*

## **Contents**

Tube/Cap Inspection Serial Commands .....	3-2
Capture and Test .....	3-3
Multi-Operation .....	3-4
Multi-Operation by Serial Command .....	3-5
Tube/Cap Library .....	3-8
Tube/Cap Information .....	3-16

This section explains how to configure the EZ Match Imager to identify specific tube and cap characteristics, and how to manage the data that is acquired during tube/cap detection and symbol decoding operations.

## Tube/Cap Inspection Serial Commands

Active Tube/Cap Library Indexes	< <b>K257</b> , <i>number of active indexes</i> >
Tube/Cap Dimensions	< <b>K258</b> , <i>index,tube diameter,cap base length,cap tip length,cap base diameter,cap tip diameter,hue,saturation,value</i> >
Multi-Operation	< <b>K260</b> , <i>index,operation,frame count,timeout,database min,database max</i> >
Tube/Cap Information	< <b>K850</b> , <i>separator,library index,tube angle,tube/cap tip position,cap color,match status,tube diameter</i> >
Tube/Cap Message Formatting	< <b>K851</b> , <i>cap presence message index,cap absence message index,cap unknown message index,tube presence message index,tube absence message index</i> >
Tube/Cap Message Editing	< <b>K852</b> , <i>index,message</i> >

# Capture and Test



Click the **EZ Match** button and then the **Test** tab to display the view shown below.

The screenshot shows the 'Test' tab of the EZ Match software. At the top, there are tabs for 'Test', 'Multi-Operation', 'Library', and 'Messages'. The 'Test' tab is active, displaying a video feed of a tube with a white label and a grey cap. Below the video feed, there are three main control buttons: 'Capture and Test', 'Mirror Image', and 'Contrast'. Below these buttons is a table with two columns: 'Attribute' and 'Value'. The 'Attribute' column contains several rows of text, and the 'Value' column contains corresponding values. The 'Capture and Test' button is highlighted with a blue box. The 'Mirror Image' and 'Contrast' buttons have checkboxes next to them. The 'Mirror Image' checkbox is checked, and the 'Contrast' checkbox is unchecked. The table below the buttons is partially visible, showing several rows of data.

Captures an image of the tube, cap, and/or symbol in the field of view and tests **Multi-Operation** settings ("Bar Code Reader", "Tube Detection", and "Cap Detection").

When enabled, shows the reverse of the original image capture.

When enabled, shows the image in higher contrast than the default contrast value.

Tube or cap detection results are shown in this field, as well as symbol data when applicable.

# Multi-Operation



Click the **EZ Match** button and then the **Multi-Operation** tab to display the following view.

**Note:** Default Multi-Operation configuration shown below.

Test | Multi-Operation | Library | Messages

Auto Sync Multi-Operation Database

**Operation 1**

Operational Flow:  Enabled  
 Bar Code Reader  
 Tube Detection  
 Cap Detection

Operation Switch:  Frame (1) |  Timeout (1000) ms

IP Database Range: Minimum (1) | Maximum (1)

**Operation 2**

Operational Flow:  Enabled  
 Bar Code Reader  
 Tube Detection  
 Cap Detection

Operation Switch:  Frame (1) |  Timeout (1500) ms

IP Database Range: Minimum (2) | Maximum (2)

**Operation 3**

Operational Flow:  Enabled  
 Bar Code Reader  
 Tube Detection  
 Cap Detection

Operation Switch:  Frame (1) |  Timeout (1000) ms

IP Database Range: Minimum (3) | Maximum (3)

Default | **Go to the IP Database** | Receive | Send | Send and Save

Each operation can be assigned a range of IP Database indexes. Click **Go to IP Database** to configure capture settings and processing settings for each index.

**Note:** All functions in the above view can be set using the **Multi-Operation** serial command **<K260>**.

# Multi-Operation by Serial Command

**Multi-Operation** allows users to customize triggered read cycle operations, and to perform those customized operations in a specific sequence. A specific range of IP Database indexes (from **1** to **10**) can be assigned to each operation. Switching from one operation to the next can be configured to occur on an image frame count (from **1** to **6**) or on a user-defined timeout (**1** ms to **65535** ms).

The Multi-Operation read cycle is defined to work with the same features and configuration settings as a normal read cycle.

**Important:** Multi-Operation is only active when the imager is in a **triggered read cycle**.

## Default Multi-Operation Configuration

Index	Operation		Frame Count ( <i>Rapid Capture Mode only</i> )	Timeout	Database Range	
					Min	Max
1	Bar Code Reader	1	0	1000	1	1
2	Tube/Cap Detection	4	0	1500	2	2
3	Disabled	0	0	1000	3	3

## Index (Multi-Operation)

Serial Cmd: <**K260,index,operation,frame count,timeout,database min,database max**>

Options: 1 to 3

## Operation (Multi-Operation)

**Definition:** Specifies the operational flow of the read cycle, and allows up to **3** different operations to be sequenced in a single read cycle. The **operation** field is a bit field, and multiple processes can be defined for a single operation. The examples below demonstrate how to configure a tube and cap detection process to be defined in a single operation.

*Tube and Cap Detection Operation = 2 + 4 = 6*

**Serial Cmd:** <K260,index,**operation**,frame count,timeout,database min,database max>

**Options:** Disabled = 0  
Bar Code Reader = Add 1  
Tube Detection = Add 2  
Cap Detection = Add 4

### Disabled

When set to **Disabled**, no processing is specified for the operation.

### Bar Code Reader

Read cycle operation for the duration of the specified time and number of frames will include processing of image frames for enabled symbologies.

### Tube Detection

Read cycle operation for the duration of the specified time and number of frames will include processing of image frames for presence or absence of test tubes.

### Cap Detection

Read cycle operation for the duration of the specified time and number of frames will include processing of image frames for presence or absence of test tube caps.

## Frame Count (Multi-Operation)

**Definition:** **Frame Count** only applies if the imager is configured in a **Rapid Capture** mode of operation. The frame count value indicates the number of image frames that will occur before the read cycle will switch to the next operation.

**Serial Cmd:** <K260,index,operation,**frame count**,timeout,database min,database max>

**Default:** **0 = Disabled**

**Options:** 1 to 6

## **Timeout (Multi-Operation)**

**Note: Multi-Operation Timeout** applies only to the specified operation (1 through 3).

**Definition:** **Timeout** indicates the amount of time required before the read cycle will switch to the next operation. Timeout is configurable in 1 ms increments.

**Serial Cmd:** <**K260**,index,operation,frame count,**timeout**,database min,database max>

**Options:** 1 to 65535 (in 1 ms increments)

## **Database Range (Multi-Operation)**

When Multi-Operation is active, the Configuration Database cannot be disabled. The database range fields specify the start and end index range to be used for each operation.

### **Minimum**

**Definition:** Specifies the starting IP Database index to be used for processing during the specified operation.

**Serial Cmd:** <**K260**,index,operation,frame count,timeout,**database min**,database max>

**Options:** 1 to 10

### **Maximum**

**Definition:** Specifies the ending IP Database index to be used for processing during the specified operation. If this value is set to less than the minimum value, the minimum value will be used for both max and min.

**Serial Cmd:** <**K260**,index,operation,frame count,timeout,database min,**database max**>

**Options:** 1 to 10

# Tube/Cap Library

## Active Tube/Cap Library Indexes



Click the **EZ Match** button and then the **Library** tab to display the **Tube/Cap Library** view.

**Important:** The default Tube/Cap Library configuration shown below is only one example of how the database can be configured. The Tube/Cap Library database can be modified to fit your specific application.

Test | Multi-Operation | **Library** | Messages

**Tube/Cap Library**

Auto Sync Library  
Measurements are in mm

Index	Tube Diameter	Cap Tip Length	Cap Tip Diameter	Cap Base Length	Cap Base Diameter	Manufacturer Part Number
1	12.0	0.0	0.0	6.4	16.0	
2	12.5	0.0	0.0	13.7	17.0	
3	12.5	0.0	0.0	13.7	17.0	
4	15.3	15.6	9.0	9.0	18.0	
5	15.2	0.0	0.0	6.0	16.8	
6	15.2	0.0	0.0	6.5	16.8	
7	12.0	0.0	0.0	5.8	15.9	
8	12.5	15.8	8.5	9.0	15.7	
9	11.6	13.6	10.2	7.9	13.6	
10	11.6	15.7	8.5	7.8	13.4	
11	15.4	16.0	8.5	9.0	18.0	
12	11.5	15.6	8.5	7.9	13.4	
13	12.5	15.8	8.5	9.2	15.6	
14	15.3	15.7	8.5	9.1	17.9	
15	12.6	0.0	0.0	13.8	16.5	
16	12.1	0.0	0.0	19.5	15.9	
17	11.8	0.0	0.0	19.5	16.3	
18	12.2	0.0	0.0	19.5	16.3	
19	12.5	0.0	0.0	13.9	16.5	
20	12.2	0.0	0.0	19.5	16.0	
21	15.3	0.0	0.0	15.0	17.5	
22	15.2	0.0	0.0	19.7	17.5	
23	15.4	0.0	0.0	6.0	16.7	
24	0.0	0.0	0.0	0.0	0.0	
25	0.0	0.0	0.0	0.0	0.0	

Each active tube/cap library index is shown in the **Tube/Cap Library** view.

23 Number of Active Indexes Find...  Enable Find Filter Learn

Default
Receive
Send
Send and Save
Print Library...

## ***Active Tube/Cap Library Indexes by Serial Command***

*Definition:* Determines the number of active tube/cap library indexes that will be used during a tube/cap detection operation.

*Serial Cmd:* <**K257**,number of active indexes>

*Default:* **23**

*Options:* 1 to 100

# Tube/Cap Dimensions

Test | Multi-Operation | Library | Messages

**Tube/Cap Library**  Auto Sync Library  
Measurements are in mm

Index	Tube Diameter	Cap Tip Length	Cap Tip Diameter	Cap Base Length	Cap Base Diameter	Manufacturer Part Number
1	12.0	0.0	0.0	6.4	16.0	
2	12.5	0.0	0.0	13.7	17.0	
3	12.5	0.0	0.0	13.7	17.0	
4	15.3	15.6	9.0	9.0	18.0	
5	15.2	0.0	0.0	6.0	16.8	
6	15.2	0.0	0.0	6.5	16.8	
7	12.0	0.0	0.0	5.8	15.9	
8	12.5	15.8	8.5	9.0	15.7	
9	11.6	13.6	10.2	7.9	13.6	
10	11.6	15.7	8.5	7.8	13.4	
11	15.4					
12	11.5					
13	12.5					
14	15.3					
15	12.6					
16	12.1					
17	11.8					
18	12.2					
19	12.5					
20	12.2					
21	15.3					
22	15.2					
23	15.4					
24	0.0					
25	0.0					

23  Number  
Default

Double-click the desired index to bring up the **Edit Tube/Cap Dimensions** dialog.

**Edit Tube / Cap Dimensions** [X]

**Edit Tube / Cap 1**


Tube Diameter: 12 mm

Cap Tip Length: 0 mm

Cap Tip Diameter: 0 mm

Cap Base Length: 6.4 mm

Cap Base Diameter: 16 mm

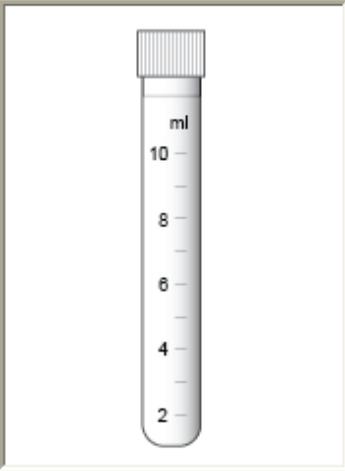

Manufacturer Part Number (up to 50 characters)

Revert Default Save Cancel

Edit tube or cap dimensions using the up and down arrows or typing dimension values directly in the text fields provided.

Click **Revert** to return to the previous settings for the selected index.  
Click **Default** to return to the default settings for the selected index.

The tube or cap manufacturer's part number can be added in the text field shown above.  
**Save** new tube or cap information to the selected index when you are finished.

## Tube/Cap Dimensions by Serial Command

### Index

*Definition:* Determines the index number where tube/cap information is to be stored in the tube/cap library.

*Serial Cmd:* <**K258**,*index*,*tube diameter*,*cap base length*,*cap tip length*,*cap base diameter*,*cap tip diameter*,*hue*,*saturation*,*value*>

*Options:* 1 to 100

### Tube Diameter




*Definition:* The diameter of the tube in which the cap is to be placed (millimeters/10).

*Serial Cmd:* <**K258**,*index*,**tube diameter**,*cap base length*,*cap tip length*,*cap base diameter*,*cap tip diameter*,*hue*,*saturation*,*value*>

*Options:* 0-32767 (mm/10)

## Cap Base Length

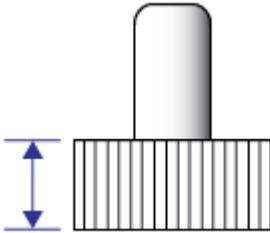


*Definition:* The length of the cap base (millimeters/10).

**Note:** If this value is **0**, it will be ignored.

*Serial Cmd:* <**K258**,index,tube diameter,**cap base length**,cap tip length,cap base diameter,cap tip diameter,hue,saturation,value>

*Options:* 0-32767 (mm/10)

## Cap Tip Length

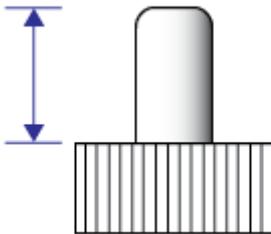


*Definition:* The length of the cap tip (millimeters/10).

**Note:** If this value is **0**, it will be ignored.

*Serial Cmd:* <**K258**,index,tube diameter,cap base length,**cap tip length**,cap base diameter,cap tip diameter,hue,saturation,value>

*Options:* 0-32767 (mm/10)

## Cap Base Diameter

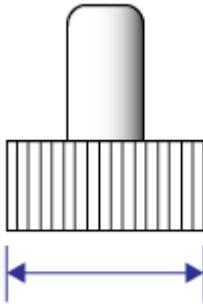


**Definition:** The diameter of the cap base (millimeters/10).

**Important:** This dimension should be measured at the bottom (where the cap is inserted in the tube), because some caps are tapered.

**Serial Cmd:** <K258,index,tube diameter,cap base length,cap tip length,**cap base diameter**,cap tip diameter,hue,saturation,value>

**Options:** 0-32767 (mm/10)

## Cap Tip Diameter

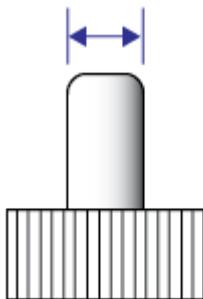

**Definition:** If the cap has a tip, this value represents the diameter of the tip in millimeters/10.

**Note:** If this value is **0**, it will be ignored.

**Serial Cmd:** <K258,index,tube diameter,cap base length,cap tip length,cap base diameter,**cap tip diameter**,hue,saturation,value>

**Options:** 0-32767 (mm/10)

## Hue (EZ Match Color Only)

*Definition:* Describes the color **type** (red, green, blue, etc.) and is expressed in degrees.

*Serial Cmd:* <K258,index,tube diameter,cap base length,cap tip length,cap base diameter,cap tip diameter,hue,saturation,value>

*Options:* 0-360°

## Saturation (EZ Match Color Only)

*Definition:* Describes the **vibrancy** of the color. The lower the saturation, the more “grayness” is present, causing the color to appear faded.

*Serial Cmd:* <K258,index,tube diameter,cap base length,cap tip length,cap base diameter,cap tip diameter,hue,saturation,value>

*Options:* 0-1000

## Value (EZ Match Color Only)

*Definition:* Describes the **brightness** of the color.

*Serial Cmd:* <K258,index,tube diameter,cap base length,cap tip length,cap base diameter,cap tip diameter,hue,saturation,value>

*Options:* 0-1000

## Tube/Cap Library Default Configuration

Library Index	Tube Diameter	Cap Base Length	Cap Tip Length	Cap Base Diameter	Cap Tip Diameter	Hue	Saturation	Value
1	120	64	0	160	0	9	555	423
2	125	137	0	170	0	5	661	474
3	125	137	0	170	0	4	327	466
4	153	90	156	180	90	356	462	568
5	152	60	0	168	0	10	554	490
6	152	65	0	168	0	10	551	419
7	120	58	0	159	0	9	525	462
8	125	90	158	157	85	292	263	505
9	116	79	136	136	102	356	470	533
10	116	78	157	134	85	235	232	556
11	154	90	160	180	85	25	406	588
12	115	79	156	134	85	150	213	568
13	125	92	158	156	85	240	37	623
14	153	91	157	179	85	152	194	623
15	126	138	0	165	0	5	629	529
16	121	195	0	159	0	5	589	592
17	118	195	0	163	0	265	156	400
18	122	195	0	163	0	10	551	498
19	125	139	0	165	0	6	387	486
20	122	195	0	160	0	9	543	403
21	153	150	0	175	0	5	618	513
22	152	197	0	175	0	315	335	505
23	154	60	0	167	0	10	450	392

**Important:** Hue, Saturation, and Value are available for EZ Match Color only.

# Tube/Cap Information



Click the **EZ Match** button and then the **Messages** tab to display the **Select Message** view.

**Note:** Default Tube/Cap Detection messages shown below.

**Note:** A read cycle or read operation will format the No Read, CA\_, and TA\_ messages in the following order of precedence:

**TA\_ (all), CA\_ (all), No Read (all)**

**Note:** The functions in the above view can also be set using the **<K850>** and **<K851>** serial commands.

## Tube/Cap Information by Serial Command

**Usage:** **Tube/Cap Information** is useful in more complex applications that require information about the spatial orientation of test tubes and cap characteristics in addition to presence/absence information.

**Definition:** In addition to Tube/Cap Message output, **Tube/Cap Information** settings can be configured to show a user-defined **Separator**, a detected tube or cap's specific **Tube/Cap Library Index**, a detected test tube's **Tube Angle**, and a detected test tube's **Tube/Cap Tip Position**.

**Serial Cmd:** `<K850,separator,tube/cap library index,tube angle,tube/cap tip position,cap color,match status,tube diameter>`

The following example shows a **Tube/Cap Information** output string:

001\_+001\_0001\_06.RED.05\_c001.d001\_0001\_CP

<b>Tube/Cap Library</b>	<b>Sep.</b>	<b>Tube Angle</b>	<b>Sep.</b>	<b>Tube/Cap Tip Pos.</b>	<b>Sep.</b>	<b>Cap Color</b>	<b>Sep.</b>	<b>Match Status</b>	<b>Sep.</b>	<b>Tube Dia.</b>	<b>Sep.</b>	<b>Tube/Cap Message</b>
3 digits	1 char.	(+/-) 3 digits	1 char.	4 digits	1 char.	mag. color category	1 char.	color.dim	1 char.	4 digits	1 char.	Up to 15 char.
"001"	"_"	"+001"	"_"	"0001"	"_"	06.RED.05	"_"	cxxx.dxxx	"_"	"0001"	"_"	"_CP"

### Separator

**Definition** Specifies the ASCII character used to separate tube/cap information.

**Note:** Entering **NUL (00 in hex)** disables separator.

**Serial Cmd:** `<K850,separator,tube/cap library index,tube angle,tube/cap tip position,cap color,match status,tube diameter>`

**Default:** **\_ (underscore)**

**Options:** Any ASCII character

### Tube/Cap Library Index

**Definition** When **Tube/Cap Library Index** is enabled, the three-digit tube/cap library index value will be appended to tube/cap detection output as a preamble.

**Serial Cmd:** `<K850,separator,tube/cap library index,tube angle,tube/cap tip position,cap color,match status,tube diameter>`

**Default:** **Disabled**

**Options:** **0 = Disabled**

1 = Enabled

**Notes:**

- This value is output in Read Rate when enabled. When enabled, the library index values are required to match in order to be part of the same output. For example, if a **Cap Present** that matches **Tube/Cap Library Index 1** is processed 80% of the time, and a **Cap Present** that matches **Tube/Cap Library Index 2** is processed 20% of the time, the output would be:

80% 001\_CP\_20% 002\_CP\_

- The **Tube/Cap Library Index** value is not required to match when requiring more than one tube/cap to qualify for an output.

## Tube Angle

**Definition** When **Tube Angle** is enabled, a polarity sign (+/-) and a three-digit value representing the angle of the tube in respect to the field of view will be appended to tube/cap detection output as a preamble.  
A + value indicates that the tube is angled away from the center and toward the bottom of the field of view, while a - indicates that the tube is angled away from the center and toward the top of the field of view.

**Serial Cmd:** <**K850**,separator,tube/cap library index,**tube angle**,tube/cap tip position,cap color,match status,tube diameter>

**Default:** **Disabled**

**Options:** **0 = Disabled**  
1 = Enabled

### Notes:

- This value is not output in Read Rate results.
- The **Tube Angle** value is not required to match when requiring more than one tube/cap to qualify for an output.

## Tube/Cap Tip Position

**Definition** When **Tube/Cap Tip Position** is enabled, a four-digit value will be appended to tube/cap detection output as a preamble.  
This value represents the distance on the X-axis from the left of the captured image to the tip of the tube or cap, in millimeters x10.  
*Example:* 0835 represents 83.5 mm.

**Serial Cmd:** <**K850**,separator,tube/cap library index,tube angle,**tube/cap tip position**,cap color,match status,tube diameter>

**Default:** **Disabled**

**Options:** **0 = Disabled**  
1 = Enabled

## Cap Color (EZ Match Color Only)

**Definition** This feature is only available for the color version of the EZ Match Imager.

**Serial Cmd:** <**K850**,separator,tube/cap library index,tube angle,tube/cap tip position,**cap color**,match status,tube diameter>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Color                      2 = HSV

## Color (Cap Color)

**Cap Color** is output in three parts (magnitude-color-category), separated by a “.” character.

### Notes:

- When **Cap Color** is enabled, it is output in read rate. The color output string is required to match to be part of the same output.

For example, a RED cap with two different **Category** values will be output as follows:

**80% 08.RED.12\_CP\_      20% 08.RED.11\_CP\_**

- If the cap is undetermined, the color of the cap may sometimes be undetermined as well. In such a case, a CNA (Color Not Available) message will supersede the color code.

The table below shows the available output options.

Magnitude	Color	Category			
		Color Match Resolution			
		C	H	HS	HSV
1-30	RED	0	0	1-6	1-30
1-30	ORANGE	0	0	1-6	1-30
1-30	YELLOW	0	0	1-6	1-30
1-30	Y_GRN	0	0	1-6	1-30
1-30	GREEN	0	0	1-6	1-30
1-30	B_GRN	0	0	1-6	1-30
1-30	CYAN	0	0	1-6	1-30
1-30	G_BLUE	0	0	1-6	1-30
1-30	BLUE	0	0	1-6	1-30
1-30	P_BLUE	0	0	1-6	1-30
1-30	MAGENTA	0	0	1-6	1-30
1-30	P_RED	0	0	1-6	1-30
0	WHITE	0			
0	BLACK	0			
0	GRAY	1-4			

### Magnitude

**Magnitude** is a value between **1** and **30** which defines the magnitude of the hue (further divides the (H)ue value to allow more resolution). This is useful in providing a distinction between different shades of a color.

For example, the color PINK will have a **Color** value of RED, but to define PINK further, you would look at the magnitude of the Hue to describe the shade of RED.

### Color

**Color** refers to the detected color of the cap.

### Category

**Category** further defines the color into categories based on saturation and brightness.

---

## Tube/Cap Information

### HSV (Cap Color)

When **HSV** is enabled, cap color values will be output in the following format:

(H)ue-(S)aturation-(V)alue

*Example:* 310-450-325

#### Notes:

- This value is not output in read rate.
- This value is not required to match when requiring more than one tube/cap to qualify for an output.

### Match Status (EZ Match Color Only)

*Definition* This feature is only available for the color version of the EZ Match Imager.

**Match Status** is output in the following format:

Format: **cxxx.dxxx** where “c” = cap color library match;

“d” = cap dimensions library match;

“xxx” = tube/cap library index

(When “xxx” = “000”, no match has occurred.)

While the cap library output mode will output the “best” match, the value output from this mode will offer the last matched cap library index for color and dimension. If both a color and dimension match has occurred, the last cap library index that both color and dimension matched will be output.

#### Notes:

- This value is not output in read rate.
- This value is not required to match when requiring more than one tube/cap to qualify for an output.

*Serial Cmd:* <**K850**,separator,tube/cap library index,tube angle,tube/cap tip position,cap color,**match status**,tube diameter>

*Default:* **Disabled**

*Options:* **0 = Disabled**

1 = Enabled

### Tube Diameter

*Definition* When **Tube Diameter** is enabled, a four-digit value will be appended to tube/cap detection output as a preamble.

This value represents the diameter of the tube in millimeters x10.

*Example:* 0835 represents 83.5 mm.

*Serial Cmd:* <**K850**,separator,tube/cap library index,tube angle,tube/cap tip position,cap color,**match status**,**tube diameter**>

*Default:* **Disabled**

*Options:* **0 = Disabled**

1 = Enabled

## Tube/Cap Message Formatting by Serial Command

### Cap Presence Message

*Definition:* Tube/Cap Detection message database index that will be used for a **Cap Present** condition.

*Serial Cmd:* <**K851**,*cap presence message index*,*cap absence message index*,*cap unknown message index*,*tube presence message index*,*tube absence message index*>

*Default:* **1**

*Options:* 1 to 10

### Cap Absence Message

*Definition:* Tube/Cap Detection message database index that will be used for a **Cap Absent** condition.

*Serial Cmd:* <**K851**,*cap presence message index*,**cap absence message index**,*cap unknown message index*,*tube presence message index*,*tube absence message index*>

*Default:* **2**

*Options:* 1 to 10

### Cap Unknown Message

*Definition:* Tube/Cap Detection message database index that will be used for a **Cap Unknown** condition.

*Serial Cmd:* <**K851**,*cap presence message index*,*cap absence message index*,**cap unknown message index**,*tube presence message index*,*tube absence message index*>

*Default:* **3**

*Options:* 1 to 10

### Tube Presence Message

*Definition:* Tube/Cap Detection message database index that will be used for a **Tube Present** condition.

*Serial Cmd:* <**K851**,*cap presence message index*,*cap absence message index*,*cap unknown message index*,**tube presence message index**,*tube absence message index*>

*Default:* **4**

*Options:* 1 to 10

## **Tube Absence Message**

*Definition:* Tube/Cap Detection message database index that will be used for a **Tube Absent** condition.

*Serial Cmd:* <**K851**,*cap presence message index, cap absence message index, cap unknown message index, tube presence message index, **tube absence message index***>

*Default:* **5**

*Options:* 1 to 10


## Tube/Cap Message Editing

All Tube/Cap Detection messages can be modified to meet the requirements of the specific application.

**Note:** Tube and cap detection messages can also be edited using the **<K852>** command.

Edit Messages



Click the **Edit Messages** button to bring up the following dialog:

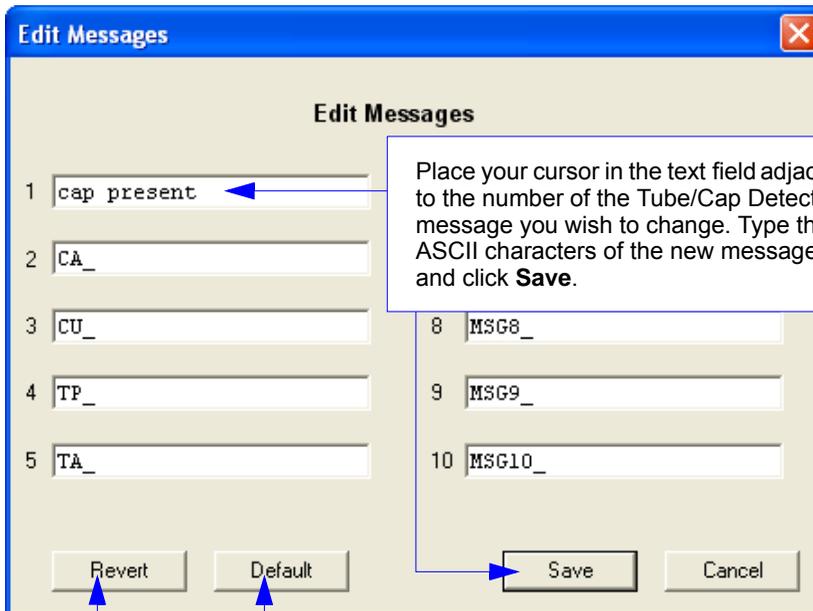

Click **Revert** to return to the most recent message settings. Click **Default** to return to the original default message settings.

The new message will appear on the corresponding dropdown menu in the **Messages** view.

**Hint:** To enter Control characters as Tube/Cap Detection messages, right-click in any of the text fields in the **Edit Messages** dialog and click on **Expand**. To return to ASCII characters, right-click again and click on **Contract**.

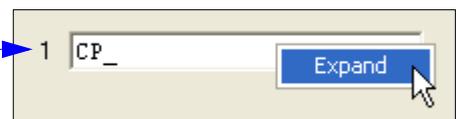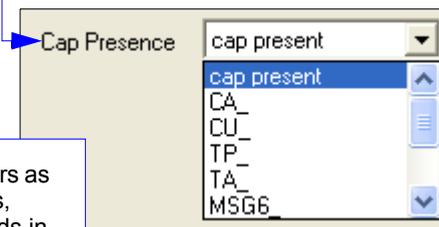

## Tube/Cap Message Editing by Serial Command

Default Tube/Cap Detection messages are shown in the table below.

All Tube/Cap Detection messages can be modified to meet the requirements of the specific application.

**Serial Cmd:** <K852,index,message>

**Options:** Any ASCII string up to 15 characters.

<b>Index</b>	<b>Messages</b>
1	CP_
2	CA_
3	CU_
4	TP_
5	TA_
6	MSG6_
7	MSG7_
8	MSG8_
9	MSG9_
10	MSG10_

**Note:** A read cycle or read operation will format the No Read, CA\_, and TA\_ messages in the following order of precedence:

**TA\_ (all), CA\_ (all), No Read (all)**

# 4 *Communications*

## **Contents**

Communications by ESP .....	4-2
Communications Serial Commands.....	4-3
Host Port Connections .....	4-4
Host Protocol .....	4-5
Poll Address.....	4-7
ACK/NAK Options.....	4-8
Polling Mode Options.....	4-9
RS-422 Status.....	4-10
Auxiliary Port Connections.....	4-11
Auxiliary Port System Data Status.....	4-19
Daisy Chain Autoconfigure .....	4-20
Response Timeout.....	4-21
LRC Status.....	4-22
Protocol Configuration Examples.....	4-23
USB HID Interface .....	4-24
ASCII Character Entry Modifier.....	4-33
Preamble.....	4-34
Postamble .....	4-35

This section tells how to set up communications parameters with the host and an auxiliary terminal.

With Microscan's **ESP** (Easy Setup Program), configuration changes can be made in the **ESP** menus and then sent and saved to your imager. The user can also send serial commands to the imager via **ESP's Terminal** window.

# Communications by ESP



Click the **Parameters** button and then the **Communication** tab.

Parameters	ESP Values
[-] Communications	
+ RS232/422 Host Port	
+ RS232 Auxilliary Port	
+ USB HID Report Status	
+ Preamble	Disabled
+ Postamble	Enabled
Response Timeout	12
LRC Status	Disabled
Aux Port System Data Status	Disabled*

The 'Aux Port System Data Status' row is highlighted in blue, and its dropdown menu is open, showing 'Disabled\*' (selected), 'Disabled\*', and 'Enabled'.

To open nested options, **single-click** the +.

To change a setting, **double-click** the setting and use your cursor to scroll through the options.

## Communications Serial Commands

Host Port Connections	< <b>K100</b> , <i>baud rate,parity,stop bits,data bits</i> >
Auxiliary Port Connections	< <b>K101</b> , <i>aux port mode,baud rate,parity,stop bits,data bits,daisy chain ID status,daisy chain ID</i> >
RS-422 Status	< <b>K102</b> , <i>status</i> >
Host Port Protocol	< <b>K140</b> , <i>protocol,address</i> >
Preamble	< <b>K141</b> , <i>status,preamble characters</i> >
Postamble	< <b>K142</b> , <i>status,postamble characters</i> >
Response Timeout	< <b>K143</b> , <i>response timeout</i> >
LRC	< <b>K145</b> , <i>status</i> >
Auxiliary Port System Data Status	< <b>K146</b> , <i>aux port system data status</i> >
ACK/NAK Options	< <b>K147</b> , <i>RES,REQ,STX,ETX,ACK,NAK</i> >
Polling Mode Options	< <b>K148</b> , <i>RES,REQ,STX,ETX,ACK,NAK</i> >
Autoconfiguration Daisy Chain	< <b>K150</b> <i>DAISY</i> >

# Host Port Connections

The host port can be configured with RS-232, RS-422, and RS-485 connections.

The following settings define the basic transmission speeds and digital standards that ensure common formatting.

## Baud Rate, Host Port

**Usage:** Can be used to transfer data faster or to match host port settings.

**Definition:** The rate at which the reader and host transfer data back and forth.

**Serial Cmd:** <K100,baud rate,parity,stop bits,data bits>

**Default:** 115.2K

**Options:**

0 = 600	1 = 1200	2 = 2400
3 = 4800	4 = 9600	5 = 19.2K
6 = 38.4K	7 = 57.6K	8 = 115.2K
9 = 230K		

## Parity, Host Port

**Usage:** Only changed if necessary to match host setting.

**Definition:** An error detection routine in which one data bit per character is set to 1 or 0 so that the total number of bits in the data field is either even or odd.

**Serial Cmd:** <K100,baud rate,parity,stop bits,data bits>

**Default:** None

**Options:** 0 = None 1 = Even 2 = Odd

## Stop Bits, Host Port

**Usage:** Only changed if necessary to match host setting.

**Definition:** One or two bits added to the end of each character to indicate the end of the character.

**Serial Cmd:** <K100,baud rate,parity,stop bits,data bits>

**Default:** One

**Options:** 0 = One 1 = Two

## Data Bits, Host Port

**Usage:** Only changed if necessary to match host setting.

**Definition:** One or two bits added to the end of each character to indicate the end of the character.

**Serial Cmd:** <K100,baud rate,parity,stop bits,data bits>

**Default:** Eight

**Options:** 0 = Seven 1 = Eight

**Note:** See [USB HID Interface](#) on page 4-24 for protocol information relating to USB.

# Host Protocol

- Usage:** In general, the point-to-point protocols will work well in most applications. They require no address and must use RS-232 or RS-422 communications standards.
- Definition:** Protocols define the sequence and format in which information is transferred between the reader and the host, or in the case of **Multidrop**, between the readers and a concentrator.
- Serial Cmd:** **<K140,protocol,address>**
- Default:** **Point-to-Point**
- Options:** **0 = Point-to-Point**  
 1 = Point-to-Point with RTS/CTS  
 2 = Point-to-Point with XON/XOFF  
 3 = Point-to-Point with RTS/CTS and XON/XOFF  
 4 = ACK/NAK  
 5 = Polling Mode

**Note:** In all protocol modes, the preamble **<K141>** and postamble **<K142>** character strings can be used to frame the decode data, and both are included in calculating the **LRC** (Longitudinal Redundancy Check).

## Point-to-Point (Standard)

- Usage:** *Used only with RS-232 or RS-422.*
- Definition:** Standard **Point-to-Point** requires no address and sends the data to the host whenever it is available, without a request or handshake from the host.
- Serial Cmd:** **<K140,0>**

## Point-to-Point with RTS/CTS

- Usage:** A reader initiates a data transfer with an RTS (request-to-send) transmission. The host, when ready, responds with a CTS (clear-to-send) and the data is transmitted. RTS and CTS signals are transmitted over two dedicated wires as defined in the RS-232 standard. *Used only with RS-232.*
- Definition:** **Point-to-Point with RTS/CTS** (request-to-send/clear-to-send) is a simple hardware handshake protocol that allows a reader to initiate data transfers to the host.
- Serial Cmd:** **<K140,1>**

## Point-to-Point with XON/XOFF

- Usage:** If an XOFF has been received from the host, data will not be sent to the host until the host sends an XON. During the XOFF phase, the host is free to carry on other chores and accept data from other devices. *Used only with RS-232.*
- Definition:** This option enables the host to send the XON and XOFF command as a single byte transmission command of start (^Q) or stop (^S).
- Serial Cmd:** **<K140,2>**

## **Point-to-Point with RTS/CTS and XON/XOFF**

*Usage:* Used only with RS-232.

*Definition:* This option is a combination of **Point-to-Point with RTS/CTS** and **Point-to-Point with XON/XOFF**.

*Serial Cmd:* <K140,3>

## **ACK/NAK**

*Definition:* See the **ACK / NAK Options** command <K147> on page 4-8.

*Serial Cmd:* <K140,4>

## **Polling Mode**

*Definition:* See the **Polling Mode Options** command <K148> on page 4-9.

*Serial Cmd:* <K140,5>

## Poll Address

*Serial Cmd:* <**K140**,protocol,**address**>

*Default:* **1**

*Options:* 1 to 50

1 = Poll address 0x1C, Select address 0x1D

2 = Poll address 0x1E, Select address 0x1F

...

50 = Poll address 0x7E, Select address 0x7F

**Note:** See [USB HID Interface](#) on page 4-24 for protocol information relating to USB.

## ACK / NAK Options

**Definition:** These parameters take effect for **ACK/NAK <K140,4>** on the main RS-232 or RS-422 ports (not on the Auxiliary Port), and are completely independent of the **Polling Mode Options <K148>**.

The imager always follows the protocol in both directions (to and from the host). There is no option to disable it from either direction.

**Serial Cmd:** <K147,RES,REQ,STX,ETX,ACK,NAK>

### RES-NAK Defaults

RES: (Reset)	00 (disabled)
REQ: (Request)	00 (disabled)
STX: (Start of Text)	00 (disabled)
ETX: (End of Text)	00 (disabled)
ACK: (Acknowledge)	06
NAK: (Negative Acknowledge)	15

The following are general outlines of the **ACK/NAK** protocol. Items that are framed by brackets ( [ ] ) can either be disabled or enabled. LRC does not include STX, but it does include preamble, postamble, and ETX.

### Symbol Data Output

**TX to host:** [STX] [preamble] SYMBOL DATA [postamble] [ETX] [LRC]

**Response from host:** ACK/NAK. Sent when LRC, ETX, postamble, or timeout (waiting for more data) are detected (if REQ is disabled) depending on what is enabled.

### Commands from Host to Imager

**TX to Imager:** [STX] <command> [ETX] [LRC]

**Response from Imager:** ACK/NAK. Sent when LRC, ETX, or command-ending angle bracket '>' are received, depending on what is enabled.

### Command Response from Imager to Host

**TX to host:** [STX] [preamble] COMMAND RESPONSE DATA [postamble] [ETX] [LRC]

**Response from host:** ACK/NAK. Sent when LRC, ETX, postamble, command-ending angle bracket '>', or timeout (waiting for more data) are detected, depending on what is enabled.

As with **Polling Mode <K140,5>**, the imager can optionally perform the REQ and RES event sequences in ACK/NAK mode. If the sender does not receive an ACK or NAK, it will send REQ to request such a response (if enabled). When the sender receives an ACK, too many NAKs, or times out (if already enabled), it will send a RES (if enabled) to terminate the transaction.

**Note:** See [ACK / NAK Data Flow Examples](#) in Appendix D for sample ACK/NAK communication scenarios.

**Note:** See [USB HID Interface](#) on page 4-24 for protocol information relating to USB.

## Polling Mode Options

**Definition:** These parameters only take effect for **Polling Mode <K140,5>** on the main RS-232 or RS-422 ports (not on the Auxiliary Port), and are completely independent of the **ACK/NAK Options <K147>**.

The values of protocol characters can be changed, but the protocol events cannot be disabled. The polling mode address is configured in the **<K140>** command (see **Poll Address** on page 4-7).

To enable true multidrop protocol, the RS422/485 port must be enabled, **<K102,1>**, in order to turn the transmitter on and off. If RS-232 is enabled instead of RS422/485, **<K102,0>**, then **Polling Mode** will operate as a **Point-to-Point** polling protocol. This is because the RS-232 transmitter is always left on when enabled.

**Serial Cmd:** **<K148,RES,REQ,STX,ETX,ACK,NAK>**

### RES-NAK Defaults

<i>RES: (Reset)</i>	04
<i>REQ: (Request)</i>	05
<i>STX: (Start of Text)</i>	02
<i>ETX: (End of Text)</i>	03
<i>ACK: (Acknowledge)</i>	06
<i>NAK: (Negative Acknowledge)</i>	15

**Note:** See **Polling Mode Data Flow Examples** in Appendix D for sample **Polling Mode** communication scenarios.

**Note:** See **USB HID Interface** on page 4-24 for protocol information relating to USB.

## RS-422 Status

*Usage:* RS-232 is an industry standard. RS-422 is used when greater cable lengths are required and/or where noise interference is an issue.

*Definition:* RS-422, if enabled, allows communication through RS-422 I/O lines.  
When RS-422 is enabled, RS-232 is disabled.  
When RS-422 is disabled, RS-232 is enabled.

*Serial Cmd:* **<K102,status>**

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

**Note:** The default setting can only be changed in readers with multiplexed RS-232 / RS-422 ports. It is forced to **1** (enabled) in readers with “dedicated” RS-422 ports.

## Auxiliary Port Connections

The auxiliary port offers an alternative port that can be configured to communicate by RS-232 in several modes, including daisy chain.

As with the host port parameters, the auxiliary port settings (baud rate, parity, stop bits, and data bits) must be identical with those of the auxiliary device.

**Usage:** An auxiliary port connects the imager to a remote display or to other readers that can display or transfer data.

**Definition:** These commands set the communication parameters with the auxiliary port, which can be used to configure menus, send data to the host, display data transmissions originating from the host, and relay data from other imagers set in tandem (daisy chained).

### Auxiliary Port Mode

**Usage:** Can be used to transfer data faster or to match an auxiliary device.

**Definition:** Determines the flow of data between the auxiliary port device(s), the imager, and the host.

**Serial Cmd:** <**K101,aux port mode**,baud rate,parity,stop bits,data bits,daisy chain i.d. status, daisy chain i.d.>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Transparent                      2 = Half duplex  
3 = Full duplex                      4 = Daisy chain                      5 = Command Processing

### Baud Rate, Auxiliary Port

**Usage:** Can be used to transfer data faster or to match an auxiliary device.

**Definition:** The rate at which the imager and host transfer data back and forth.

**Serial Cmd:** <**K101,aux port mode**,**baud rate**,parity,stop bits,data bits,daisy chain i.d. status,daisy chain i.d.>

**Default:** **115.2K**

**Options:** 0 = 600                      1 = 1200                      2 = 2400  
3 = 4800                      4 = 9600                      5 = 19.2K  
6 = 38.4K                      7 = 57.6K                      **8 = 115.2K**  
9 = 230K




## Transparent Mode

**Usage:** A common application, in conjunction with handheld imagers, is one that employs an auxiliary readout to detect misapplied symbols.


**Definition:** In **Transparent Mode**, data is passed between the auxiliary port and the host. The imager buffers data from the auxiliary port and echoes the keyed data on the auxiliary port.

- Auxiliary port data is passed through to the host whenever a return key is pressed at the auxiliary port or whenever symbol data is sent. If sent with symbol data, it is processed on a first-in/first-out basis.
- Auxiliary port data to the host is always sent with a preamble and postamble.
- If the imager is in a polling mode with the host, auxiliary port data will still pass through.

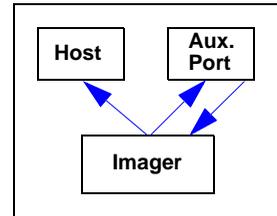


### Data Originating from the Imager

- Transmission to the auxiliary port occurs immediately upon a Good Read.
- Data sent to the auxiliary port does not include a preamble or a postamble.
- Communications with the auxiliary port is always in Point-to-Point protocol, even if the host is in a polled protocol mode.

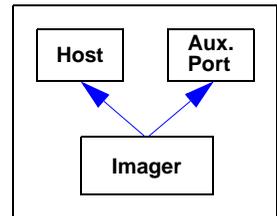

### Data Originating from the Host

- All host data is echoed to the auxiliary port in unpolled mode.

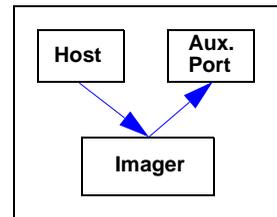

**Serial Cmd:** `<K101,aux port mode,baud rate,parity,stop bits,data bits,daisy chain i.d. status,daisy chain i.d.>`

**Options:** **1 = Transparent**


## Half Duplex Mode

**Usage:** Useful when the user wants symbol data displayed on an auxiliary menu close to the imager.

**Definition:** In **Half Duplex Mode** all auxiliary port data and symbol data is sent directly to the host. Symbol data is displayed on the auxiliary port menu at the same time the data is sent to the host.


### Data Originating from the Auxiliary Port

- Auxiliary port data to the host is ignored if the imager is in a polled mode.
- Auxiliary port data or read data is sent to the host whenever it is received.
- Auxiliary port data is not echoed.
- Auxiliary port data to the host is always sent without a preamble or postamble.

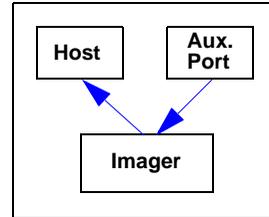


### Data Originating from the Imager

- Data is transmitted to the auxiliary port at the same time it is transmitted to the host.
- Data transmission conforms with all parameters specified in the configuration menu (e.g. Preamble, Postamble, End of Read Cycle).

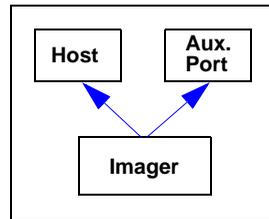

### Data Originating from the Host

- All host data is echoed to the auxiliary port in unpolled mode.

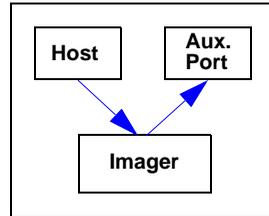

**Serial Cmd.** **<K101,aux port mode,baud rate,parity,stop bits,data bits,daisy chain i.d. status,daisy chain i.d.>**

**Options:** **2 = Half Duplex**


## Full Duplex Mode

**Usage:** When communication to and from the auxiliary port is required.

**Definition:** In **Full Duplex Mode** all auxiliary port data and symbol data is sent directly to the host. Symbol data is not displayed on the auxiliary port menu.


### Data Originating from the Auxiliary Port

- Auxiliary port data to the host is ignored if the imager is in a polled mode.
- Auxiliary port data or read data is sent to the host whenever it is received.
- Auxiliary port data is not echoed.
- Auxiliary port data to the host is always sent without a preamble or postamble.

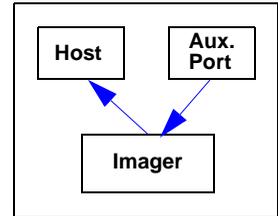


### Data Originating from the Imager

- Data is not sent to the auxiliary port.

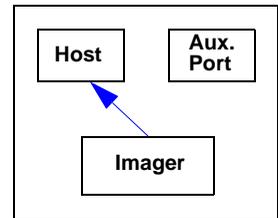

### Data Originating from the Host

- All host data is echoed to the auxiliary port in unpolled mode.

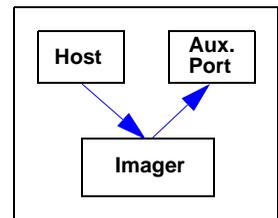

**Serial Cmd:** <**K101,aux port mode**,baud rate,parity,stop bits,data bits,daisy chain i.d. status,daisy chain i.d.>

**Options:** **3 = Full Duplex**

## Daisy Chain Mode

**Usage:** Useful in applications where:

- More than one symbol type is present.
- A symbol may be present on multiple sides of a package.
- Symbols are presented at different depths.

**Definition:** In a daisy chain application, readers are connected in tandem or a “daisy chain” and decoded data is relayed from one reader to another until the data reaches the host.

A primary reader has its host port linked to the host computer and its auxiliary port linked to the host port of the first *secondary* reader in the chain. Thereafter, each secondary reader’s auxiliary port is linked to the host port of the secondary reader that is farther from the host in the daisy chain. Each reader in the chain can be assigned an ID that accompanies any data that it sends.

**Serial Cmd:** *<K101,aux port mode,baud rate,parity,stop bits,data bits,daisy chain i.d. status,daisy chain i.d.>*

**Options:** **4 = Daisy Chain**

**Function:** Before the primary reader times out, it checks its auxiliary port for data. It should be set to wait at least 30 ms for each secondary reader in the daisy chain. If no data is received within the read cycle timeout, the primary reader sends a No Read message to the host. Otherwise the complete data is sent.

If, for example, the primary reader is set to timeout in 120 ms, the first secondary reader reader downstream might be set to 90 ms, the next to 30 ms, and so forth, thus assuring that at least 30 ms elapses between transmissions.<sup>a</sup>

Daisy-chained readers can send a series of symbols by enabling **Multisymbol** and a common multisymbol separator. If the primary reader does not receive the expected number of symbols, No Read messages are appended to the data string to make up the difference between the number of symbols enabled in **Multisymbol** and the number of symbols read.

For example, a primary and two secondary readers have **Number of Symbols** set to 3 and **Multisymbol Separator** defined as %. If the primary and the first secondary reader do not find symbols, but the next secondary reader registers a Good Read, the transmitted results would be:

symbol data % No Read % No Read

a. The above example assumes a best-case scenario. Other factors, such as baud rate, number of characters in a given symbol, and the number of secondary readers in the daisy chain can affect timing and may need to be included in your calculations for complete accuracy.

## Command Processing Mode

*Usage:* Allows a user to send configuration settings from the host port to the auxiliary port.

*Definition:* When enabled, **Command Processing Mode** allows commands to be entered via the auxiliary port and direct externally triggered read cycle data in one of two ways:

- Symbol data, including the serial trigger (if used), will be transmitted to the last port from which a command was sent.
- If the last command came from the host port, then externally triggered read cycle data will only be output to the host port.

*Serial Cmd:* <**K101,aux port mode**,baud rate,parity,stop bits,data bits,daisy chain i.d. status,daisy chain i.d.>

*Options:* **5 = Command Processing**

---

## Daisy Chain ID Status

*Usage:* Used in a daisy chain setup in cases where the host needs to know which reader in the chain sent the data.

*Definition:* Each reader in a daisy chain can be assigned a one or two character ID that will appear in front of decoded data and identify its source.

*Serial Cmd:* <K101,aux port mode,baud rate,parity,stop bits,data bits,daisy chain i.d.status, daisy chain i.d.>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

**Note:** Enable/disable and length must be the same in all readers.

## Daisy Chain ID

*Usage:* Used in a daisy chain setup in cases where the host needs to know which reader in the chain sent the data.

*Definition:* A one or two character prefix which identifies the particular daisy chain reader from which the data is being sent to the host.

*Serial Cmd:* <K101,aux port mode,baud rate,parity,stop bits,data bits,daisy chain i.d.status,daisy chain i.d.>

*Default:* **1/**

*Options:* Any one or two ASCII characters.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K101h,,,,,,3C>

For >: <K101h,,,,,,3E>

For , : <K101h,,,,,,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Auxiliary Port System Data Status

*Definition:* When enabled, system data will be routed to the Auxiliary Port. This includes decoded data and diagnostic warning messages.

When disabled, system data will not be routed to the Auxiliary Port.

*Serial Cmd:* <**K146,aux port system data status**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

# Daisy Chain Autoconfigure

**Usage:** For quick setup and configuration of your daisy chain network.

**Definition:** The command to autoconfigure the daisy chain is sent to the primary imager and the software responds in the following ways:

- Counts the number of secondary readers in the daisy chain.
- Assigns an internal ID number (1...n) to each secondary reader, where the first secondary reader is number 1 (the primary reader's ID being a 0).
- Propagates the communications settings and the relevant operating modes of the primary imager to the host and auxiliary ports of each secondary reader.
- Resets each secondary reader.
- Confirms that each secondary reader has acquired the new settings.

**Serial Cmd:** <**K150DAISY**>


**Note:** All secondary readers must be set to **Serial** for **Daisy Chain** to function.

When setting up a daisy chain operation, perform the following steps:

1. Set the primary imager (the one connected to the host) to **Serial**.

This sets all the imagers in the chain to **Serial** when the command is executed.

Before **Autoconfigure** you must set the primary imager to **Serial (S)**:



2. Send <**K150DAISY**>.
3. If necessary, set the primary imager to **Edge**.

After **Autoconfigure** you may set the primary imager to **Edge (S)**, but the other imagers must remain in **Serial (S)**:



---

## Response Timeout

- Usage:* Only used when a response is required from the host. While in **Multidrop**, if the imager does not receive an **ACK** or **NAK** from the host after sending polled data, it will act on a fault. The reader can be set to wait indefinitely by setting **Response Timeout** to zero.
- Definition:* The time that the imager will wait before timing out if **ACK**, **NAK**, and **ETX** are enabled, and a host response is expected.
- Serial Cmd:* **<K143,response timeout>**
- Default:* **12** (in 1ms increments)
- Options:* 0 to 255 (A zero (0) setting causes an indefinite wait.)

**Note:** See [USB HID Interface](#) on page 4-24 for protocol information relating to USB.

# LRC Status

## *(Longitudinal Redundancy Check)*

*Usage:* Used when extra data integrity is required.

*Definition:* An error-checking routine that verifies the accuracy of transmissions. It is the exclusive OR of all characters following the **STX** (start of text) up to and including the **ETX** (end of text). What this means is that the binary representation of all the characters in a transmission are cumulatively added in a column and each resulting odd integer is assigned a 1 and each even integer a 0 (two 1s = 0, two 0s = 0, a 1 and a 0 = 1). The extra LRC character is then appended to the transmission, and the receiver (usually the host) performs the same addition and compares the results.

*Serial Cmd:* **<K145,status>**

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

# Protocol Configuration Examples

## *Point-to-Point (Main Port)*

- <K100,8,0,1,1>** Baud Rate: **115.2K**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**
- <K140,0>** Point-to-Point
- <K102,0>** RS-232 enabled; **<K102,1>** = RS-422 enabled

## *Polling Mode (Main Port)*

- <K100,4,0,1,1>** Baud Rate: **9600**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**
- <K140,5,23>** Polling Mode; Address: **23**
- <K102,0>** RS-232 Point-to-Point polling; **<K102,1>** = RS-422/RS-485 true multidrop (switched transmitter)
- <K143,30>** 30 ms Response Timeout

## *“User-Defined” Polling Mode (Main Port)*

- <K100,4,0,1,1>** Baud Rate: **9600**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**
- <K140,5,12>** Polling Mode; Address: **12**
- <K148,,08,09,18,0B,0C,0D>** Default RES (0x04), REQ=0x08; EOT=0x09; STX=0x18; ETX=0x0B; ACK=0x0C; NAK=0x0D
- <K102,0>** RS-232 Point-to-Point polling; **<K102,1>** = RS-485 (true multidrop with switched transmitter)
- <K143,40>** 40 ms Response Timeout

## *ACK / NAK (Main Port)*

- <K100,9,0,1,1>** Baud Rate: **230K**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**
- <K140,4>** ACK/NAK
- <K147,,,01,1B,2E,1F>** Default RES and REQ (00, disabled); STX=0x01; ETX=0x1B; ACK=0x2E; NAK=0x1F
- <K102,1>** RS-422 enabled; **<K102,0>** = RS-232 enabled
- <K143,50>** 50 ms Response Timeout

## *Auxiliary Port*

Listed below are several examples of Auxiliary Port commands.

- <K101,2,4,0,1,1>** Half Duplex; Baud Rate: **9600**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**
- <K101,1,5,0,1,1>** Transparent; Baud Rate: **19.2K**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**
- <K101,3,7,0,1,1>** Full Duplex; Baud Rate: **57.6K**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**
- <K101,5,6,0,1,1>** Command Processing; Baud Rate: **230K**; Parity: **None**; Stop Bits: **2**; Data Bits: **8**

## USB HID Interface

The USB version of the EZ Match Imager operates as an HID (Human Interface Device) on the USB bus. HID-class devices communicate via “report” packets. An HID may support multiple report types, each of which is identified with a unique report ID. The EZ Match supports two different report types:

- **Microscan HID Report** (ID = 1)
- **Keyboard Report** (ID = 2)

The imager always outputs the same data for both report types. The user may enable or disable either report type.

Regardless of the report type used by the host application, the application protocol via USB is identical to RS-232 / RS-422 ports. **HID Reports** are used as a channel for standard Microscan imager communication, command input, and symbol data output.

**Important:** No matter how the imager is configured, it is always able to receive and respond to commands from the host application using **Microscan HID Reports**.

## Report Options

The following functionality conditions hold true regardless of how **HID Reports** are configured:

1. The host application must establish a connection with the imager to receive **Microscan HID IN Reports** (symbol data) and to send **Microscan HID OUT Reports** (commands, serial triggers).
2. The imager can always receive **Microscan HID OUT Reports** (commands, serial triggers).
3. The host application can always send commands through **Microscan HID OUT Reports**. If the command requires a response (a part number, for example), the imager will always send the response through **Microscan HID IN Reports**.
4. The imager always ignores **Keyboard OUT Reports** sent by the host operating system.
5. The content of both the **Keyboard Reports** and **Microscan HID IN Reports** is identical, except for **Keyboard Reports** non-printable data limitations.

### Microscan HID IN Reports

**HID Reports** are used as a channel for standard Microscan imager communication, command input, and symbol data output. There are two types of **Microscan HID Reports**:

#### Report Type

Microscan HID IN (imager to host)  
Microscan HID OUT (host to imager)

#### Data Content

Symbol data; No Reads; Service messages  
Commands; serial triggers

**Note:** The imager is always able to receive commands and serial triggers from the host through **Microscan HID OUT Reports**, regardless of the **Microscan HID IN Report** status. If the imager receives a command that requests a response, such as a part number query, the imager will send a **Microscan HID IN Report** regardless of the **IN Report** status.

*Serial Cmd:* <**K149, Microscan HID IN Report status, Keyboard IN Report status**>

*Default:* **1**

*Options:* 0 = Disabled **1 = Enabled**

### Microscan HID IN Reports Enabled

When this feature is enabled, the imager will send **Microscan HID IN Reports** to the host, containing data originated by the imager.

### Microscan HID IN Reports Disabled

When this feature is disabled, the imager will *not* send **Microscan HID IN Reports** to the host, containing data originated by the imager.

## Keyboard IN Reports

The host operating system will interpret **Keyboard IN Reports** from the imager as if the user were typing keyboard text. The host operating system sends keystrokes to the current application. This is commonly called a **Keyboard Wedge** configuration.

There is one type of **Keyboard Report** used:

<b>Report Type</b>	<b>Data Content</b>
Keyboard IN (imager to host)	Symbol data; No Reads; Service messages

**Note:** If **Keyboard IN Reports** is enabled, and **Microscan HID IN Reports** is disabled, the read cycle must be **Continuous Read 1 Output**, because there will be no **External Trigger** or **Serial Trigger**. It is not possible to send commands to the imager as **Keyboard OUT Reports**. To send commands to the imager via USB, the host application must establish a connection with the imager and send **Microscan HID OUT Reports**.

*Serial Cmd:* <K149, Microscan HID IN Report status, **Keyboard IN Report status**>

*Default:*       **0**

*Options:*       **0 = Disabled**                   1 = Enabled

### **Keyboard IN Reports Enabled**

When this feature is enabled, the imager *will* send **Keyboard IN Reports** to the host, containing data originated by the imager.

### **Keyboard IN Reports Disabled**

When this feature is disabled, the imager will *not* send **Keyboard IN Reports** to the host, containing data originated by the imager.

## **Microscan HID Report Format**

**Size:** 64 bytes, fixed-length. The **USB HID** standard defines all reports as being fixed-length.

**Structure:** **REPORT ID (1) LENGTH (1) DATA (62)**

Values in parentheses indicate the size, in bytes, of the field.

### **Field Descriptions**

#### **REPORT ID**

**Size:** 1 byte

**Value:** 0x01

**Note:** **Report ID** is the method employed by **USB HID** to allow multiple report formats to be sent and received from the same interface.

#### **LENGTH**

**Size:** 1 byte

**Value:** 0-62

**Note:** **Length** indicates the number of valid data bytes in the fixed-length data field. This is necessary because the **USB HID** standards define **HID Reports** as fixed-length, yet the imager or host may require a smaller data size in any given report.

#### **DATA**

**Size:** 62 bytes, fixed-length

**Value:** 0x00 to 0xFF

**Note:** The **Data** field is left-justified, meaning it begins immediately after the **Length** field. All unused data space is **NUL (00** in hex) padded. Data values can be “binary”, meaning that they span the entire 8 bit range of 0x00 to 0xFF.

### **Report Format Examples**

For clarity, all report format examples are shown as follows: report fields separated by an underscore ( \_ ), REPORT ID and LENGTH fields shown as decimal values, data fields shown as printable ASCII characters, and the number of NUL padding bytes shown as decimal values (nn).

#### **IN report (to host)**

1\_11\_A]002374938 (51)

REPORT ID = 1 = Microscan HID

LENGTH = 11

DATA = "A]02374938" = This is a Code 39 symbol.

NUL padding = 51 bytes

#### **OUT report (from host to imager)**

1\_27\_<K200,3><K220,0,300><K714?> (35)

REPORT ID = 1 = Microscan HID

LENGTH = 27

DATA = "<K200,3><K220,0,300><K714?>" = These commands enable External Edge, set a 3 second timeout, and request the No Read configuration command.

NUL padding = 35 bytes

#### **IN report (to host)**

1\_62\_<K714,1, A LONG MESSAGE STREAMED OVER MULTIPLE MICROSCAN HID RE (0)

REPORT ID = 1 = Microscan HID

LENGTH = 62

DATA = "<K714,1, A LONG MESSAGE STREAMED OVER MULTIPLE MICROSCAN HID RE" = This shows the response to the <714?> command. Note that the command status response is not yet complete. See the next report example for the complete response.

NUL padding = 0 bytes

#### **IN report (to host)**

1\_6\_PORTS>(56)

REPORT ID = 1 = Microscan HID

LENGTH = 6

DATA = "PORTS>" = This is the end of the response to the <K714?> command from the previous example.

The entire <K714> command response is as follows:

DATA = "K714,1, A LONG MESSAGE STREAMED OVER MULTIPLE MICROSCAN HID REPORTS>" .

NUL padding = 56 bytes

## Keyboard Report Format

*Size:* 9 bytes, fixed-length.

*Structure:* **REPORT ID (1) MODIFIER (1) RESERVED (1) KEYCODES (6)**

Values in parentheses indicate the size, in bytes, of the field.

**Important:** The host application does not need to understand and process **Keyboard Reports**. This task belongs to the host operating system. Keycodes are passed to the host application as if a user were typing keyboard text. The host application must be the active application in order to receive keystrokes.

Keyboard Reports protocol requires that two reports be sent for every keystroke. The first report indicates which key is pressed. The second report indicates “no key pressed”, with all keycodes **NUL (00 in hex)** to indicate that all keys have been released. In the case of the EZ Match, each byte output is equivalent to a keystroke, with a “key pressed” report and a “no key pressed” report. For this reason, data rates are much slower when using **Keyboard Reports**.

### Field Descriptions

#### REPORT ID

*Size:* 1 byte

*Value:* 0x02

**Note:** **Report ID** is the method employed by **USB HID** to allow multiple report formats to be sent and received from the same interface.

#### MODIFIER

*Size:* 1 byte

*Value:* 0x00 to 0xFF

**Note:** **Modifier** is an 8 bit field, corresponding to the state of the modifier keys at the time the keycode field was generated.

<i>Bit</i>	<i>Key</i>
0	LEFT CTRL
1	LEFT SHIFT
2	LEFT ALT
3	LEFT GUI
4	RIGHT CTRL
5	RIGHT SHIFT
6	RIGHT ALT
7	RIGHT GUI

### **Field Descriptions**

#### **RESERVED**

Size: 1 byte

Value: 0x00

**Note:** This field is **Reserved**. Its value is always **NUL (00** in hex).

#### **KEYCODES**

Size: 6 bytes

Value: 0x00 to 0xFF

**Note:** The EZ Match translates 8 bit data values into **Keycode** data in the following ways:

<b>8 Bit Data Value</b>	<b>Keycode Data</b>
0x00 to 0x1F and 0x7F to 0xFF	Decimal key ( . ) unless otherwise noted.
CR, 0x0D	<b>Enter</b> key
TAB, 0x09	<b>Tab</b> key
ESC, 0x1B	<b>ESC</b> key
"Printable" characters, 0x20 to 0x7E	These all translate to the keystrokes that produce them. This includes a-z, 0-9, punctuation, and SHIFT in the <b>Modifier</b> field, when necessary. Only the first <b>Keycode</b> in the 6 byte array will be populated.

## **USB HID Configuration Options**

The user has the following options for configuring and defaulting a USB version of the EZ Match Imager:

### **Configuration Symbols (Data Matrix with “Configure Reader” Flag)**

Symbol configuration can be performed “out-of-the-box”, as the EZ Match is configured for **Continuous Read Mode**, and Data Matrix is enabled by default. Data Matrix symbols are used to encode configuration commands when the symbology’s “configure reader” flag is set.

If the read cycle is changed, or if Data Matrix is disabled, another configuration/default method must be used. This is because the USB EZ Match has no external trigger, unless the user has configured the EZ Button as a trigger.

### **EZ Button Configuration**

By default, basic calibration can be initiated from the EZ Button (3 beeps). Note that this only changes the camera, image processing, and symbology settings of the imager. To default the USB EZ Match, hold down the EZ Button during power-on.

**Note:** This only overwrites Power-On settings with Custom Default settings, as when the **<Zrc>** command is received. It does *not* overwrite Power-On settings with Factory Defaults, as when the **<Zrd>** command is received. If Custom Defaults are misconfigured, another method must be used to default the imager.

### **Implementing the Host Operating System API and Establishing a Connection with the Microscan HID Interface**

When a connection is made, the host can send serial configuration/default commands. The imager will always be able to receive configuration commands from the host application and send responses to those commands. However, the imager can be configured to stop producing IN Reports to the host from symbol data output and diagnostics (service messages).

## Configuration Exceptions for USB

### Read Cycle Mode

By default, the imager operates in **Continuous Read Mode**. *If the imager is configured using Data Matrix symbols, the read cycle mode should be the last item changed before saving the configuration settings and beginning operation.* This is because all read cycle modes other than **Continuous Read Mode** require a trigger event. In USB, a trigger event can only be initiated by serial command. To send a trigger command the imager, the host application must establish a connection with the imager's **Microscan HID** interface and send the trigger command in a **Microscan HID Report**.

**The following read cycle conditions are required for the USB EZ Match:**

Serial Cmd: **<K200,read mode>**

Default: **Continuous**

Options: **0 = Continuous Mode**    1 = Continuous Read 1 Output Mode  
          2 = Level Mode            3 = Edge Mode  
          4 = Serial Mode         5 = Serial and Edge Mode

#### Important:

- To use **Level Mode**, you must enable **Undelimited Start Trigger Character <K229>** and **Undelimited End Trigger Character <K230>**.
- To use **Edge Mode**, you must enable and use the **Undelimited Start Trigger Character <K229>**.
- To use **Serial Mode**, you must use the **Delimited Trigger** defined by **<K201>**, or enable and use the **Undelimited Start Trigger Character <K229>**.
- To use **Serial and Edge Mode**, you must use the **Delimited Trigger** defined by **<K201>**, or enable and use the **Undelimited Start Trigger Character <K229>**.

### Communications

For the USB version of the EZ Match, no communications serial commands have any effect on the imager except the following:

- USB HID Report Status **<K149>**
- Preamble **<K141>**
- Postamble **<K142>**

### EZ Button

Default on power-on cannot be disabled **<K770,,default> = <K770,,1>**. This ensures a level of safety for recovering from misconfigured Power-On settings **<Z>**. However, it is not foolproof, as defaulting with the EZ Button only recovers Custom Default settings, which can be misconfigured themselves. For this reason, *do not save to Custom Default settings <Zc> until the imager's configuration has been tested.*

### Symbologies

If the imager is going to be configured with Data Matrix symbols, do not disable Data Matrix **<K479>**. Disabling Data Matrix will prevent the imager from reading configuration symbols.

# ASCII Character Entry Modifier

Commands that require ASCII text fields, such as **Preamble** and **Postamble** commands, can be sent to the imager as hex pairs (see Appendix E, [ASCII Table](#), for conversions).

*Serial Cmd Format:* <**Knnnh,00-FF**>

To enter ASCII fields as hex values (00 to FF), add a lower-case **h** directly after the command's **K** number, and then enter the hex value that corresponds with the desired ASCII character.

*Example:*

Consider the **Postamble** command:

*Serial Cmd:* <**K142,status,postamble character(s)**>

Imagine that your application requires the ASCII character **>** to be the postamble in your symbol decode output.

The ASCII characters **<**, **>**, and **,** can only be entered as hex pairs. So, to make **>** the postamble in your symbol decode output, enter the **Postamble** command as follows:

<**K142h,,3E**>

Note that the “status” field contains only a **,**. This is because the only field that is being changed is the “postamble character(s)” field. (See [Serial Configuration Command Conventions](#) on page A-13 for a more detailed explanation of this command shortcut.)

# Preamble

## Preamble Status

**Usage:** Useful for identifying and controlling incoming data. For example, defining the preamble as a carriage return and a line feed causes each decoded message to be displayed on its own line.

**Definition:** Defines a one to four character data string that can be added to the front of the decoded data.

**Serial Cmd:** <K141,status,preamble character(s)>

**Default:** Disabled

**Options:** 0 = Disabled                      1 = Enabled (within any protocol)

## Preamble Characters

**Serial Cmd:** <K141,status,preamble character(s)>

**Default:** ^M corresponds to: carriage return.

**Options:** To enter control characters within a serial command, hold down the **Ctrl** key while typing the desired character.

*Example:* <K141,1,CNTL-m> to enter the control character ^M.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K141h,,3C>

For >: <K141h,,3E>

For , : <K141h,,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

# Postamble

## Postamble Status

**Usage:** Useful for identifying and controlling incoming data. For example, defining the postamble as a carriage return and a line feed causes each decoded message to be displayed on its own line.

**Definition:** Allows the user to enable or disable up to four postamble characters that can be added to the end of the decoded data.

**Serial Cmd:** <K142,status,postamble character(s)>

**Default:** **Enabled**

**Options:** 0 = Disabled                      1 = Enabled (within any protocol)

## Postamble Characters

**Serial Cmd:** <K142,status,postamble character(s)>

**Default:** ^M^J corresponds to: carriage return/line feed.

**Options:** To enter control characters within a serial command, hold down the control key while typing the desired character.

*Example:* <K142,1,CNTL-m CNTL-j> to enter ^M^J.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K142h,,3C>

For >: <K142h,,3E>

For , : <K142h,,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

---

*Postamble*



# 5 Calibration

## Contents

Calibration Serial Commands .....	5-2
Calibration Overview .....	5-2
Calibration Options .....	5-3
Calibration by ESP .....	5-10
Initiating Calibration .....	5-12
Additional Notes about Calibration.....	5-17

This section shows the EZ Match Imager’s calibration options, and explains the different ways that those options can be configured.

# Calibration Serial Commands

---

Calibration Options	<K529,gain,shutter speed,symbol type,WOI framing,WOI margin,line scan height,processing>
Calibration	<@CAL>

---

## Calibration Overview

**Calibration** is one of the most powerful features of the EZ Match Imager. The calibration process can be initiated by serial command, EZ Button, or **ESP** user interface.

When the imager enters calibration, it runs through an optimization cycle that sets the ideal parameters for reading symbols at the highest possible level of performance. Calibration can be specially configured to optimize specific parameters, such as gain, shutter speed, and symbol type.

The calibration process consists of five separate phases: search pass, medium pass, and fine-tune pass. During this process the imager quickly locates configuration setup, defines a calibration range for the configuration parameters, and then tunes those parameters for optimal performance.

# Calibration Options

This command specifies the operation of the imager's calibration feature. The default configuration is set up to perform calibration on gain and symbol type. The default shutter speed setting is disabled, because not all applications require shutter speed, and when it is required, the application-specific settings tend to vary widely.

**Note:** **Background Color** (page 11-25) is part of the calibration process regardless of the calibration setup. After successful completion of the calibration routine, the background color will be set to the appropriate value, depending on the symbol in the field of view. The **Mirrored Image** parameter (page 11-26) is not part of the calibration process, and it must be configured appropriately *prior to calibration*.

## Gain

**Definition:** When enabled, gain will be calibrated to provide the best available image quality and performance.

When disabled, gain is fixed and is not part of the calibration process.

**Serial Cmd:** `<K529,gain,shutter speed,symbol type,WOI framing,WOI margin,line scan height,processing>`

**Default:** **Enabled**

**Options:** 0 = Disabled **1 = Enabled**

## Shutter Speed

**Definition:** Unless an application is a static setup, the shutter speed setting should be configured by the user based on the application. For dynamic applications, the user should configure the shutter speed setting so the calibration process can optimize the gain for that setting.

**Serial Cmd:** `<K529,gain,shutter speed,symbol type,WOI framing,WOI margin,line scan height,processing>`

**Default:** **Disabled**

**Options:** **0 = Disabled** 1 = Enabled

2 = Fast Shutter

**Note:** The following table shows general guidelines for shutter speed configurations based on various line speeds. The configurations shown depend on the imager's optical configuration, and on symbol element size.

<b>Shutter Speed</b>	<b>Line Speed</b>
0 - 250	static
250 - 750	5" / sec
750 - 1500	10" / sec
1500 - 2000	15" / sec
2000 - 2500	20" / sec

### **Disabled (Shutter Speed)**

When this feature is disabled, the shutter speed is fixed and is not part of the calibration process.

### **Enabled (Shutter Speed)**

When this feature is enabled, shutter speed will be calibrated to provide the best possible image quality and performance.

### **Fast Shutter**

The calibration process will concentrate on achieving the fastest possible shutter setting that will still provide good performance. The image quality or contrast may not be as good as what would be achieved with the **Enabled** setting. The calibration process is not designed to choose the fastest shutter speed that can decode a symbol, but rather to optimize for the fastest shutter speed that still provides good image quality.

## Symbol Type

**Serial Cmd:** <K529,gain,shutter speed,**symbol type**,WOI framing,WOI margin,line scan height,processing>

**Default:** **Enabled**

**Options:** 0 = Disabled **1 = Enabled**

### Disabled

When this feature is disabled, only the currently-enabled symbologies will be considered during the calibration process.

### Enabled

When this feature is enabled, autodiscrimination will be in effect during the calibration process. All symbologies that are readable by the imager *except PDF417 and Pharmacode* will be considered during calibration. Any new symbologies successfully decoded during calibration will remain enabled at the end of the process. All enabled symbologies will remain enabled.

For example, assume that only Code 39 is enabled at the beginning of calibration. If a Code 128 symbol is read during calibration, then Code 128, as well as Code 39, will be enabled after the calibration process is complete.


## Window of Interest (WOI) Framing

**Definition:** If a WOI framing mode is enabled, it will set the camera WOI to a full-size image when calibration begins. Once a symbol is decoded, the camera WOI will be zoomed-in both vertically and horizontally (regardless of which WOI mode is enabled) to include the symbol plus an additional margin area. This is done to accelerate the calibration process. When a successful calibration process is completed, the camera WOI will be adjusted according to the mode enabled. Otherwise, the original WOI configuration will be retained.


**Serial Cmd:** `<K529,gain,shutter speed,symbol type,WOI framing,WOI margin,line scan height,processing>`

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Row and Column  
2 = Row                                      3 = Column  
4 = Straight Line                         5 = Straight Line Framed

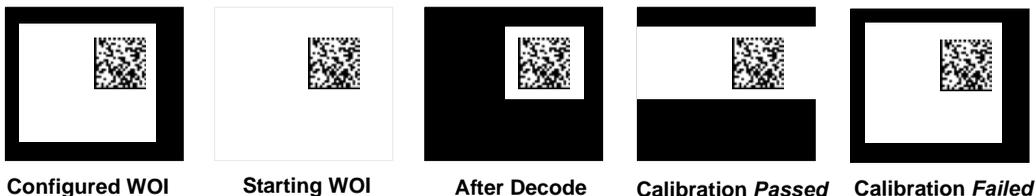

If WOI framing is not enabled, the current WOI configuration will be used until a symbol has been decoded. After a symbol is decoded, the WOI is framed exactly as it would be if a WOI framing mode was enabled. When the calibration process is complete, the original WOI configuration is restored. Refer to the diagram below:

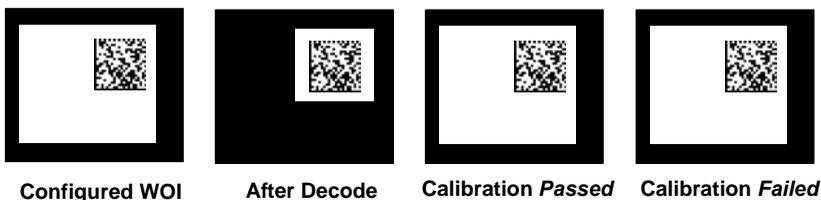

## Disabled

When this feature is disabled, the Window of Interest is not modified after the calibration process is complete.

## Row and Column

If the calibration process is successful, the Window of Interest will be modified to frame the symbol as well as an additional margin area around the symbol, determined by the **WOI Margin** parameter. Refer to the diagram below:



## Column

If the calibration process is successful, the Window of Interest columns will be modified to vertically frame the symbol, plus an additional margin area around the symbol, determined by the **WOI Margin** parameter. Refer to the diagram below:



## Row


If the calibration process is successful, the Window of Interest rows will be modified to horizontally frame the symbol, plus an additional margin area around the symbol, determined by the **WOI Margin** parameter. Refer to the diagram below:



## Straight Line

This feature is intended for use with linear symbologies. If the calibration process is successful, the orientation of the symbol is determined and the Window of Interest is modified according to the symbol orientation. The scan line orientation is determined to be vertical if the symbol tilt is between 225° and 315°, or between 45° and 135°. Otherwise, the scan line will be horizontal.

If the symbol is vertical, the image column size will be set by the scan height parameter, and will be configured for full row resolution. If the symbol is horizontal, the image row size will be set by the scan height parameter, and will be configured for full column resolution. The scan line will be centered in the middle of the symbol. If the symbol is tilted such that the scan line will not pass completely through the symbol, the scan width will be adjusted to include the entire symbol. Refer to the diagram below:

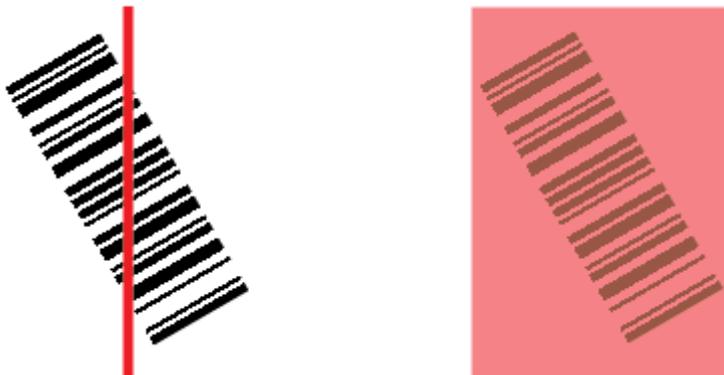

## Straight Line Framed

This parameter is the same as “Straight Line”, except that the Window of Interest will also frame the scan line on the symbol length as well. The scan line includes the symbol plus an additional margin area determined by the **WOI Margin** parameter.

## Window of Interest (WOI) Margin

**Definition:** Sets the margin size that is applied to the calibrated symbol. This parameter is expressed in number of pixels. If the margin causes the image to exceed the maximum image size, it will be reduced accordingly.

**Serial Cmd:** <K529,gain,shutter speed,symbol type,WOI framing,**WOI margin**,line scan height,processing>

**Default:** 75 (pixels)

**Options:** 20 to 1280

## Line Scan Height

**Definition:** This parameter is only used with the Straight Line modes. It sets the scan height of the straight-line image, and it is expressed in number of pixels.

**Serial Cmd:** <K529,gain,shutter speed,symbol type,WOI framing,WOI margin,**line scan height**,processing>

**Default:** 64 (pixels)

**Options:** 3 to 1024

## Processing

**Definition:** This setting defines the amount of time and effort the imager will spend attempting to decode a symbol for each parameter configuration.

**Serial Cmd:** <K529,gain,shutter speed,symbol type,WOI framing,WOI margin,line scan height,**processing**>

**Default:** **Medium**

**Options:** 0 = Low

**1 = Medium**

2 = High

3 = Definable

### Low

The imager will spend a low amount of effort attempting to decode the given symbol for each parameter configuration.

### Medium

The imager will spend a medium amount of effort attempting to decode the given symbol for each parameter configuration.

### High

The imager will spend a high amount of effort attempting to decode the given symbol for each parameter configuration.

### Definable

The processing time for each image frame is defined by the **Image Processing Timeout** parameter <K245>.

# Calibration by ESP

ESP's **Calibration** view incorporates all the functionality of the **<K529> (Calibration Options)** command in a single easy-to-use, intuitive interface. This calibration process allows the user much finer control of individual parameters than the calibration routine in **EZ Mode** or on the **Video** tab.

## Before / During Calibration

The screenshot shows the Calibration by ESP interface with several callout boxes:

- Before and After tabs** give the user an authentic representation of the difference in what the imager "sees" before and after the calibration routine.
- Focus, Shutter, Gain, and Image Quality** values are all tracked in real-time during the calibration process.
- Gain and Shutter Speed** are configurable in the **Calibration** interface.
- Processing** dropdown menu (set to Medium\*) determines the amount of time and effort the imager will spend attempting to decode a symbol for each parameter configuration. (**Low, Medium, High, Definable**).
- Symbology Settings** dropdown menu of **1D** and **2D** symbologies, and a check box for enabling or disabling **Composite** symbologies.
- Calibrate** button initiates the calibration routine.
- Cancel** button cancels the calibration process, if necessary.
- Window of Interest** section allows the user to make precise adjustments to **WOI Framing**, **WOI Margin** (in pixels), and the scan height of the straight-line image (in pixels).

The **Window of Interest** section of the **Calibration** interface allows the user to make precise adjustments to **WOI Framing**, **WOI Margin** (in pixels), and the scan height of the straight-line image (in pixels).

## After Calibration

Notice the improved image resolution after the calibration process is complete.

The **Focus, Shutter, Gain, and Quality** indicator bars remain stationary at the end of calibration to provide a visual reference for the final values of these four parameters.

The calibration progress bar indicates that the process has been completed.

Saves the optimal configuration parameters determined by calibration results.

Before After

240 250 38 8792

Focus Shutter Gain Quality

Capture Settings

Gain 38

Shutter Speed 250

Processing

Medium\*

Symbology Settings

Symbology Type

(ECC 200, Code 39)

Composite Enabled

Window of Interest

WOI Framing Disabled\*

WOI Margin 75

Linescan Height 64

Calibrate

Cancel

Save


# Initiating Calibration

Calibration can be initiated by serial command, the EZ Button, or from the **Calibration** interface in **ESP**.

In **ESP**, the **Calibrate** button starts the calibration routine.



To initiate calibration by serial command, enter the serial command **<@CAL>** from a terminal, such as **ESP's Terminal** interface. **<@CAL>** is a calibration routine that emphasizes contrast and readability.

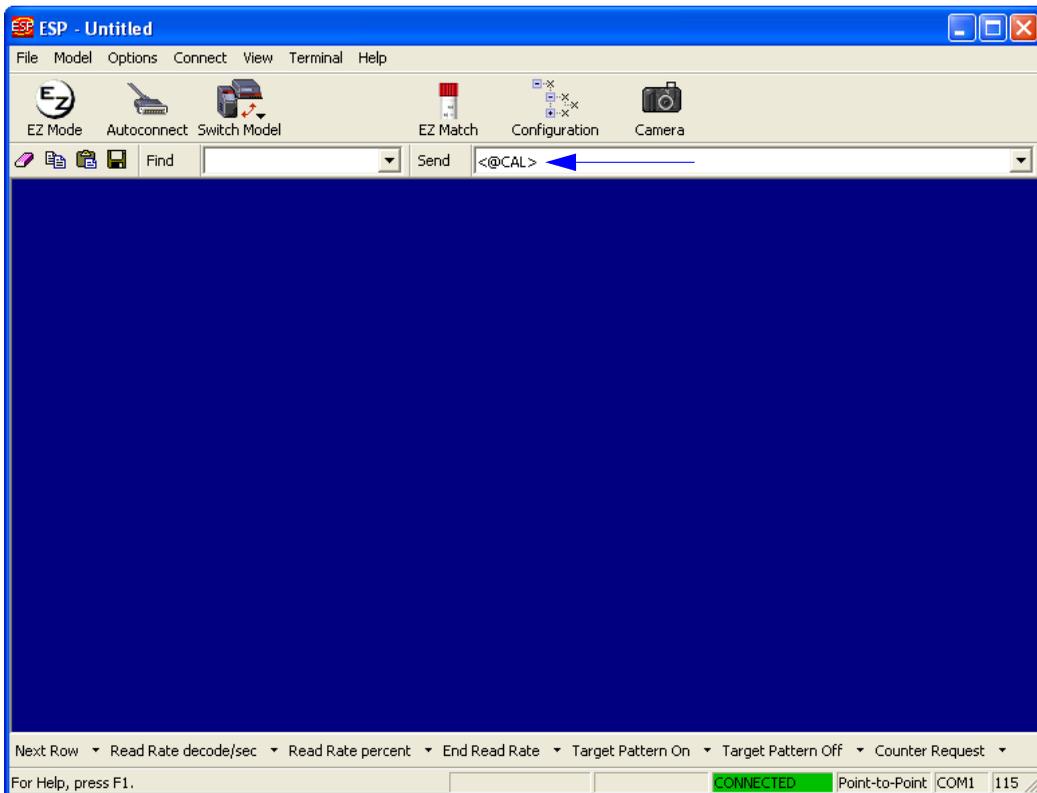

See **Calibrate by EZ Button** on page 1-11 for the EZ Button calibration procedure.


## Calibration Progress Indicators

During the calibration process, the imager has a number of ways to communicate its progress to the user. The following three types of feedback are the primary ways that the imager communicates calibration progress.

### Read Rate LEDs

When calibration is initiated through a serial command or the EZ Button, the imager's Read Rate LEDs indicate calibration progress as follows:

<b>LEDs</b>	<b>Calibration Progress</b>
20%	Search Pass in progress.
20%, 40%, 60%	Medium Pass in progress.
20%, 40%, 60%, 80%	Fine-Tune Pass in progress.
20%, 40%, 60%, 80%, 100%	Calibrated Successfully (holds for green flash duration).

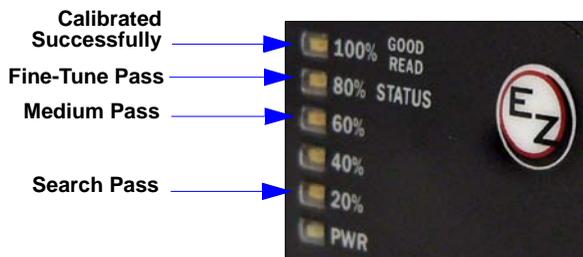

### Beeper / Green Flash

The beeper and green LED flash are used to indicate calibration status as shown in the table below:

<b>Indicator</b>	<b>Status</b>
2 quick beeps	Calibration has started.
5 quick beeps	Calibration has failed.
1 long beep	Calibration has been completed successfully.
1 sec. Green Flash	Calibration has been completed successfully.

## Calibration Progress Output to Terminal

When initiated by serial command or EZ Button, the calibration operation will output progress and process information to a terminal if the system is configured to do so.

### Terminal

Depending upon how the calibration options are configured, the calibration process can have up to 5 steps (Search Pass, Medium Pass, Fine-Tune Pass). Calibration data is shown in a simple table format under 8 category headings, each of which are defined below.

<i>Heading</i>	<i>Definition</i>
Prog	Progress indicator with a range of 0 - 100. Indicates percent complete.
Rating	Rating indicator; higher ratings are more favorable.
Decode	Number of successful decodes for the pass.
Quality	Quality indicator; higher ratings are more favorable.
Shutter	Shutter setting under operation.
Gain	Gain setting under operation.
Locate	Time required to locate symbol, expressed in milliseconds.

## Calibration Progress Output Examples (Terminal)

### Search Pass

The purpose of **Search Pass** is to decode a symbol in as few configurations as possible during calibration. This process is designed to identify symbology type, and to identify any other image processing parameters that are already calibrated.

#### Running Search Pass

<i>Prog</i>	<i>Rating</i>	<i>Decode</i>	<i>Quality</i>	<i>Focus</i>	<i>Shutter</i>	<i>Gain</i>	<i>Locate</i>
12	0	0	0	313	250	0	0
14	0	0	0	313	250	9	0
16	0	0	0	313	250	18	0
18	2174	1	72	313	250	27	24

### Medium Pass

The theory behind **Medium Pass** is to develop a readable range from which to dial in a decoded symbol.

#### Running Medium Pass

<i>Prog</i>	<i>Rating</i>	<i>Decode</i>	<i>Quality</i>	<i>Focus</i>	<i>Shutter</i>	<i>Gain</i>	<i>Locate</i>
51	4216	2	8	386	250	0	5
53	8436	4	20	386	250	4	4
55	6336	3	24	386	250	8	4
57	8448	4	32	386	250	12	4
59	8456	4	40	386	250	16	5
61	8464	4	48	386	250	20	4
63	8472	4	56	386	250	24	5
65	8488	4	72	386	250	28	5
67	8504	4	88	386	250	32	5
69	8512	4	96	386	250	36	5
71	8528	4	112	386	250	40	6
73	8584	4	168	386	250	44	5
75	8644	4	228	386	250	48	5

#### Rating List (Best):

*Rating = 8606; Focus = 386; Shutter = 250; Gain = 48*

*Rating = 8581; Focus = 386; Shutter = 250; Gain = 44*

*Rating = 8553; Focus = 386; Shutter = 250; Gain = 40*

*Rating = 8527; Focus = 386; Shutter = 250; Gain = 36*

*Rating = 8505; Focus = 386; Shutter = 250; Gain = 32*

*Rating = 8488; Focus = 386; Shutter = 250; Gain = 28*

*Rating = 8476; Focus = 386; Shutter = 250; Gain = 24*

---

*Initiating Calibration*

**Fine-Tune Pass**

The theory behind **Fine-Tune Pass** is to dial in a decoded symbol based on the range supplied by the **Medium Pass**.

**Running Fine Tune Pass**

<i>Prog</i>	<i>Rating</i>	<i>Decode</i>	<i>Quality</i>	<i>Focus</i>	<i>Shutter</i>	<i>Gain</i>	<i>Locate</i>
77	6416	3	104	386	250	38	7
79	6424	3	112	386	250	39	6
81	6424	3	112	386	250	40	6
84	6432	3	120	386	250	41	6
86	6448	3	136	386	250	42	5
88	6464	3	152	386	250	43	5
90	6476	3	164	386	250	44	5
93	6488	3	176	386	250	45	5
95	6506	3	194	386	250	46	6
97	6524	3	212	386	250	47	5
100	6538	3	226	386	250	48	6

*Rating List (Best):*

- Rating = 6527; Focus = 386; Shutter = 250; Gain = 48*
- Rating = 6517; Focus = 386; Shutter = 250; Gain = 47*
- Rating = 6505; Focus = 386; Shutter = 250; Gain = 46*
- Rating = 6491; Focus = 386; Shutter = 250; Gain = 45*
- Rating = 6476; Focus = 386; Shutter = 250; Gain = 44*
- Rating = 6462; Focus = 386; Shutter = 250; Gain = 43*
- Rating = 6449; Focus = 386; Shutter = 250; Gain = 42*

*Calibration PASSED.*

## Additional Notes about Calibration

The following conditions apply to the imager's calibration process. Some of these items are noted at various points throughout this section, or in other sections of the imager's documentation.

1. The **Mirrored Image** parameter **<K514>** is not part of the calibration process.
2. **Background Color <K451>** is calibrated.
3. If **Window of Interest Framing** is enabled, the WOI will be set to full frame when calibration begins. If **WOI Framing** is disabled, the current WOI configuration will be used for the **Search Pass**.
4. **IP Mode <K527>** will not be altered during calibration.
5. **Threshold Mode <K512>** will be set to **Adaptive** during calibration. At the end of a successful calibration, **Threshold Mode** will remain set to **Adaptive** regardless of its previous setting. Otherwise, the value will revert to its original state.
6. If **Symbol Type** is enabled for calibration (**Autodiscriminate**), then Interleaved 2 of 5 **Range Mode <K472>** will be enabled. This allows variable-length Interleaved 2 of 5 symbols to be decoded. If an Interleaved 2 of 5 symbol is decoded during calibration, then code length # 1 will be set to the decoded symbol length at the end of calibration. Otherwise, the symbol lengths will be restored to their original configurations.
7. **Pharmacode** is not calibrated.
8. The symbol size, dimension, and orientation parameters of the **No Symbol / Bad Symbol** and **Symbol Qualification** command **<K718>** will be updated if calibration is completed successfully.
9. All symbol types that were enabled before calibration will still be enabled after calibration. For example, if Data Matrix ECC 200 was enabled before calibration, and the calibration routine was performed on a Code 128 symbol, then after calibration is completed both Data Matrix ECC 200 and Code 128 will be enabled.
10. The calibration process does not modify the global **Composite** status **<K453>**. The global Composite status must be configured properly before calibration.
11. If the user requires calibration of a **stacked** symbology **<K482>**, **<K483>**, or **<K484>**, that symbology must be enabled and configured appropriately before calibration.
12. The **Search** process will use the configurable Window of Interest for image captures. However, when the search process is completed, the WOI will be reduced to include only the symbol of interest and some additional boundary area.

---

*Additional Notes about Calibration*



# 6 Read Cycle

## Contents

- Read Cycle by ESP ..... 6-2
- Read Cycle Serial Commands..... 6-3
- Read Cycle Setup..... 6-4
- Multisymbol..... 6-5
- Trigger Mode and Duration..... 6-7
- External Trigger Polarity ..... 6-12
- Serial Trigger ..... 6-13
- Start Trigger Character (Non-Delimited)..... 6-14
- Stop Trigger Character (Non-Delimited)..... 6-15
- End of Read Cycle..... 6-16
- Capture Mode ..... 6-18
- Capture Timing ..... 6-23
- Image Storage ..... 6-25
- Minimum Good Reads ..... 6-28

After you've established communications with the imager, you will need to address the spatial and timing parameters associated with your application. This section explains those parameters.

# Read Cycle by ESP



Click the **Parameters** button and then the **Read Cycle** tab.

Parameters	ESP Values
[-] Read Cycle	
[+] Multisymbol	
[+] Trigger	
[+] Serial Trigger	
Decodes Before Output	1
Tube / Cap Presence Before Output	3
Cap Unknown Presence Before Output	2
[+] End of Read Cycle	
[+] Capture Mode	Continuous Capture*
[+] Capture Time	Rapid Capture
[+] Store Noread Image	Continuous Capture*
[+] Image Processing Settings	

To open nested options, **single-click** the **+**.

To change a setting, **double-click** the setting and use your cursor to scroll through the options.

## Read Cycle Serial Commands

Trigger Mode/Duration	< <b>K200</b> , <i>trigger mode,trigger filter duration</i> >
Serial Trigger Character	< <b>K201</b> , <i>serial trigger character</i> >
External Trigger State	< <b>K202</b> , <i>external trigger state</i> >
End of Read Cycle	< <b>K220</b> , <i>end of read cycle,read cycle timeout</i> >
Minimum Good Reads	< <b>K221</b> , <i>minimum good reads</i> >
Multisymbol	< <b>K222</b> , <i>number of symbols,multisymbol separator</i> >
Start Trigger Character	< <b>K229</b> , <i>start character</i> >
Stop Trigger Character	< <b>K230</b> , <i>stop character</i> >
Capture Mode	< <b>K241</b> , <i>capture mode,number of captures,rapid capture mode,pre-processing</i> >
Capture Timing	< <b>K242</b> , <i>time before first capture,time between first and second captures,,,,,,,,,time between seventh and eighth captures</i> >
Image Storage	< <b>K244</b> , <i>image storage type,image store mode</i> >

## **Read Cycle Setup**

Setting up Read Cycle and triggering parameters will involve a series of decisions based on your particular application, as follows:

1. Select the number of symbols to be read in a single cycle. The EZ Match Imager can read multiple symbols in a single image frame.
2. Decide on the trigger type to be used: if serial, choose a serial character; if external, choose either **Level** or **Edge**.
3. Designate how the read cycle should end (**Timeout**, **New Trigger**, **Last Frame**).
4. Select **Capture Mode**, **Continuous Mode**, or **Rapid Capture Mode**.
5. Select **Number of Captures** (if in **Rapid Capture Mode**).
6. Set the **Time Before First Capture** and **Time Between Captures**, if any.

**Note:** The imager's camera captures images at a rate of about 16/second (based on a full-size 1280 x 1024 monochrome image). The capture rate increases as frame sizes decrease.

# Multisymbol

- Usage:** Multisymbol is commonly used in shipping applications where a shipping symbol contains individual symbols for part number, quantity, etc. This feature allows on trigger to pick up all the symbols.
- Definition:** **Multisymbol** allows the user to define up to 100 symbols that can be read in a single read cycle.
- Conditions:** The following conditions apply:
- Each symbol must be different to be read, unless in **Rapid Capture Mode**, configured for “triggered capture”.
  - The maximum number of characters in a read cycle is 3,000 for all symbols.
  - All No Read messages are posted at the end of the data string, unless output filtering is enabled.
  - If more than one symbol is within the field of view at the same time, symbol data may not be displayed in the order of appearance.
  - If **Matchcode Type** is set to **Sequential** or if **Trigger** is set to **Continuous Read 1 Output**, the imager will behave as if **Number of Symbols** were set to **1**, regardless of the user-defined configuration.

## Number of Symbols

**Definition:** This parameter has no function when a **Multi-Operation** read cycle is active. Each operation index (1 through 3) requires one qualified output for each active operation.

*Example:* If tube and cap detection are both enabled for operation index **1**, the required number of symbols for that index would be **2**.

**Important:** The same symbol, tube, or cap can be processed and qualified by two different operations in the same read cycle.

**Serial Cmd:** <**K222,number of symbols**, multisymbol separator>

**Default:** **1**

**Options:** 1 to 100

## **Multisymbol Separator**

- Usage:** Used to delimit or separate data fields with a user defined character.
- Definition:** Any valid ASCII character, inserted between each symbol read when Multisymbol is set to any number greater than 1.
- Serial Cmd:** **<K222,number of symbols,multisymbol separator>**
- Default:** , (comma)
- Options:** Any available ASCII character.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: **<K222h,,3C>**

For >: **<K222h,,3E>**

For , : **<K222h,,2C>**

See [ASCII Character Entry Modifier](#) on page 4-33 for a more detailed explanation of how to enter ASCII characters as hex values.

**Note:** If No Read messages are disabled and there are No Reads occurring, separators will only be inserted between symbol data outputs.

# Trigger Mode and Duration

## Trigger

*Definition:* The event that initiates the read cycle.

**Note:** When calibrating the imager or testing Read Rate, the current trigger setting will be disregarded.

## Trigger Mode

*Serial Cmd:* <K200,trigger mode,trigger filter duration>

*Default:* **Continuous Read**

*Options:* **0 = Continuous Read**

1 = Continuous Read 1 Output

2 = External Level

3 = External Edge

4 = Serial Data

5 = Serial Data and Edge

## Continuous Read

*Usage:* **Continuous Read** is useful in testing symbol readability or reader functions. It is not recommended for normal operations.

*Definition:* In **Continuous Read**, trigger input options are disabled, the imager is always in the read cycle, and it will attempt to decode and transmit every capture. If a single symbol stays within read range for multiple read cycles, its data will be transmitted repeatedly until it leaves the read range.

The imager sends replies to serial commands that require responses when symbol data is transmitted, or read cycle timeout is enabled and a timeout occurs *and* at least one captured image has been processed. Depending on the combination of enabled symbologies and the Threshold Mode setting, the imager may take longer than the timeout to process a captured image.

**Note: When to Output and No Read** options have no affect on **Continuous Read**.

*Serial Cmd:* <K200,0>

## Continuous Read 1 Output

**Usage:** **Continuous Read 1 Output** can be useful in applications where it is not feasible to use a trigger and all succeeding symbols contain different information. It is also effective in applications where the objects are presented by hand.

**Definition:** In **Continuous Read 1 Output** the imager self-triggers whenever it decodes a new symbol or a timeout occurs.

If **End of Read Cycle** is set to **Timeout** and the symbol doesn't change, the output is repeated at the end of each timeout period. For example, if **Timeout** is set to one second, the imager sends the symbol data immediately and repeats the output at intervals of one second for as long as it continues to capture the symbol.


If **End of Read Cycle** is set to **New Trigger**, the imager will send the current symbol data immediately, *but only once*. A new symbol appearing in the imager's range will be read and sent immediately, provided it is not identical to the previous symbol.

**Serial Cmd:** **<K200,1>**

**Caution:** In automated environments, **Continuous Read 1 Output** is not recommended because there is typically no reliable way to verify that a symbol was missed.

**Note:** If **Trigger Mode** is set to **Continuous Read 1 Output**, the imager will behave as if **Number of Symbols** were set to **1**, regardless of the user-defined configuration.

## External Level

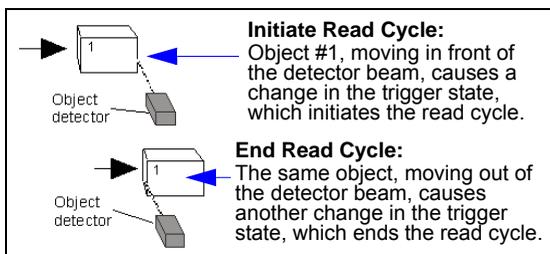


**Usage:** This mode is effective in an application where the speeds of the conveying apparatus are variable and the time the imager spends reading each object is not predictable. It also allows the user to determine if a No Read has occurred.

**Definition:** **External Level** allows the read cycle (active state) to begin when a trigger (change of state) from an external sensing device is received. The read cycle persists until the object moves out of the sensor range and the active trigger state changes again.

**Serial Cmd:** **<K200,2>**

**Important:** **Level** and **Edge** apply to the active logic state (**Negative** or **Positive**) that exists while the object is in a read cycle, between the rising edge and the falling edge. *Rising edge* is the trigger signal associated with the appearance of an object. *Falling edge* is the trigger signal associated with the subsequent disappearance of the object. This applies both to **External Level** and **External Edge**.

## External Edge

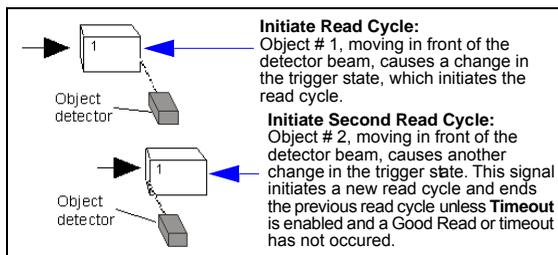

**Usage:** This mode is highly recommended in any application where conveying speed is constant, or if spacing, object size, or read cycle timeouts are consistent.

**Definition:** **External Edge**, as with **Level**, allows the read cycle (active state) to begin when a trigger (change of state) from an external sensing device is received. However, the passing of an object out of sensor range does not end the read cycle. The read cycle ends with a Good Read output, or, depending on the **End of Read Cycle** setting, a timeout or new trigger occurs.

**Serial Cmd:** **<K200,3>**

## Serial Data

*Usage:* **Serial Data** is effective in a highly controlled environment where the host knows precisely when the object is in the field of view. It is also useful in determining if a No Read has occurred.

*Definition:* In **Serial Data**, the imager accepts an ASCII character from the host or controlling device as a trigger to start a read cycle. A **Serial Data** trigger behaves the same as an **External Edge** trigger.

Serial commands are entered inside angle brackets, as shown here: <↳>.

*Serial Cmd:* <K200,4>

**Note:** In **Serial Data**, sending a non-delimited start serial character will start a read cycle; however, a non-delimited stop serial character has no effect.

## Serial Data and Edge

*Usage:* **Serial Data and Edge** is seldom used but can be useful in an application that primarily uses an external sensing device but occasionally needs to be triggered manually.

An auxiliary terminal can be connected to the auxiliary port so the user can send the serial trigger character through the imager to the host.

*Definition:* In this mode the imager accepts either a serial ASCII character or an external trigger pulse to start the read cycle.

*Serial Cmd:* <K200,5>

**Note:** In **Serial Data**, sending a non-delimited start serial character will start a read cycle; however, a non-delimited stop serial character has no effect.

## Trigger Filter Duration

**Usage:** **Trigger Filter Duration** allows the imager to disregard false trigger events.

**Definition:** When **Trigger Mode** is set to either **External Edge** or **External Level**, the read cycle's active state must be delayed until the specified filter duration has elapsed. The imager will trigger at the end of that duration.

**Serial Cmd:** <**K200**,*trigger mode*,**trigger filter duration**>

**Default:** **313** (in 32 $\mu$ s increments)

**Options:** 1 to 65535 (corresponding with 32 $\mu$ s to 2.10 seconds in 32 $\mu$ s steps)

**Note:** If **Trigger Mode** is set to **External Edge**, the imager will trigger only after the active state has been delayed for the specified filter duration.

**Note:** If **Trigger Mode** is set to **External Level**, the imager will trigger once the active state has been delayed for the specified filter duration *after the appearance of an object's active edge*.

In addition, the active state must be delayed for the specified filter duration *after the disappearance of the object's falling edge* for the trigger to be rendered inactive.

## **External Trigger Polarity**

*Usage:* Allows users to select the trigger polarity that will be used in their application.

*Definition:* Determines the active state of the trigger signal applied to the cable input of the imager.

*Serial Cmd:* **<K202,active state>**

*Default:* **Positive**

*Options:* 0 = Negative                      **1 = Positive**

## Serial Trigger

**Usage:** Allows the user to define the trigger character and delimiters that start and stop the read cycle.

**Definition:** A serial trigger is considered an online host command and requires the same command format as all host commands. It must be entered within angle bracket delimiters `< >` or, in the case of non-delimited triggers, it must define individual start and stop characters.

### **Serial Trigger Character (Delimited)**

**Usage:** Allows the user to define the trigger character that initiates the read cycle.

**Definition:** A single ASCII host serial trigger character that initiates the read cycle. A delimited trigger character is one that either starts or ends the read cycle and is enclosed by delimiters such as `< >`.

**Serial Cmd:** `<K201,serial trigger character>`

**Default:** **Space bar**

**Options:** Any single ASCII character, including control characters, except **NUL (00** in hex), an existing host command character, or an on-line protocol character. Control characters entered on the command line are displayed in the menu as mnemonic characters.

**Note:** **Serial Data** or **Serial Data and Edge** triggering mode must be enabled for **Serial Trigger Character** to take effect.

**Important:** The ASCII characters `<`, `>`, and `,` can only be entered as hex pairs:

For `<`: `<K201h,3C>`

For `>`: `<K201h,3E>`

For `,`: `<K201h,2C>`

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Start Trigger Character (Non-Delimited)

**Usage:** Useful in applications where different characters are required to start a read cycle.

**Definition:** A single ASCII host serial trigger character that starts the read cycle and is not enclosed by delimiters such as < and >.

Non-delimited **Start** characters can be defined and will function according to the trigger event.

When defining **Start** trigger characters, the following rules apply:

- In **External Edge** the imager looks only for the **Start** trigger character and ignores any **Stop** trigger character that may be defined.
- In **External Level** the **Start** trigger character begins the read cycle and the **Stop** trigger character ends it. Note that even after a symbol has been decoded and the symbol data transmitted, the imager remains in **External Level** trigger read cycle until a **Stop** character is received.
- In **Serial Data and Edge** trigger mode, either a **Start** trigger character or a hardware trigger can start an edge trigger read cycle.

**Serial Cmd:** <K229,start character>

**Default:** NUL (00 in hex; disabled)

**Options:** Two hex digits representing any ASCII character except XON and XOFF.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K229h,3C>

For >: <K229h,3E>

For , : <K229h,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Stop Trigger Character (Non-Delimited)

- Usage:** Useful in applications where different characters are required to end a read cycle.
- Definition:** A single ASCII host serial trigger character that ends the read cycle and is not enclosed by delimiters such as **<** and **>**. Non-delimited **Stop** characters can be defined and will function according to the trigger event. When defining **Stop** trigger characters, the following rules apply:
- In **External Edge** the imager looks only for the **Start** trigger character and ignores any **Stop** trigger character that may be defined.
  - In **External Level** the **Start** trigger character begins the read cycle and the **Stop** trigger character ends it. Note that even after a symbol has been decoded and the symbol data transmitted, the imager remains in **External Level** trigger read cycle until a **Stop** character is received.
  - In **Serial Data and Edge** trigger mode, either a **Start** trigger character or a hardware trigger can start an edge trigger read cycle.
- Serial Cmd:** **<K230,stop character>**
- Default:** **NUL** (00 in hex; disabled)
- Options:** Two hex digits representing an ASCII character.

**Important:** The ASCII characters **<**, **>**, and **,** can only be entered as hex pairs:

For **<**: **<K230h,3C>**

For **>**: **<K230h,3E>**

For **,**: **<K230h,2C>**

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## End of Read Cycle

**Definition:** The read cycle is the time during which the imager will attempt to capture and decode a symbol or detect a tube or cap. A read cycle can be ended by a timeout, a new trigger, or by the last frame in a capture sequence or a combination of the above.

**Note:** **End of Read Cycle** settings apply to the entire read cycle, while **Multi-Operation Timeout** applies only to the specific operation (1 through 3) for which it is defined.

### End of Read Cycle Mode

**Note:** When operating in Continuous Read or Continuous Read 1 Output, the imager is always in the read cycle.

**Serial Cmd:** <K220,**end of read cycle**,read cycle timeout>

**Default:** **Timeout**

**Options:** **0 = Timeout**

1 = New Trigger

2 = Timeout and New Trigger

3 = Last Frame

4 = Last Frame and New Trigger

### Timeout

**Usage:** Typically used with **Serial Data and Edge** and **Continuous Read 1 Output**. It is effective in highly controlled applications when the maximum length of time between objects can be predicted. It assures that a read cycle ends before the next symbol appears, giving the system extra time to decode and transmit the data to the host.

**Definition:** **Timeout** ends the read cycle, causing the reader to stop reading symbols and send the symbol data or No Read message when the time set in **Timeout** elapses (times out), *if* **When to Output** is set to **End of Read Cycle**.

If in **Continuous Read 1 Output**, a timeout initiates a new read cycle and allows the same symbol to be read again.

With **External Edge**, **Serial Data**, or **Serial Data and Edge** enabled, a timeout ends the read cycle and symbol data or a No Read message is sent to the host.

With **External Level** enabled, the read cycle does not end until the falling edge trigger occurs or a timeout occurs. The next read cycle does not begin until the next rising edge trigger.

## New Trigger

**Usage:** **New Trigger** is an effective way to end a read cycle when objects move past the reader at irregular intervals (not timing-dependent).

**Definition:** **New Trigger** ends the current read cycle and initiates a new one when a new trigger occurs. **New Trigger** refers only to a rising edge trigger. With **External Edge**, **Serial Data**, or **Serial Data and Edge** enabled, an edge or serial trigger ends a read cycle and initiates the next read cycle. In the case of **External Level**, a falling edge trigger ends the read cycle but the next read cycle does not begin until the occurrence of the next rising edge trigger.

## Timeout and New Trigger

**Usage:** Useful in applications that require an alternative way to end the read cycle. For example, if an assembly line should stop completely or the intervals between objects are highly irregular.

**Definition:** **Timeout and New Trigger** is identical to **Timeout** except that a timeout or a new trigger (whichever occurs first) ends the read cycle.

## Last Frame

**Usage:** Useful in applications in which the number of captures needed can be defined but the timeout duration varies.

**Definition:** **Last Frame** only applies to **Rapid Capture Mode**.

## Last Frame and New Trigger

**Usage:** Useful in applications in which line speeds are irregular and a new labelled object could appear before the last frame in a **Rapid Capture** sequence.

**Definition:** **Last Frame and New Trigger** is identical to **New Trigger** except that a new trigger or last frame (whichever occurs first) ends the read cycle.

## Read Cycle Timeout

**Definition:** **Read Cycle Timeout** is the duration of the read cycle.

**Serial Cmd:** <**K220**,end of read cycle,**read cycle timeout**>

**Default:** **250** (x10 ms or 2.5 seconds)

**Options:** 1 to 65535

# Capture Mode

*Definition:* **Capture Mode** relates to the way that images are captured and processed.

*Serial Cmd:* <K241,capture mode,number of captures,rapid capture mode,pre-processing>

*Default:* **Continuous Capture**

*Options:* 0 = Rapid Capture      1 = **Continuous Capture**


## Rapid Capture

*Definition:* In a rapid capture mode, one or multiple captures (as many as 32) can be taken at an interval specified by the time-between-captures parameter. In this mode, the only limiting time factor is integration and transfer timing.

## Continuous Capture

*Usage:* **Continuous Capture** is useful in applications with slower line speeds or where symbol spacing may be random or not time-dependent.

*Definition:* In **Continuous Capture Mode**, image captures are taken throughout the read cycle in a multi-buffered format (see diagram below). The imager begins processing the first captured image at the same time that it captures the second image. Captures will continue occurring throughout the read cycle until an end condition occurs, such as a timeout, a new trigger, the last frame in a capture sequence, or a combination of the above.

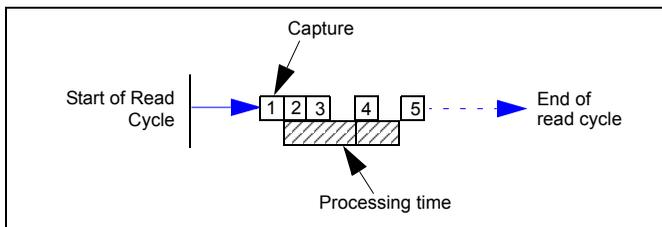

## Number of Captures

**Usage:** **Number of Captures** is used to specify the number of captures to be processed in **Rapid Capture Mode**.

**Definition:** Sets the total number of captures that are processed during a read cycle in **Rapid Capture Mode**. This feature is used in conjunction with **Capture Timing** parameters to specify the capture sequence of a rapid capture read cycle.

**Serial Cmd:** <K241,capture mode,number of captures,rapid capture mode,pre-processing>

**Default:** 1

**Options:** 1 to 64

**Note:** The range of maximum number of captures is dynamic. This range is dependent on the maximum image size in the system. A full-size image (1280 x 1024) reduces the maximum number of images to **6**. The smaller the image size, the greater the maximum number of captures. Once the image size is reduced to small enough dimensions, the maximum number of captures will be capped at **64**.

If a user enters a maximum capture value greater than that allowed, the value will be limited to the number of system images. This command also affects the number of stored images allowed in the system. If the maximum number of captures is selected, the number of stored images allowed will be **0**.

**Note: Number of Captures** specifies the *maximum* number of captures as it pertains to a **Multi-Operation** read cycle. When configured to switch operations on a frame count or timeout, the total number of captures cannot exceed this maximum value.

When configured to switch operations on a specified frame count and the operation completes before this maximum value is reached, the image frame count will increase automatically to match the frame switch count. This maintains image frame and timeout consistency for each operation index.

## Rapid Capture Mode

**Definition:** In **Rapid Capture Mode**, one or multiple captures (as many as 32) can be taken at an interval specified by the time-between-captures parameter. In this mode, the only limiting time factor is integration and transfer timing.

**Serial Cmd:** <K241,capture mode,number of captures,rapid capture mode,pre-processing>

**Default:** **Timed Capture**


**Options:** **0 = Timed Capture**      1 = Triggered Capture

## Timed Capture

**Usage:** **Timed Rapid Capture** is useful in fast-moving applications in which symbols are only in the field of view for a short time and precise timing is required.

**Definition:** In **Timed Rapid Capture**, decoding occurs independent of and simultaneous with capturing, thus allowing precise timing or no delay at all between captures.

Also, consecutive captures are regarded as the same symbol if the output data is the same.

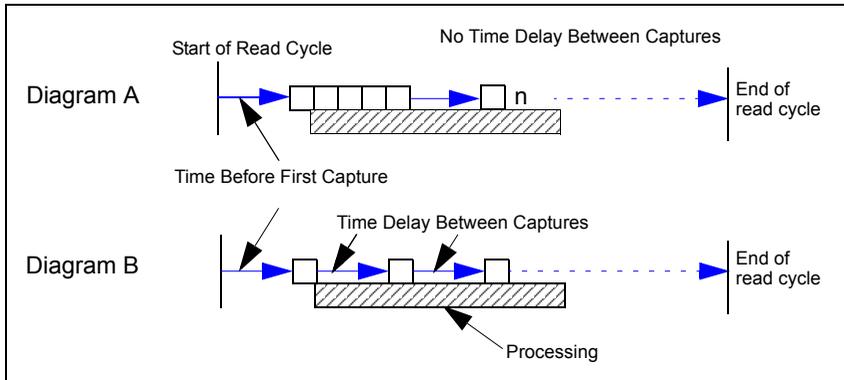


## Triggered Capture

**Usage:** Useful in applications where each decode must be treated as a discrete event, regardless of symbol data.

**Definition:** The first trigger event starts the read cycle, and subsequent triggers will continue until the predetermined **Number of Captures** is met, or until the predetermined **End of Read Cycle** condition is met-- whichever occurs first.

**Note:** If **End of Read Cycle** is set for **New Trigger** and the read cycle qualifications have not been met, the read cycle will only end *once it receives the first trigger after reaching the predetermined **Number of Captures** setting.*

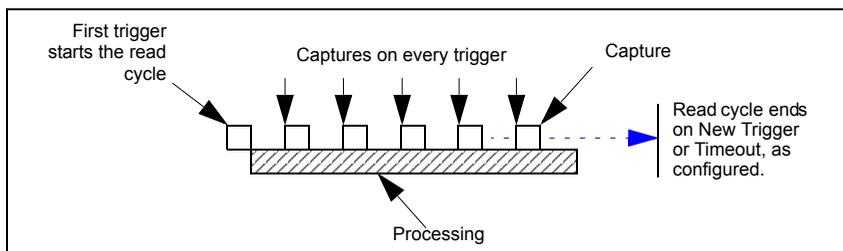

---

## Pre-Processing

**Definition:** When enabled, this feature reduces the time between image capture and decode by beginning the processing task while an image is being captured.

**Serial Cmd:** <K241,capture mode,number of captures,rapid capture mode,**pre-processing**>

**Default:** **Enabled**

**Options:** 0 = Disabled                      **1 = Enabled**

### Disabled

When **Pre-Processing** is disabled, the imager can process previously captured images while image capture events are taking place. The benefit of this operation is that the image capture events have minimal impact on image processing. Therefore, if the imager is configured to capture 4 consecutive frames, but it is only looking for one decode, it could process and decode a symbol on the first image frame before all 4 image frames were captured. If **Pre-Processing** were enabled, the imager could not start processing an image frame until all 4 image frames were captured (since they are consecutive captures).

### Enabled

When **Pre-Processing** is enabled, the imager performs pre-processing tasks while an image is being captured. Since some of the processing is complete when the image has been captured, the time required to complete the processing of the image frame will be less (approx. 10 ms/frame). However, while an image is being captured, the imager is dedicated to operating on the current image being captured. This means that an image capture event will impact the processing time of previously captured image frames. The benefit of this mode is the decrease in capture-to-decode time.

# Capture Timing

**Note:** Capture Timing applies only to **Rapid Capture Mode**.

## Time Before First Capture


**Usage:** In almost any moving line application, a time delay is needed to ensure that a symbol will be in the imager's field of view at the beginning of the capture sequence.

**Definition:** **Time Before First Capture** in a moving line application is the time between an external trigger event and the occurrence of the first capture.

**Serial Cmd:** <K242,time before 1st capture,time between capture 1 and capture 2,,,,,,,,,time between capture 7 and capture 8>

**Default:** 0

**Options:** 0 to 65535 (2.097 seconds, in 32  $\mu$ S increments)

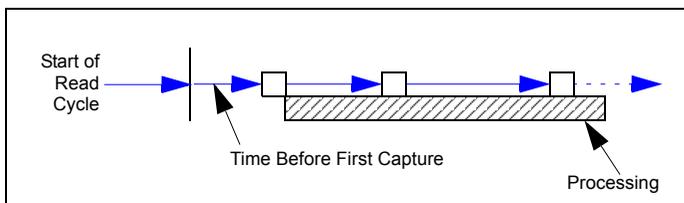

## Time Between Captures

**Usage:** This is useful in applications where more than one symbol can appear during a single read cycle (multisymbol), or where line speeds are slow enough that captured frames might overlap or miss a symbol.

**Definition:** A time delay can be inserted between individual frame captures in **Rapid Capture Mode**.

**Serial Cmd:** <K242,time before 1st capture,time between captures [time 1,time 2,...time7]

Entering 0s will result in no time between captures.


Entering a different value in each field will vary the time delays accordingly.

**Note:** You must enter time values along with comma separators for each field you want to change. If you omit fields, or enter only commas, the fields will remain as previously set.

**Default:** 0

**Options:** 0 to 65535 (2.097 seconds, in 32  $\mu$ S increments)

**Note:** Number of Captures and number of frame delays (**Time Between Captures**) must be the same.

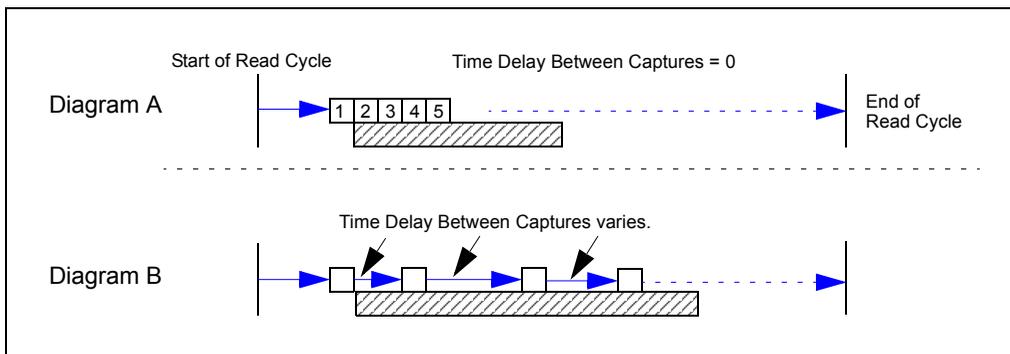

# Image Storage

## Image Storage Type

**Definition:** Allows the user to store images from separate read cycles and to retrieve them later. The number of available slots for storage depends on the mode of operation. If the imager is in **Rapid Capture Mode**, the number of images that can be stored is equivalent to the maximum number of the rapid count (the current rapid count setting). If the imager is in **Continuous Capture Mode**, a number of images equivalent to the maximum number of the rapid count minus 3.

**Serial Cmd:** <K244,*image storage type*,*image storage mode*>

**Default:** Disabled/Clear

**Options:** 0 = Disabled/Clear                      1 = Store on No Read

### Disabled / Clear

Upon selection of this option, all saved images will be cleared and the imager will not store images for later viewing.

### Store on No Read

This option will cause the imager to store an image upon exiting the read cycle for retrieval at a later time. If multiple captures are present during the duration of a read cycle, the stored image will be the last image processed for that read cycle. This image is stored in RAM and can be retrieved as long as power is cycled to the imager, and as long as the imager has not been reset via a reset/save sequence. Other commands that can initialize storage in RAM are ones that change capture modes or put the imager in a test capture mode.

**Note:** A **Cap Absence** or **Tube Absence** will qualify for image storage when **Store on No Read** is selected.

In a **Multi-Operation** read cycle with output set to **As Soon As Possible**, only the results from the last operation are retained. Therefore, if two operations are active, the first resulting in a No Read condition and the second *not* resulting in a No Read condition, no image will be stored.

## Image Storage Mode

Serial Cmd: <K244,image storage type,**image storage mode**>

Default: **First Mode**

Options: **0 = First Mode**                      1 = Last Mode

### First Mode

This mode allows the imager to store images until the available image memory has been filled. At that point the imager will stop saving additional images. In this mode, you will always have the first image captured, because the saving process stops once memory has been filled.

### Last Mode

In this mode, image storage continues after available memory limits are reached. The oldest image in memory is overwritten, so you will always have the most recent stored image.

## **Image Storage Example**

The following example assumes that the imager is in a rapid capture mode of 3 captures.

**Number of Symbols:** 1  
**Frame # 1:** No Read  
**Frame # 2:** No Read  
**Frame # 3:** Good Read, Symbol # 1  
**Read Cycle Result:** Good Read  
**Stored Frame:** **None**

**Number of Symbols:** 1  
**Frame # 1:** No Read  
**Frame # 2:** No Read  
**Frame # 3:** No Read  
**Read Cycle Result:** No Read  
**Stored Frame:** **Frame # 3**

**Number of Symbols:** 2  
**Frame # 1:** No Read  
**Frame # 2:** No Read  
**Frame # 3:** Good Read, Symbol # 1  
**Read Cycle Result:** No Read  
**Stored Frame:** **Frame # 2**

## **Minimum Good Reads**

*Definition:* This value specifies the number of times a symbol needs to be read to qualify as a Good Read.

*Serial Cmd:* **<K221,minimum good reads>**

*Default:* **1**

*Options:* 1 to 255



# 7 Symbologies

## Contents

- Symbologies by ESP ..... 7-2
- Symbologies Serial Commands ..... 7-3
- Data Matrix ..... 7-4
- QR Code ..... 7-6
- Code 39 ..... 7-7
- Code 128 / EAN-128 ..... 7-10
- BC412 ..... 7-13
- Interleaved 2 of 5 ..... 7-14
- Code 93 ..... 7-17
- Codabar ..... 7-18
- UPC/EAN ..... 7-21
- Pharmacode ..... 7-25
- GS1 DataBar (RSS) ..... 7-27
- PDF417 ..... 7-29
- MicroPDF417 ..... 7-31
- Composite ..... 7-32
- Narrow Margins / Symbology Identifier ..... 7-33

This section describes the various symbol types that can be read and decoded by the EZ Match Imager.

See the following sites for additional information about linear and 2D symbologies:

<http://www.aimglobal.org/standards/aimpubs.asp>

[http://barcodes.gs1us.org/dnn\\_bcec/Default.aspx?tabid=82](http://barcodes.gs1us.org/dnn_bcec/Default.aspx?tabid=82)

# Symbologies by ESP



Click the **Parameters** button and then the **Symbologies** tab.

To change a setting, **double-click** the setting and use your cursor to scroll through the options.

Parameters	ESP Values
[-] Symbologies	
[-] 2D Symbologies	
[-] Data Matrix	
ECC 200 status	Enabled
ECC 000 status	Disabled
ECC 050 status	Disabled
ECC 080 status	Disabled
ECC 100 status	Disabled
ECC 140 status	Disabled
ECC 120 status	Disabled
ECC 130 status	Disabled
QR Code	Disabled*
[+] 1D Symbologies	Disabled*
[+] Stacked Symbologies	Enabled
[+] Composite	Disabled
[-] Narrow Margin Status	Disabled
Symbology Identifier	Disabled
Background Color	White

To open nested options, **single-click** the +.

# Symbologies Serial Commands

Narrow Margins/Symbology ID	< <b>K450</b> , <i>narrow margin status,symbology identifier status</i> >
Background Color	< <b>K451</b> , <i>background color</i> >
Composite	< <b>K453</b> , <i>symbology status,separator status,separator</i> >
Code 39	< <b>K470</b> , <i>status,check character status,check character output status,large intercharacter gap,fixed symbol length status,fixed symbol length,full ASCII set</i> >
Codabar	< <b>K471</b> , <i>status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,symbol length,check character type,check character output</i> >
Interleaved 2 of 5	< <b>K472</b> , <i>status,check character status,check character output status,symbol length #1, symbol length #2, guard bar status,range mode status</i> >
UPC/EAN	< <b>K473</b> , <i>UPC status,EAN status,supplemental status,separator status,separator character,supplemental type,format UPC-E as UPC-A</i> >
Code 128/EAN-128	< <b>K474</b> , <i>status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding</i> >
Code 93	< <b>K475</b> , <i>status,fixed symbol length status,symbol length</i> >
PDF417	< <b>K476</b> , <i>status,[unused],fixed symbol length status,fixed symbol length,[unused],codeword collection</i> >
Pharmacode	< <b>K477</b> , <i>status,fixed bar count status,fixed bar count,minimum bar count,bar width mode,direction,fixed threshold value</i> >
Data Matrix	< <b>K479</b> , <i>ECC 200 status, ECC 000 status,ECC 050 status, ECC 080 status,ECC 100 status,ECC 140 status,ECC 120 status,ECC 130 status</i> >
QR Code	< <b>K480</b> , <i>status</i> >
BC412	< <b>K481</b> , <i>status,check character output,fixed symbol length status, fixed symbol length</i> >
DataBar-14	< <b>K482</b> , <i>status</i> >
DataBar Limited	< <b>K483</b> , <i>status</i> >
DataBar Expanded	< <b>K484</b> , <i>status,fixed symbol length status,fixed symbol length</i> >
MicroPDF417	< <b>K485</b> , <i>status,[unused],fixed symbol length status,fixed symbol length</i> >

# Data Matrix

**Usage:** Very useful where information needs to be packed into a small area, and/or where symbols need to be applied directly to the substrate with laser etching, chemical etching, dot pen, or other methods.

**Definition:** Data Matrix is a type of Matrix symbology. It is divided into error correction (ECC) subsets ECC 000 - ECC 200.

Data Matrix ECC 200 symbols (the most commonly used) have an even number of rows and an even number of columns. Most of the symbols are square with sizes from 10x10 to 144x144. Some symbols, however, are rectangular, with sizes from 8x18 to 16x48. All ECC 200 symbols can be recognized by the upper right corner module being light (binary 0) instead of dark.

## ECC 200

**Definition:** When enabled, will decode ECC 200 Data Matrix symbols.

**Serial Cmd:** <**K479,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,ECC 100 status,ECC 140 status,ECC 120 status,ECC 130 status**>

**Default:** **Enabled**

**Note:** This is the only symbol type enabled by default.

**Options:** 0 = Disabled                      **1 = Enabled**

## ECC 000

**Definition:** When enabled, will decode ECC 000 symbols.

**Serial Cmd:** <**K479,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,ECC 100 status,ECC 140 status,ECC 120 status,ECC 130 status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## ECC 050

**Definition:** When enabled, will decode ECC 050 symbols.

**Serial Cmd:** <**K479,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,ECC 100 status,ECC 140 status,ECC 120 status,ECC 130 status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## ECC 080

**Definition:** When enabled, will decode ECC 080 symbols.

**Serial Cmd:** <**K479**,ECC 200 status,ECC 000 status,ECC 050 status,**ECC 080 status**,  
ECC 100 status,ECC 140 status,ECC 120 status,ECC 130 status>

**Default:** **Disabled**

**Options:** **0 = Disabled**                    1 = Enabled

## ECC 100

**Definition:** When enabled, will decode ECC 100 symbols.

**Serial Cmd:** <**K479**,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,  
**ECC 100 status**,ECC 140 status,ECC 120 status,ECC 130 status>

**Default:** **Disabled**

**Options:** **0 = Disabled**                    1 = Enabled

## ECC 140

**Definition:** When enabled, will decode ECC 140 symbols.

**Serial Cmd:** <**K479**,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,  
ECC 100 status,**ECC 140 status**,ECC 120 status,ECC 130 status>

**Default:** **Disabled**

**Options:** **0 = Disabled**                    1 = Enabled

## ECC 120

**Definition:** When enabled, will decode ECC 120 symbols.

**Serial Cmd:** <**K479**,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,  
ECC 100 status,ECC 140 status,**ECC 120 status**,ECC 130 status>

**Default:** **Disabled**

**Options:** **0 = Disabled**                    1 = Enabled

## ECC 130

**Definition:** When enabled, will decode ECC 130 symbols.

**Serial Cmd:** <**K479**,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,  
ECC 100 status,ECC 140 status,ECC 120 status,**ECC 130 status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                    1 = Enabled

## QR Code

*Usage:* Widely implemented in the automotive industry in Japan and throughout their worldwide supply chain.

*Definition:* QR Code is capable of handling numeric, alphanumeric, and byte data as well as kanji and kana characters. Up to 7,366 characters (numeric data) can be encoded using this symbol. Therefore, less space is required to encode the same amount of data in a QR Code symbol than in a conventional symbol, lowering the cost of labelling.

Three Position Detection Patterns in the symbol make omnidirectional, ultra-fast reading possible.

QR Code has error protection capability. Data can often be restored even if a part of the symbol has become dirty or damaged.

*Serial Cmd:* <**K480,status**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

## Code 39

- Usage:** **Code 39** is considered the standard non-retail 1D symbology.
- Definition:** An alphanumeric symbology with unique start/stop code patterns, composed of 9 black and white elements per character, of which 3 are wide.
- Serial Cmd:** *<K470,status,check character status,check character output status,large intercharacter gap,fixed symbol length status,fixed symbol length,full ASCII set>*
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Check Character Status (Code 39)

- Serial Cmd:** *<K470,status,check character status,check character output status,large intercharacter gap,fixed symbol length status,fixed symbol length,full ASCII set>*
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Check Character Output Status (Code 39)

- Usage:** **Check Character Output Status**, added to the symbol, provides additional data security.
- Definition:** When enabled, the check character character is read and compared along with the symbol data. When disabled, symbol data is sent without the check character.
- Note:** With **Check Character Output Status** and an **External** or **Serial** trigger option enabled, an invalid check character calculation will cause a No Read message to be transmitted at the end of the read cycle.
- Serial Cmd:** *<K470,status,check character status,check character output status,large intercharacter gap,fixed symbol length status,fixed symbol length,full ASCII set>*
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

## Large Intercharacter Gap (Code 39)

**Usage:** **Large Intercharacter Gap** is helpful for reading symbols that are printed out of specification.

**Caution:** Do not use **Large Intercharacter Gap** with **Narrow Margins** enabled, because a large intercharacter gap (over 3x) could cause a narrow margin (5x) to be interpreted as an intercharacter gap.

**Definition:** When enabled, the imager can read symbols with gaps between symbol characters that exceed three times (3x) the narrow element width.

**Serial Cmd:** <K470,status,check character status,check character output status,**large intercharacter gap**,fixed symbol length status,fixed symbol length,full ASCII set>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Fixed Symbol Length Status (Code 39)

**Definition:** When enabled, the imager will check the symbol length against the symbol length field. If disabled, any length will be considered valid.

**Serial Cmd:** <K470,status,check character status,check character output status,**large intercharacter gap**,**fixed symbol length status**,fixed symbol length,full ASCII set>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Fixed Symbol Length (Code 39)

**Usage:** **Fixed Symbol Length** helps prevent truncations and increases data integrity by ensuring that only one symbol length will be accepted.

**Definition:** Specifies the exact number of characters that the imager will recognize (this does not include start and stop and check character characters). The imager ignores any symbology that does not match the specified length.

**Serial Cmd:** <K470,status,check character status,check character output status,**large intercharacter gap**,fixed symbol length status,**fixed symbol length**,full ASCII set>

**Default:** **10**

**Options:** 1 to 64

## Full ASCII Set (Code 39)

**Usage:** Must be enabled when reading characters outside the standard character set (0-9, A-Z, etc.)

The user must know in advance whether or not to use the **Full ASCII Set** option. Since **Full ASCII Set** requires two code words to encode one character, it is less efficient.

**Definition:** Standard Code 39 encodes 43 characters; zero through nine, capital "A" through capital "Z", minus symbol, plus symbol, forward slash, space, decimal point, dollar sign, and percent symbol. When **Full ASCII Set** is enabled, the imager can read the full ASCII character set, from 0 to 255.

**Serial Cmd:** *<K470,status,check character status,check character output status,large intercharacter gap,fixed symbol length status,fixed symbol length,full ASCII set>*

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Code 128 / EAN-128

- Usage:** **Code 128** is a smaller symbology useful in applications with tight spots and high security needs.
- Definition:** A very dense alphanumeric symbology. It encodes all 128 ASCII characters, it is continuous, has variable length, and uses multiple element widths measured edge to edge.
- Serial Cmd:** *<K474,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding>*
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Fixed Symbol Length Status (Code 128 / EAN-128)

- Definition:** When enabled, the imager will check the symbol length against the symbol length field. If disabled, any length will be considered a valid symbol.
- Serial Cmd:** *<K474,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding>*
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Fixed Symbol Length (Code 128 / EAN-128)

- Usage:** **Fixed Symbol Length** helps prevent truncations and increases data integrity by ensuring that only one symbol length will be accepted.
- Definition:** This specifies the exact number of characters that the imager will recognize (this does not include start, stop, and check character characters). The imager ignores any symbol not having the specified length.
- Serial Cmd:** *<K474,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding>*
- Default:** **10**
- Options:** 1 to 64

## EAN-128 Status (Code 128 / EAN-128)

**Definition:** When this field is disabled, the imager will not check any Code 128 labels for conformance to EAN requirements, or perform any special formatting. When enabled, the imager can read symbols with or without a function 1 character in the first position. If a symbol has a function 1 character in the first position, it must conform to EAN format. Symbols that conform to EAN format will also be subject to the special output formatting options available in this command.

**Note:** Code 128 status must be enabled for EAN status to be active.

If EAN status is required, the imager will only decode symbols that have a function 1 character in the first position and that conform to EAN format. All symbols read will be subject to the special output formatting options available in this command.

**Note:** Code 128 status must be enabled for EAN status to be active.

**Serial Cmd:** <**K474**,status,fixed symbol length status,fixed symbol length,**EAN-128 status**,output format,application record separator status,application record separator character,application record brackets,application record padding>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled                      2 = Required

## Output Format (Code 128 / EAN-128)

**Definition:** In **Standard**, the imager will not apply special EAN output formatting options.

In **Application**, the imager will apply the special EAN output formatting options to decoded EAN-conforming symbols.

**Serial Cmd:** <**K474**,status,fixed symbol length status,fixed symbol length,EAN-128 status,**output format**,application record separator status,application record separator character,application record brackets,application record padding>

**Default:** **Standard**

**Options:** **0 = Standard**                      1 = Application

## Application Record Separator Status (Code 128 / EAN-128)

**Definition:** When enabled, an EAN separator will be inserted into the output between fields whenever an EAN-conforming symbol is decoded and EAN output formatting applies.

**Serial Cmd:** <**K474**,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,**application record separator status**,application record separator character,application record brackets,application record padding>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Application Record Separator Character (Code 128 / EAN-128)

**Definition:** This is an ASCII character that serves as an EAN separator in formatted EAN output.

**Serial Cmd:** <K474,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding>

**Default:** ,

**Options:** Any ASCII character (7 bit)

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K474h,,,,,,3C>

For >: <K474h,,,,,,3E>

For , : <K474h,,,,,,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Application Record Brackets (Code 128 / EAN-128)

**Definition:** If an EAN-conforming symbol is decoded and EAN formatting applies, this feature places bracket characters around the application identifiers in the formatted output.

**Serial Cmd:** <K474,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding>

**Default:** Disabled

**Options:** 0 = Disabled                      1 = Enabled

## Application Record Padding (Code 128 / EAN-128)

**Definition:** This feature causes the imager to pad variable-length application fields with leading zeroes. This is not done for the last field of a symbol.

**Serial Cmd:** <K474,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding>

**Default:** Enabled

**Options:** 0 = Disabled                      1 = Enabled

## BC412

- Usage:** Widely used in semiconductor manufacturing. Particularly useful where speed, accuracy, and ease of printing are required.
- Definition:** BC412 (Binary Code 412), a proprietary IBM symbology since 1988, is an alphanumeric symbol with a set of 35 characters, each encoded by a set of 4 bars in 12 module positions. All bars have a single width; it is the presence (1) or absence (0) of bars in each of the twelve module positions that make BC412 binary.  
This symbology is also bi-directional and self-clocking, with a start character and a stop character.
- Serial Cmd:** <**K481,status**,*check character output*,*fixed symbol length status*,*fixed symbol length*>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Check Character Output (BC412)

- Usage:** **Check Character Output**, added to the symbol, provides additional security.
- Definition:** When enabled, the check character character is read and compared along with the symbol data. When disabled, symbol data is sent without the check character.
- Serial Cmd:** <**K481,status**,*check character output*,*fixed symbol length status*,*fixed symbol length*>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Fixed Symbol Length Status (BC412)

- Definition:** When enabled, the imager will check the symbol length against the symbol length field. If disabled, any length will be considered valid.
- Serial Cmd:** <**K481,status**,*check character output*,**fixed symbol length status**,*fixed symbol length*>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Fixed Symbol Length (BC412)

- Definition:** When enabled, the check character character is read and compared along with the symbol data. When disabled, symbol data is sent without the check character.
- Serial Cmd:** <**K481,status**,*check character output*,*fixed symbol length status*,**fixed symbol length**>
- Default:** **10**
- Options:** 1 to 64

## Interleaved 2 of 5

**Usage:** I-2/5 has been popular because it is the most dense symbology for printing numeric characters less than 10 characters in length; however, Microscan does not recommend this symbology for any new applications because of inherent problems such as truncation.

**Definition:** A dense, continuous, self-checking, numeric symbology. Characters are paired together so that each character has five elements, two wide and three narrow, representing numbers 0 through 9, with the bars representing the first character and the interleaved spaces representing the second character. (A check character is highly recommended).

**Important:** You must set Symbol Length in order to decode I-2/5 symbols, unless **Range Mode** is enabled.

**Serial Cmd:** <**K472,status,check character status,check character output status,symbol length #1,symbol length #2,guard bar status,range mode status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

### Check Character Status (Interleaved 2 of 5)

**Usage:** This option is not typically used, but it can be enabled for additional security in applications where the host requires redundant check character verification.

**Definition:** An error correcting routine in which the check character character is added.

**Serial Cmd:** <**K472,status,check character status,check character output status,symbol length #1,symbol length #2,guard bar status,range mode status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

### Check Character Output Status (Interleaved 2 of 5)

**Definition:** When enabled, a check character character is sent along with the symbol data for added data security.

**Serial Cmd:** <**K472,status,check character status,check character output status,symbol length #1,symbol length #2,guard bar status,range mode status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Symbol Length #1 (Interleaved 2 of 5)

**Usage:** Useful in applications where 1 2/5 symbols of a specific length are required.

**Definition:** The **Symbol Length # 1** field is one of two fields against which the decoded symbol is compared before accepting it as valid or rejecting it.

**Serial Cmd:** <K472,status,check character status,check character output,**symbol length #1**,symbol length #2,guard bar status,range mode status>

**Default:** **10**

**Options:** 0 to 64, even only.

**Important:** If **Range Mode** is disabled, the length of the symbol must match either **Symbol Length # 1** or **Symbol Length # 2** to be considered a valid symbol.

If **Range Mode** is enabled, **Symbol Length # 1** and **Symbol Length # 2** form a range into which the length of the symbol must fall to be considered valid.

## Symbol Length #2 (Interleaved 2 of 5)

**Usage:** Useful in applications where 1 2/5 symbols of a specific length are required.

**Definition:** The **Symbol Length # 2** field is one of two fields against which the decoded symbol is compared before accepting it as valid or rejecting it.

**Serial Cmd:** <K472,status,check character status,check character output,symbol length #1,**symbol length #2**,guard bar status,range mode status>

**Default:** **6**

**Options:** 0 to 64, even only.

**Important:** If **Range Mode** is disabled, the length of the symbol must match either **Symbol Length # 2** or **Symbol Length # 1** to be considered a valid symbol.

If **Range Mode** is enabled, **Symbol Length # 2** and **Symbol Length # 1** form a range into which the length of the symbol must fall to be considered valid.

## Guard Bar Status (Interleaved 2 of 5)

**Note:** Whenever **Guard Bar** is enabled, the presence of guard bars (also called “bearer bars”) is required for decoding to take place.

**Usage:** Useful when I-2/5 multisymbols are enabled to prevent false data output. This typically occurs with highly tilted or skewed symbols.

**Definition:** A guard bar is a heavy bar, at least twice the width of the wide bar, surrounding the printed I-2/5 symbol and helping to prevent false reads.

**Serial Cmd:** <K472,status,check character status,check character output,symbol length #1,symbol length #2,guard bar status,range mode status>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Range Mode Status (Interleaved 2 of 5)

**Usage:** Useful in applications where I 2/5 symbols of a specific length are required.

**Definition:** When **Range Mode** is disabled, the imager checks the value of the symbol length against the values set in **Symbol Length # 1** and **Symbol Length # 2**. If the symbol length does not match either of the preset values, then it is rejected as invalid.

When **Range Mode** is enabled, **Symbol Length # 1** and **Symbol Length # 2** are combined to form a range of valid symbol lengths. Any symbol length that does not fall into this range is rejected as an invalid symbol. Either of the preset symbol length values in the **Symbol Length # 1** and **Symbol Length # 2** fields can form the start or end of the range.

**Serial Cmd:** <K472,status,check character status,check character output,symbol length #1,symbol length #2,guard bar status,range mode status>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Code 93

- Usage:** Sometimes used in clinical applications.
- Definition:** Code 93 is a variable-length, continuous symbology employing four element widths. Each Code 93 character has nine modules that may be either black or white. Each character contains three bars and three spaces.
- Serial Cmd:** <**K475,status,fixed symbol length status,symbol length**>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### **Fixed Symbol Length Status (Code 93)**

- Definition:** When disabled, the imager will accept any Code 93 symbol provided is doesn't exceed the system's maximum capabilities.  
When enabled, the imager will reject any Code 93 symbol that doesn't match the fixed symbol length.
- Serial Cmd:** <**K475,status,fixed symbol length status,symbol length**>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### **Symbol Length (Code 93)**

- Definition:** This is the symbol length value against which all Code 93 symbols will be compared.
- Serial Cmd:** <**K475,status,fixed symbol length status,symbol length**>
- Default:** **10**
- Options:** 1 to 64

## Codabar

**Usage:** Used in photo-finishing and library applications. Previously used in medical applications, but not typically used in newer medical applications.

**Definition:** Codabar is a 16-bit character set (0 through 9, and the characters \$, :, /, ., +, and -) with start/stop codes and at least two distinctly different bar widths.

**Serial Cmd:** <**K471,status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,symbol length,check character type,check character output**>

**Default:** **Disabled**

**Options:** **0 = Disabled** 1 = Enabled

### Start / Stop Match (Codabar)

**Definition:** When disabled, the imager will decode Codabar symbols whether or not the start and stop characters are the same.

When enabled, the imager will not decode Codabar symbols unless the start and stop characters are the same.

**Serial Cmd:** <**K471,status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,symbol length,check character type,check character output**>

**Default:** **Enabled**

**Options:** 0 = Disabled **1 = Enabled**

### Start / Stop Output (Codabar)

**Definition:** When disabled, the start and stop characters will *not* be present in the data output of the decoded symbol.

When enabled, the start and stop characters *will* be present in the data output of the decoded symbol.

**Note:** Because the start and stop characters are included as part of the data, the characters must be included as part of the length in a fixed length mode of operation.

**Serial Cmd:** <**K471,status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,symbol length,check character type,check character output**>

**Default:** **Enabled**

**Options:** 0 = Disabled **1 = Enabled**

## Large Intercharacter Gap (Codabar)

**Definition:** When disabled, the spaces between characters, or the “intercharacter gap”, are ignored during the decode process.

**Note:** If the intercharacter space is large enough to be considered a margin, the symbol will not decode, regardless of this parameter’s setting.

**Serial Cmd:** <**K471**,status,start/stop match,start/stop output,**large intercharacter gap**,fixed symbol length status,symbol length,check character type,check character output>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Fixed Symbol Length Status (Codabar)

**Definition:** When disabled, the imager will accept any Codabar symbol provided it doesn’t exceed the system’s maximum capabilities.

When enabled, the imager will reject any Codabar symbol that doesn’t match the fixed length.

**Serial Cmd:** <**K471**,status,start/stop match,start/stop output,large intercharacter gap,**fixed symbol length status**,symbol length,check character type,check character output>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Symbol Length (Codabar)

**Definition:** This is the value against which all Codabar symbol lengths will be compared.

**Serial Cmd:** <**K471**,status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,**symbol length**,check character type,check character output>

**Default:** **10**

**Options:** 1 to 64

## Check Character Type (Codabar)

**Definition:** When disabled, the imager will not perform any character checking calculations on decoded Codabar symbols.

When set to **Mod 16**, the imager will perform a modulus 16 check character calculation on the symbol. If the symbol does not pass this calculation, it will not be decoded.

When set to **NW7**, The imager will perform an NW7 modulus 11 check character calculation on the symbol. If the symbol does not pass this calculation, it will not be decoded.

When set to **Both**, the imager will perform both the Mod 16 and NW7 modulus 11 check character calculations on the symbol. If the symbol does not pass either calculation, it will not be decoded.

**Serial Cmd:** <**K471**,status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,symbol length,**check character type**,check character output>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Mod 16                      2 = NW7 (Mod 11)  
3 = Mod 16 and NW7

## Check Character Output (Codabar)

**Definition:** When this field is disabled and a check character calculation is enabled, the imager will strip the verified check character from the symbol data output.

This condition must be accounted for if a fixed length is also being used.

When enabled, the imager will output the check character as part of the symbol data. This condition must be accounted for if a fixed length is also being used.

**Serial Cmd:** <**K471**,status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,symbol length,check character type,**check character output**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## UPC / EAN

- Usage:** Used primarily in point-of-sale applications in the retail industry. It is commonly used with Microscan readers in applications in combination with **Matchcode** when there is a need to verify that the right product is being placed in the right packaging.
- Definition:** **UPC** (Universal Product Code) is a fixed length, numeric, continuous symbology. UPC can have two- or five-digit supplemental bar code data following the normal code. The UPC Version A (UPC, A) symbol is used to encode a 12 digit number. The first digit is the number system character, the next five are the manufacturer number, the next five are the product number, and the last digit is the checksum character.  
When enabled, the imager will read UPC Version A and UPC Version E only.
- Serial Cmd:** <**K473**,**UPC status**,**EAN status**,**supplementals status**,**separator status**,**separator character**,**supplemental type**,**format UPC-E as UPC-A**>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

## EAN Status

- Usage:** **EAN** is the European version of the UPC symbology and is used in European market applications.  
**Note:** **UPC** must be enabled for **EAN** to take effect.
- Definition:** EAN is a subset of UPC. When enabled, the imager will read UPC Version A, UPC Version E, EAN 13, and EAN 8. It also appends a leading zero to UPC Version A symbol information and transmits 13 digits. If transmitting 13 digits when reading UPC Version A symbols is not desired, disable EAN.  
**Note:** The extra character identifies the country of origin.
- Serial Cmd:** <**K473**,**UPC status**,**EAN status**,**supplementals status**,**separator status**,**separator character**,**supplemental type**,**format UPC-E as UPC-A**>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

## Supplementals Status (UPC / EAN)

**Usage:** Reads **Supplementals** typically used in publications and documentation.

**Definition:** A supplemental is a 2 to 5 digit symbol appended to the main symbol. When set to **Enabled** or **Required**, the imager reads supplemental code data that has been appended to the standard UPC or EAN codes.

**Serial Cmd:** <**K473**,UPC status,EAN status,**supplementals status**,separator status,separator character,supplemental type,format UPC-E as UPC-A>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled                      2 = Required

### Disabled

UPC **Supplementals** will not be decoded.

### Enabled

When enabled, the imager will try to decode a main and a supplemental. However, if a supplemental is not decoded, the main will be sent by itself at the end of the read cycle.

### Required

When set to **Required**, both the main and the supplemental symbols must be read or a single No Read condition results.

For example, if **Supplementals** is set to **Required**, **Separator** is enabled, and an asterisk is defined as the UPC separator character. Then the data is displayed as:

MAIN \* SUPPLEMENTAL.

**Note:** Under no circumstances will the supplemental symbol data be sent without a main symbol.

**Note:** If additional symbols—other than the main or supplemental—will be read in the same read cycle, **Number of Symbols** should be set accordingly.

## Separator Status (UPC / EAN)

**Usage:** Allows users to distinguish between the main and **Supplemental** symbols.

**Definition:** A character can be inserted between the standard UPC or EAN symbology and the supplemental symbology when **Supplementals** is set to **Enabled** or **Required**.

**Serial Cmd:** <**K473**,UPC status,EAN status,supplementals status,**separator status**,separator character,supplemental type,format UPC-E as UPC-A>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Separator Character (UPC / EAN)

**Note:** If **Separator Character** has been changed to any other character and you wish to redefine the separator as a comma, you will need to use **ESP**.

**Usage:** As required by the application.

**Definition:** Allows the user to change the separator character from a comma to a new character.

**Serial Cmd:** <**K473**,UPC status,EAN status,supplementals status,separator status,  
**separator character**,supplemental type,format UPC-E as UPC-A>

**Default:** , (comma)

**Options:** Any ASCII character

**Note:** Whenever **Separator Character** is defined as a comma ( , ) sending a <**K473,s?**> command will return the current settings, including the separator character comma which appears after the separator status comma.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <**K473h,,,,,3C**>

For >: <**K473h,,,,,3E**>

For , : <**K473h,,,,,2C**>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Supplemental Type (UPC / EAN)

*Usage:* As required by symbology used in application.

*Definition:* Allows the user to select 2 character or 5 character supplements, or both.

*Serial Cmd:* <**K473**,UPC status,EAN status,supplementals status,separator status,separator character,**supplemental type**,format UPC-E as UPC-A>

*Default:* **Both**

*Options:* **0 = Both**                      1 = 2 characters only                      2 = 5 characters only

### Both

Either 2 character or 5 character supplementals will be considered valid.

### 2 Characters Only

Only two character supplementals will be considered valid.

### 5 Characters Only

Only five character supplementals will be considered valid.

## Format UPC-E as UPC-A (UPC / EAN)

*Definition:* When disabled, the imager will output the version E symbols in their encoded 6-character format.

When enabled, the imager will format the symbol as either a 12-character UPC-A symbol or an EAN-13 symbol, depending on the state of the EAN status parameter. This formatting reverses the zero suppression that is used to generate the symbol in the UPC specification.

*Serial Cmd:* <**K473**,UPC status,EAN status,supplementals status,separator status,separator character,supplemental type,**format UPC-E as UPC-A**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

## Pharmacode

- Usage:** Used mostly with packaging for the pharmaceuticals industry.
- Definition:** Encodes up to five different numbers, each with its own color, which may be entered in decimal or “binary” format with a 1 represented by a thick bar and a 0 represented by a thin bar. Bar width is independent of height.  
In decimal format, each part can be up to 999,999.  
In binary format, each input can have up to 19 ones and zeros.  
**Important:** When Pharmacode is enabled, other linear symbologies will not decode properly. Disable Pharmacode before reading other linear symbologies.
- Serial Cmd:** *<K477,status,fixed symbol length status,fixed symbol length,minimum number of bars,bar width status,direction,fixed threshold value>*
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Fixed Symbol Length Status (Pharmacode)

- Definition:** When enabled, the imager will check the symbol length against the symbol length field. If disabled, any length will be considered valid.
- Serial Cmd:** *<K477,status,fixed symbol length status,fixed symbol length,minimum number of bars,bar width status,direction,fixed threshold value>*
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

### Fixed Symbol Length (Pharmacode)

- Definition:** Specifies the exact number of bars that must be present for the imager to recognize and decode the Pharmacode symbol.
- Serial Cmd:** *<K477,status,fixed symbol length status,fixed symbol length,minimum number of bars,bar width status,direction,fixed threshold value>*
- Default:** **5**
- Options:** 1 to 16

### Minimum Number of Bars (Pharmacode)

- Definition:** Sets the minimum number of bars that a Pharmacode symbol must have to be considered valid.
- Serial Cmd:** *<K477,status,fixed symbol length status,fixed symbol length,minimum number of bars,bar width status,direction,fixed threshold value>*
- Default:** **2**
- Options:** 1 to 16

## Bar Width Status (Pharmacode)

**Definition:** If set to **Mixed**, the imager will autodiscriminate between narrow bars and wide bars. If set to **All Narrow**, all bars will be considered as narrow bars. If set to **All Wide**, all bars will be considered as wide bars. If set to **Fixed Threshold**, it will use the fixed threshold value to determine whether the bars are narrow or wide. The **Bar Width Status** setting will be ignored when the imager is able to tell the difference between the narrow and the wide bars.

**Serial Cmd:** <**K477**,status,fixed symbol length status,fixed symbol length,minimum number of bars,**bar width status**,direction,fixed threshold value>

**Default:** **Mixed**

**Options:** **0 = Mixed**  
1 = All Narrow  
2 = All Wide  
3 = Fixed Threshold

## Direction (Pharmacode)

**Definition:** Specifies the direction in which a symbol can be read.

**Serial Cmd:** <**K477**,status,fixed symbol length status,fixed symbol length,minimum number of bars,bar width status,**direction**,fixed threshold value>

**Default:** **Forward**

**Options:** **0 = Forward**                      1 = Reverse

## Fixed Threshold Value (Pharmacode)

**Definition:** Used when **Bar Width Status** is set to **Fixed Threshold**. Defines the minimum difference in pixels that will distinguish a narrow bar from a wide bar.

**Serial Cmd:** <**K477**,status,fixed symbol length status,fixed symbol length,minimum number of bars,bar width status,direction,**fixed threshold value**>

**Default:** **10**

**Options:** 1 to 65535

## GS1 DataBar (RSS)

**Note:** GS1 DataBar symbologies were previously known as “Reduced Space Symbology”, or “RSS”.

### ***DataBar Expanded (RSS Expanded)***

**Note:** DataBar Expanded was previously known as “RSS Expanded”.

- Usage:** Used to encode primary and supplementary data in retail point-of-sale and other applications.
- Definition:** DataBar Expanded is a variable length symbology that can encode supplementary information in addition to the 14-digit EAN item identification number and is capable of encoding up to 74 numeric or 41 alphabetic characters.
- Serial Cmd:** **<K484,status,fixed symbol length status,fixed symbol length>**
- Default:** **Disabled**
- Options:** **0 = Disabled**    1 = Enabled (non-stacked)    2 = Enabled (stacked and non-stacked)

Where appropriate, use 1 (non-stacked) for better performance over 2 (stacked and non-stacked).

### **Fixed Symbol Length Status (DataBar Expanded)**

- Definition:** When enabled, the imager will check the symbol length against the symbol length field, minus the embedded check character. If disabled, any length would be considered valid.
- Serial Cmd:** **<K484,status,fixed symbol length status,fixed symbol length>**
- Default:** **Disabled**
- Options:** **0 = Disabled**    1 = Enabled

### **Fixed Symbol Length (DataBar Expanded)**

- Usage:** **Fixed Symbol Length** helps prevent truncations and increases data integrity by ensuring that only one symbol length will be accepted.
- Definition:** Specifies the exact number of characters that the imager will recognize (this does not include start, stop, and check character characters). The imager ignores any symbol not having the specified length.
- Serial Cmd:** **<K484,status,fixed symbol length status,fixed symbol length>**
- Default:** **14**
- Options:** 1 to 74

## DataBar Limited (RSS Limited)

**Note:** DataBar Limited was previously known as “RSS Limited”.

*Usage:* DataBar Limited is best suited to laser and CCD readers. It is not recommended for omnidirectional slot scanners.

*Definition:* Encodes a smaller 14-digit symbol (74 modules wide) that is not omnidirectional.

*Serial Cmd:* <K483,status>

*Default:* **Disabled**

*Options:* **0 = Disabled**      1 = Enabled

## DataBar-14 (RSS-14)

**Note:** DataBar-14 was previously known as “RSS-14”.

*Usage:* Used in the grocery, retail, and prescription drug industries where 14-digit EAN item identification may be needed.

*Definition:* DataBar-14 (Reduced Space Symbology) is a fixed symbol length symbology that encodes 14 digits, including a 1-digit indicator. DataBar-14 is 96 modules wide. It can be stacked in two rows, it can read omnidirectionally if printed in full height, or horizontally if height-truncated for small marking.

*Serial Cmd:* <K482,status>

*Default:* **Disabled**

*Options:* **0 = Disabled**      1 = Enabled (non-stacked)      2 = Enabled (stacked; decode both stacked and non-stacked)

**Note:** Where appropriate, use 1 (non-stacked) for better performance over 2 (stacked; decode both stacked and non-stacked).

# PDF417

**Usage:** Used in applications where a large amount of information (over 32 characters) needs to be encoded within a symbol, typically where the symbol is transported from one facility to another. For example, an automobile assembly line might use a single symbol with multiple fields of information that will be read at several stations along the way, without reference to a database.

**Definition:** A two-dimensional, multi-row (3 to 90), continuous, variable length symbology that has high data capacity for storing up to 2,700 numeric characters, 1800 printable ASCII characters, or 1100 binary characters per symbol. Each symbol character consists of 4 bars and 4 spaces in a 17-module structure.

**Serial Cmd:** `<K476,status,[unused],fixed symbol length status,fixed symbol length,[unused],codeword collection>`

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

**Note:** Sending `<a1>` will cause PDF417 data to be prefaced with information consisting of ECC level (ECC Level *n*), number of rows (*n* Rows), number of columns (*n* Columns), number of informative code words (*n* Info Code Words) and the number of data characters (*n* Data Characters). This feature can be disabled by re-sending `<a1>`.

## Fixed Symbol Length Status (PDF417)

**Serial Cmd:** `<K476,status,[unused],fixed symbol length status,fixed symbol length,[unused],codeword collection>`

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Fixed Symbol Length (PDF417)

**Usage:** Used to increase data integrity by ensuring that only one symbol length will be accepted.

**Definition:** When enabled, the PDF symbol must contain the same number of characters as the symbol length setting before it can be considered a Good Read. The imager will ignore any symbol not having the specified length.

**Serial Cmd:** `<K476,status,[unused],fixed symbol length status,fixed symbol length,[unused],codeword collection>`

**Default:** **10**

**Options:** 1 to 2710

**Note:** **Fixed Symbol Length Status** must be enabled for **Fixed Symbol Length** to take effect.

## **Codeword Collection (PDF417)**

*Usage:* **Multiple Codeword Collection** is useful in applications where portions of subsequent images can be read and pieced together so that no opportunity or time is lost to assemble codewords for decoding.

*Definition:* When set to **Multiple**, PDF codewords are collected from multiple images and assembled throughout the read cycle until the read cycle ends or the symbol is fully decoded. It is important to note that when this feature is enabled, only one PDF symbol should be presented to the imager per read cycle.

*Serial Cmd:* **<K476,status,[unused],fixed symbol length status,fixed symbol length,[unused],codeword collection>**

*Default:* **Single Image**

*Options:* **0 = Single Image**      1 = Multiple Image

## MicroPDF417

- Usage:** Used for labelling small items that need large data capacity.
- Definition:** A variant of PDF417, a very efficient and compact stacked symbology that can encode up to 250 alphanumeric characters or 366 numeric characters per symbol.
- Serial Cmd:** <**K485,status**,[unused],fixed symbol length status,fixed symbol length>
- Default:** **Disabled**
- Options:** **0 = Disabled**      1 = Enabled

### **Fixed Symbol Length Status (MicroPDF417)**

- Serial Cmd:** <**K485,status**,[unused],**fixed symbol length status**,fixed symbol length>
- Default:** **Disabled**
- Options:** **0 = Disabled**      1 = Enabled

### **Fixed Symbol Length (MicroPDF417)**

- Usage:** Used to increase data integrity by ensuring that only one symbol length will be accepted.
- Definition:** When enabled, the MicroPDF417 symbol must contain the same number of characters as the symbol length setting before it can be considered a Good Read. The imager will ignore any symbol not having the specified length.
- Serial Cmd:** <**K485,status**,[unused],fixed symbol length status,fixed symbol length>
- Default:** **10**
- Options:** 1 to 366

**Note:** **Fixed Symbol Length Status** must be enabled for **Fixed Symbol Length** to take effect.

# Composite

When set to **Enabled** or **Required**, will attempt to decode the composite component of a linear symbol. The linear symbol can be DataBar-14, DataBar Expanded, DataBar Limited, EAN-128, UPC-A, EAN-13, EAN-8, and UPC-E.

*Usage:* Allows reading by both linear and 2D readers.

*Definition:* Combines 2D and linear width modulated symbology on the same symbol where different messages can be read by each reader type.

*Serial Cmd:* <**K453,mode,separator status,separator**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled                      2 = Required

## **Enabled**

If set to **Enabled**, the imager only decodes the linear component, and it will only output the linear component.

## **Required**

If set to **Required**, the imager must decode both the linear and the composite components; otherwise it outputs a No Read.

## **Separator Status (Composite)**

*Usage:* Allows the user to distinguish between the main and **Supplemental** symbols.

*Definition:* Separates the linear and the composite component.

*Serial Cmd:* <**K453,mode,separator status,separator**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

## **Separator Character (Composite)**

*Usage:* As required by the application.

*Definition:* Allows the user to change the separator character from a comma to a new character.

*Serial Cmd:* <**K453,mode,separator status,separator**>

*Default:* **, (comma)**

*Options:* Any ASCII character

**Important:** The ASCII characters **<**, **>**, and **,** can only be entered as hex pairs:

For **<**: <**K453h,,,3C**>

For **>**: <**K453h,,,3E**>

For **,**: <**K453h,,,2C**>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

# Narrow Margins / Symbology Identifier

## Narrow Margins

**Usage:** Used when the leading and trailing edges of the symbols are smaller than the standard margin or other objects encroach into the margins.

**Definition:** Allows the imager to read 1D symbols with quiet zones less than 8 times the width of the narrow bar element. "Quiet zone" is the space at the leading and trailing ends of a symbol. When Narrow Margins is set to **Enabled**, the imager uses a 5x margin requirement for standard linear symbols.

**Serial Cmd:** <**K450,narrow margins,symbology identifier status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

**Note:** Do not use **Narrow Margins** with **Large Intercharacter Gap Enabled** with Code 39.

## Symbology Identifier

**Definition:** Symbology ID is an ISO/IEC 16022 standard prefix set of characters that identifies the symbol type.

When enabled, the imager analyzes and identifies the symbology and adds a three character identifying prefix to the data:

- ] (closed bracket character) indicating the presence of a symbology identifier.
- **A** = Code 39
- **C** = Code 128
- **E** = UPC/EAN
- **F** = Codabar
- **G** = Code 93
- **I** = Interleaved 2 of 5
- **L** = PDF417
- **Q** = QR Code
- **b** = BC412
- **d** = Data Matrix
- **e** = GS1 DataBar (RSS)
- **p** = Pharmacode
- Modifier

*Example:* ]**d** indicates a Data Matrix symbol.

**Serial Cmd:** <**K450,narrow margins,symbology identifier status**>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Explanation of Modifiers for Code 39, Codabar, and Interleaved 2/5

- For Code 39, Codabar, and Interleaved 2 of 5, the modifier indicates **Check Character** and **Check Character Output** status.
- For Code 39 only, Full ASCII must be enabled to see modifiers **4**, **5**, and **7**.

<b>Modifier</b>	<b>Check Character</b>	<b>Check Character Output</b>	<b>Full ASCII conversion performed (Code 39 only)</b>
<b>0</b>	Disabled	N/A	No
<b>1</b>	Enabled	Enabled	No
<b>3</b>	Enabled	Disabled	No
<b>4</b>	Disabled	N/A	Yes
<b>5</b>	Enabled	Enabled	Yes
<b>7</b>	Enabled	Disabled	Yes

**Example: JA5** indicates a **Code 39** symbol with **Check Character** and **Check Character Output** enabled and Full ASCII conversion performed.

## Explanation of Modifiers for Code 128 and QR Code

- For Code 128, a **1** indicates EAN-128; otherwise the modifier is **0**.
- For QR Code, a **0** indicates Model 1; a **1** indicates Model 2.
- For all other symbologies, the modifier is **0**.

# 8 I/O Parameters

## Contents

I/O Parameters by ESP .....	8-2
I/O Parameters Serial Commands .....	8-3
Symbol Data Output .....	8-5
No Read Message.....	8-8
Bad Symbol Message .....	8-10
No Symbol Message .....	8-10
1D / Stacked Symbology Qualification .....	8-11
2D Symbology Qualification .....	8-12
Read Duration Output .....	8-18
Output Indicators .....	8-19
Beeper .....	8-23
LED Configuration .....	8-24
Serial Verification .....	8-25
EZ Button .....	8-27
EZ Button Modes.....	8-29
Configurable Output 1 .....	8-31
Trend Analysis Output 1 .....	8-34
ISO/IEC 16022 Symbol Quality Output 1 .....	8-37
Diagnostics Output 1 .....	8-40
Tube/Cap Detection Output 1.....	8-41
Configurable Output 2 .....	8-43
Trend Analysis Output 2.....	8-43
ISO/IEC 16022 Symbol Quality Output 2 .....	8-43
Diagnostics Output 2 .....	8-43
Tube/Cap Detection Output 2.....	8-44
Configurable Output 3 .....	8-45
Trend Analysis Output 3.....	8-45
ISO/IEC 16022 Symbol Quality Output 3 .....	8-45
Diagnostics Output 3 .....	8-45
Tube/Cap Detection Output 3.....	8-46
Frame Information .....	8-47
Image Output.....	8-48
Database Identifier Output .....	8-51
Quality Output .....	8-52
Power-On/Reset Counts .....	8-53
Time Since Reset.....	8-54
Service Message.....	8-55
EZ Trax Output.....	8-56

This section includes instructions on setting up conditions for changing input/output electrical transitions for control of the imager's internal and external devices.

# I/O Parameters by ESP



Click the **Parameters** button and then the **I/O** tab.

Parameters	ESP Values
[-] I/O Parameters	
[-] Tube / Cap Detection	
[-] Symbol Data Output	Good Read
[-] Noread Message	Enabled
[-] Bad / No Symbol Qualification	
[-] Read Duration Output	Disabled
[-] Output Object Info	Disabled
[-] Output Indicators	
[-] Serial Verification	
[-] Image Output	Disabled
[-] EZ Trax Output	Disabled
[-] <b>EZ Button</b>	Enabled*
[-] Calibration Options	Disabled
[-] Database Identifier Output	Enabled*
[-] Output 1 Parameters	Trigger
[-] Output 2 Parameters	Unlatch Outputs
[-] Output 3 Parameters	Parameter switch
[-] Quality Output	

To change a setting, **double-click** the setting and use your cursor to scroll through the options.

To open nested options, **single-click** the +.

# I/O Parameters Serial Commands

Power On/Reset Counts	<K406,power-on,resets,power-on saves,power-on flash saves,power-on tube/cap library saves>
Time Since Reset	<K407,hours,minutes>
Service Message	<K409,status,service message,threshold,resolution>
Serial Verification	<K701,serial command echo status,serial command beep status,control/hex output>
Beeper	<K702,status>
Quality Output	<K704,quality output separator,decodes/trigger status>
Symbol Data Output	<K705,symbol data output status,when to output>
Read Duration Output	<K706,status,separator>
No Read Message	<K714,status,message>
Bad Symbol Message	<K715,[unused],message>
No Symbol Message	<K716,[unused],message>
1D/Stacked Symbology Qualification	<K717,minimum number of bars,minimum number of qualified scan lines,start/stop status>
2D Symbology Qualification	<K718,finder pattern status,symbol size status,symbol size 1,symbol size 2,symbol size tolerance,dimension status,dimension 1,dimension 2,dimension tolerance,orientation status,orientation value>
Frame Information	<K734,output frame number,output coordinates>
LED Configuration	<K737,LED mode,ISO/IEC 16022 grade>
Image Output	<K739,image output mode,communication port,file format,JPEG quality>
Target/Flood LEDs	<K750,green flash LED status,target pattern LED status,green flash duration>
EZ Trax Output	<K757,status,comm port,image mode,image format,JPEG quality,object info output,grade output,color>
Database Identifier Output	<K759,status,separator>
EZ Button	<K770,global status,default on power-on,load IP database,save for power-on>
EZ Button Modes	<K771,single beep,two beeps,three beeps,four beeps>
Trend Analysis Output 1	<K780,trend analysis mode,number of triggers,number to output on,decodes/trigger threshold>
Trend Analysis Output 2	<K781,trend analysis mode,number of triggers,number to output on,decodes/trigger threshold>
Trend Analysis Output 3	<K782,trend analysis mode,number of triggers,number to output on,decodes/trigger threshold>
Diagnostics Output 1	<K790,unused 1,service unit>
Diagnostics Output 2	<K791,unused 1,service unit>
Diagnostics Output 3	<K792,unused 1,service unit>
ISO/IEC 16022 Symbol Quality Output 1	<K800,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>

---

## I/O Parameters Serial Commands

ISO/IEC 16022 Symbol Quality Output 2	<K801,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>
ISO/IEC 16022 Symbol Quality Output 3	<K802,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>
Configurable Output 1	<K810,output on,output state,pulse width,output mode>
Configurable Output 2	<K811,output on,output state,pulse width,output mode>
Configurable Output 3	<K812,output on,output state,pulse width,output mode>
Tube/Cap Detection Output 1	<K860,mode,output on>
Tube/Cap Detection Output 2	<K861,mode,output on>
Tube/Cap Detection Output 3	<K862,mode,output on>

# Symbol Data Output

## Symbol Data Output Status

**Note:** **Symbol Data Output** relates to data and should not be confused with **Outputs 1, 2, and 3** listed in the **Output Parameters** which describe output states and functions.

*Usage:* Useful when the host needs symbol data only under certain conditions.

*Definition:* Defines the conditions under which decoded symbol data is transmitted to the host.

*Serial Cmd:* <K705,symbol data output status,when to output>

*Default:* **Good Read**

*Options:* 0 = Disabled                      1 = Match  
2 = Mismatch                              3 = **Good Read**

**Note:** **Symbol Data Output Status**, if set to **Match** or **Mismatch**, will not take effect unless **Matchcode Type** is enabled and a master symbol is loaded into memory.

### Disabled

*Usage:* It is useful when an application only needs to use the discrete outputs and can allow the imager to do the decision-making. When **Disabled**, the host does not need the symbol data and the communication lines are used only for setup and status checks.

*Definition:* When set to **Disabled**, the imager will not transmit any data that is generated during a read cycle (symbols, No Reads, etc.)

### Match

*Usage:* **Match** is used in an application that requires specific symbol information and needs to sort, route, or verify based on matching the specific symbol data.

*Definition:* When set to **Match**, the imager transmits symbol data whenever a symbol matches a master symbol. However, if **Matchcode Type** is **Disabled**, it transmits on any Good Read.

**Note:** A No Read can still be transmitted if **Enabled**.

### Mismatch

*Usage:* Mismatch is typically used as a flag within the host system to prevent an item from being routed in the wrong container.

*Definition:* With Mismatch enabled, the imager transmits symbol data whenever the symbol data information does NOT match the master symbol.

**Note:** A No Read can still be transmitted if **Enabled**.

## **Good Read**

*Usage:* **Good Read** is used when an application requires all symbol data to be transmitted. It's typically used in tracking applications in which each object is uniquely identified.

*Definition:* With **Good Read** enabled, the imager transmits symbol data on any Good Read regardless of **Matchcode Type** setting.

**Note:** A No Read can still be transmitted if **Enabled**.

## When to Output Symbol Data

**Definition:** This command allows the user to choose when symbol data can be sent to the host.

**Serial Cmd:** <**K705**,symbol data output status,**when to output**>

**Default:** **As Soon As Possible**

**Options:** **0 = ASAP**                      1 = End of Read Cycle

### As Soon As Possible

**Usage:** **As Soon As Possible** is useful in applications in which symbol data needs to be moved quickly to the host, typically when the host is making decisions based on symbol data.

**Definition:** Enabling **As Soon As Possible** causes operation data to be sent to the host immediately after an index has qualified, or after an operation switch event has occurred.

**Note:** More than one decode might in fact be required to qualify as a Good Read, depending on how **Decodes Before Output** is set.

**Note:** When the read cycle is configured for output **As Soon As Possible**, output filters are applied to each **Multi-Operation** index, but do not apply across Multi-Operation indexes. Output Filter # 1 will apply to the first output of each Multi-Operation index, and so on.

### End of Read Cycle

**Usage:** **End of Read Cycle** is useful in timing-based systems in which the host is not ready to accept data at the time that it is decoded.

**Definition:** Enabling **End of Read Cycle** means that operation data will not be sent to the host until the read cycle ends with a timeout or new trigger, or until all operations defined in **Multi-Operation** are completed.

**Note:** When the read cycle is configured for output at **End of Read Cycle**, the output filters are applied to the final output of the read cycle. Therefore, all active filters are applied across all Multi-Operation indexes.

For example, if **3** operations are enabled, one in each index, and if **3** filter positions are active, all 3 filters will be applied to each operation and the final output will be ordered according to the filters. See the table and resulting output shown below.

<b>Index</b>	<b>Operation</b>	<b>Filter Position</b>	<b>Filter On</b>
<b>1</b>	Bar Code Reader	<b>1</b>	Cap
<b>2</b>	Tube Detection	<b>2</b>	Tube
<b>3</b>	Cap Detection	<b>3</b>	Nothing

Assuming each operation was successful, the output would be as follows:  
**CP\_,TP\_,symbol data**

## No Read Message

*Usage:* Used in applications where the host needs serial verification that a symbol has not been read and especially useful in new print verification.

*Definition:* When enabled, and if no symbol has been decoded before timeout or the end of the read cycle, the No Read message will be transmitted to the host.

### No Read Message Mode

*Serial Cmd:* <**K714**,*No Read message status*,*No Read message*>

*Default:* **Enabled**

*Options:* 0 = Disabled                    **1 = Enabled**                    2 = Detailed No Read Message

#### Disabled

Only symbol data is output after a read cycle.

#### Enabled

When the imager is in a triggered mode, a No Read message will be appended for each failed read attempt.

#### Detailed No Read Message

**Important:** In the case where the conditions set in **Bad Symbol/No Symbol Qualification** are met, then the **Bad Symbol** or **No Symbol** message output will override the **No Read Message** or the **Detailed No Read Message**, if either is enabled.

*Usage:* Use this option to cover more detailed reasons for decode failures.

*Definition:* Outputs a **No Read** message followed by an additional message (an Image Processing Results Code) indicating the reason a symbol failed to decode.

For example, in the following output: “No Read d\_1, E\_2”, d and E are symbology i.d.s for Data Matrix and UPC respectively. The message means that Data Matrix and UPC are enabled (and other symbologies are not), and that both failed to decode. The reason for the failing Data Matrix is 1 and the reason for the failing UPC is 2. The first part of these numbers (preceding the dot) is the relevant number and is interpreted here:

#### 2D Symbols:

1. Failed to locate symbol (no finder pattern).
2. Failed to locate four corners or failed to qualify user defined dimensions (in pixels).
3. Failed to locate clock patterns or failed to qualify user-defined orientation (0-359 degrees).
4. Failed to validate clock patterns or failed to qualify user defined symbol size (clock element count).
5. Failed to decode symbol.

### **Linear (1D) Symbols:**

1. Failed user defined minimum number of bars.
2. Failed to decode start/stop character (doesn't apply to UPC, GS1 DataBar, MicroPDF417, or Pharmacode).
3. Failed user defined minimum number of scan lines that qualify for the minimum number of bars.
4. Failed to decode.
5. Failed to decode UPC supplemental.

### **No Read Message**

**Definition:** Any combination of ASCII characters can be defined as the No Read message.

**Serial Cmd:** <K714,No Read message status,**No Read message**>

**Default:** **No Read**

**Options:** A string of up to 64 characters.

**Note: No Read Message** will only be transmitted if **Symbol Data Output** is set to **Match**, **Mismatch**, or **Good Read**.

**No Read Message** can be set to any ASCII character.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K714h,,3C>

For >: <K714h,,3E>

For , : <K714h,,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Bad Symbol Message

*Usage:* Useful in determining if a symbol is present and if user defined requirements for that symbol are met. Can tell the user if a qualified symbol is present but not decodable.

*Definition:* Sets the requirements that will qualify an object or a symbol before outputting a decode or message. When enabled, sends a message to the host whenever an object meets the qualifications setup but is not decoded.

*Serial Cmd:* **<K715,[unused],message>**

*Default:* **BAD\_SYMBOL**

*Options:* Up to 64 ASCII characters.

**Important:** The ASCII characters **<**, **>**, and **,** can only be entered as hex pairs:

For **<**: **<K715h,,3C>**

For **>**: **<K715h,,3E>**

For **,**: **<K715h,,2C>**

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## No Symbol Message

*Usage:* Useful in determining if a symbol is present and if user defined requirements for that symbol are met. Can tell the user if an object does not qualify as a symbol.

*Definition:* Sets the requirements that will qualify an object or a symbol before outputting a decode or message. When enabled, sends a message to the host whenever an object meets the qualifications setup but is not decoded.

*Serial Cmd:* **<K716,[unused],message>**

*Default:* **NO\_SYMBOL**

*Options:* Up to 64 ASCII characters.

**Important:** The ASCII characters **<**, **>**, and **,** can only be entered as hex pairs:

For **<**: **<K716h,,3C>**

For **>**: **<K716h,,3E>**

For **,**: **<K716h,,2C>**

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

# 1D / Stacked Symbology Qualification

## Minimum Number of Bars

**Definition:** Sets the minimum number of bars to qualify linear symbols.

**Serial Cmd:** <**K717**,*minimum number of bars*,*minimum number of qualified scan lines*,*start/stop status*>

**Default:** **0**

**Options:** 0 to 255 (0 = disabled)

## Minimum Number of Qualified Scan Lines

**Definition:** Sets the minimum number of scans that have the required number of bars set in **Minimum Number of Bars**.

**Note:** This is a percentage value, from 0 to 100.

**Serial Cmd:** <**K717**,*minimum number of bars*,*minimum number of qualified scan lines*,*start/stop status*>

**Default:** **Disabled**

**Options:** Any number from 0 to 100 (**0 = Disabled**)

## Start/Stop Status

**Definition:** When enabled, both **Start** and **Stop** characters need to be present to qualify as a decodable symbol. In the case of PDF417, only a **Stop** needs to be present.

**Note:** This parameter does not apply to UPC, GS1 DataBar, MicroPDF417, or Pharmacode.

**Serial Cmd:** <**K717**,*minimum number of bars*,*minimum number of qualified scan lines*,*start/stop status*>

**Default:** **Disabled**

**Options:** **0 = Disabled**      1 = Enabled

## 2D Symbology Qualification

**Note:** In the cases where **Symbol Size Status**, **Dimension Status**, or **Orientation Status** is enabled, the imager will always check the finder pattern regardless of **Finder Pattern Status** setting.

### Finder Pattern Status

**Definition:** Checks for the presence of a finder pattern.

**Serial Cmd:** <K718,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,dimension 1,dimension 2,dimension tolerance,orientation mode,orientation value>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

### Symbol Size Mode

**Note:** If **Symbol Size 1** is larger than **Symbol Size 2**, it will be automatically reversed in the algorithm.

**Definition:** Specifies the outputs resulting from the searches for **Symbol Size 1** and **Symbol Size 2**.

**Serial Cmd:** <K718,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,dimension 1,dimension 2,dimension tolerance,orientation mode,orientation value>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Bad/No Symbol Output  
3 = Enable Both 2 = Object Qualification

### Disabled

Decoded messages are output, but no attempt to qualify symbols or output Bad or No Symbol messages is undertaken.

### Bad/No Symbol Output

Checks first for decodes. If no symbol is decoded, checks for symbol size. If both **Symbol Size 1** and **Symbol Size 2** requirements are met, a **Bad Symbol** message is output. If neither are met, a **No Symbol** message is output.

### Object Qualification

Checks first for matches to symbol size. If qualified, attempts to decode. If no decodes are found within the specified read cycle parameters, outputs a **No Read** message.

### Enable Both

Same as **Object Qualification**, except that if no objects qualify, then a **No Symbol** message is output; if at least one object qualifies, then a **Bad Symbol** message is output.

## Symbol Size 1

**Definition:** Checks for symbol sizes for a specified number of elements. In the case of rectangular symbols, checks the longer side.

**Serial Cmd:** <K718,finder pattern status,symbol size mode,**symbol size 1**,symbol size 2,symbol size tolerance,dimension mode,dimension 1,dimension 2,dimension tolerance,orientation mode,orientation value>

**Default:** 10

**Options:** 8 to 88 elements

## Symbol Size 2

**Definition:** Checks for symbol sizes for a specified number of elements. In the case of rectangular symbols, checks the shorter side.

**Serial Cmd:** <K718,finder pattern status,symbol size mode,symbol size 1,**symbol size 2**,symbol size tolerance,dimension mode,dimension 1,dimension 2,dimension tolerance,orientation mode,orientation value>

**Default:** 10

**Options:** 8 to 88 elements

## Symbol Size Tolerance

**Definition:** Sets the allowable deviation, up or down, for symbol sizes specified in **Symbol Size 1** and **Symbol Size 2**.

**Serial Cmd:** <K718,finder pattern status,symbol size mode,symbol size 1,symbol size 2,**symbol size tolerance**,dimension mode,dimension 1,dimension 2,dimension tolerance,orientation mode,orientation value>

**Default:** 2

**Options:** 0 to 10

## Dimension Mode

**Definition:** Enables searches for symbol Dimension 1 and Dimension 2.

**Serial Cmd:** <K718,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,dimension 1,dimension 2,dimension tolerance,orientation mode,orientation value>

**Default:** Disabled

**Options:** 0 = Disabled      1 = Bad/No Symbol Output      2 = Object Qualification  
3 = Enable Both

### Disabled

Decoded messages are output, but no attempt to qualify symbols or output **Bad Symbol** or **No Symbol** messages is undertaken.

### Bad/No Symbol Output

Checks first for decodes. If no symbol is decoded, checks for symbol dimension. If both **Dimension 1** and **Dimension 2** requirements are met, a **Bad Symbol** message is output. If neither are met, a **No Symbol** message is output.

### Object Qualification

Checks first for matches to symbol dimension. If qualified, attempts to decode. If no decodes are found within the specified read cycle parameters, outputs a **No Read** message.

### Enable Both

Same as **Object Qualification**, except that if neither **Dimension 1** nor **Dimension 2** qualifies, then a **No Symbol** message is output; if either **Dimension 1** or **Dimension 2** qualifies, then a **Bad Symbol** message is output.

## Dimension 1

**Definition:** Checks symbol dimension for a specified number of pixels. In the case of rectangular symbols, checks the longer side.

**Serial Cmd:** <**K718**,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,**dimension 1**,dimension 2,dimension tolerance,orientation mode,orientation value>

**Default:** **0**

**Options:** 0 to 1280 pixels

## Dimension 2

**Definition:** Checks symbol dimension for a specified number of pixels. In the case of rectangular symbols, checks the shorter side.

**Serial Cmd:** <**K718**,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,dimension 1,**dimension 2**,dimension tolerance,orientation mode,orientation value>

**Default:** **0**

**Options:** 0 to 1024 pixels

## Dimension Tolerance

**Definition:** Sets the allowable deviation, in percentage, for symbol sizes specified in Dimension 1 and Dimension 2.

**Serial Cmd:** <**K718**,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,dimension 1,dimension 2,**dimension tolerance**,orientation mode,orientation value>

**Default:** **10**

**Options:** 0 to 100

## Orientation Mode

**Definition:** Sets the orientation value.

**Serial Cmd:** <**K718**,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,dimension 1,dimension 2,dimension tolerance,**orientation mode**,orientation value>

**Default:** **Disabled**

**Options:** **0 = Disabled**      1 = Bad/No Symbol Output      2 = Object Qualification  
3 = Enable Both

### Disabled

Decoded messages are output, but no attempt is made to qualify symbols or to output **Bad Symbol** or **No Symbol** messages.

### Bad/No Symbol Output

Checks first for decodes. If no symbol is decoded, checks for symbol orientation. If **Orientation Value** is satisfied, a **Bad Symbol** message is output. If not satisfied, a **No Symbol** message is output.

### Object Qualification

Checks first for matches to symbol **Orientation Value**. If qualified, attempts to decode. If no decodes are found within the specified read cycle parameters, outputs a **No Read** message.

### Enable Both

Same as **Object Qualification**, except that if **Orientation Value** is satisfied but the symbol is not decoded, then a **Bad Symbol** message is output; if **not** satisfied, a **Bad Symbol** message is still output.

## Orientation Value


**Usage:** Instructs the imager to ignore symbols not in the specified orientation.

**Definition:** Sets the orientation of the symbol, in degrees clockwise from the default 0 orientation.

For Data Matrix symbols, sets the finder "L" pattern, with the example to the right showing the default 0 orientation.

For QR Code, sets the locator pattern (three squares), with the example to the right showing the default 0 orientation.

The other position settings will rotate clockwise from the defaults shown above.

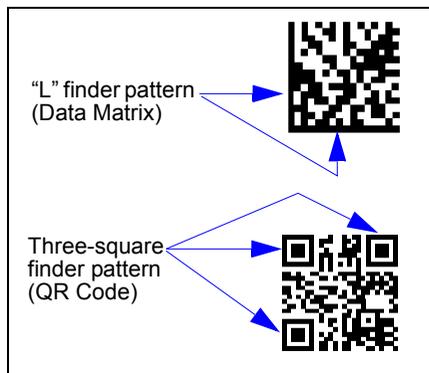

**Serial Cmd:** <K718,finder pattern status,symbol size mode,symbol size 1,symbol size 2,symbol size tolerance,dimension mode,dimension 1,dimension 2,dimension tolerance,orientation mode,**orientation value**>

**Default:** 0

**Options:** 0 to 359

**Note:** A symbol's orientation can miss the precise **Orientation Value** by several degrees and still be qualified. To be certain of the extent of the allowable tolerance, you should experiment with symbols in various orientations. In no case can they be more than 45° from the assigned orientation value and still be qualified.

## Read Duration Output

**Usage:** Useful in evaluating actual read cycle timing results, especially when initially setting up an application to determine maximum line speed (obtainable based on spacing between symbols.)

**Definition:** When enabled the duration of the read cycle (in milliseconds) is appended to the symbol data.  
The read duration is the time from the beginning of the read cycle until data is output.

### Read Duration Output Mode

**Serial Cmd:** <K706,status,separator>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

**Important:** To measure the entire read cycle when in **External Level** trigger mode, set **When to Output Symbol Data** to **End of Read Cycle**.

This output can measure over 49 days' worth of duration; if exceeded, the "OVERFLOW" message will be output in place of the duration.

### Read Duration Output Separator

**Definition:** User defined character that separates the symbol information from the **Read Duration Output**.

**Serial Cmd:** <K706,status,separator>

**Default:** [space character]

**Options:** Any ASCII character.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K706h,,3C>

For >: <K706h,,3E>

For , : <K706h,,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Output Indicators

The EZ Match Imager has a beeper and three LED arrays, as follows:

1. A target pattern of blue LEDs for centering the field of view, which is projected from the front of the imager .
2. An array of green LEDs projected from the front of the imager that can be programmed to flash in response to user-defined conditions.
3. A row of five status LEDs on the side of the imager.

### Green Flash Mode

**Usage:** Used as a visual verification that a Good Read has occurred.

**Definition:** An array of green LEDs in the front of the imager can be programmed to flash in response to user-defined conditions.

**Serial Cmd:** `<K750,green flash mode,target pattern status,green flash duration>`

**Default:** **Good Read**

**Options:**

- 0 = Disabled
- 1 = Good Read**
- 2 = Static Presentation
- 3 = Match
- 4 = Mismatch
- 5 = Strobe

### Disabled

Green flash LEDs are disabled.

### Good Read

Green flash LEDs will flash when a Good Read condition is met or when **Matchcode** is enabled and a match occurs.

## Static Presentation Mode

**Static Presentation Mode** is used in conjunction with **Continuous Read Mode**: <K200,0>.

When operating in **Static Presentation Mode**, the red LEDs will illuminate while the imager is searching for a symbol in **Continuous Read Mode**. When a symbol is placed in the field of view and a Good Read occurs, the green LEDs will illuminate and stay on for the duration of time set in **Green Flash Duration**. Only one read will occur during that time unless more than one symbol is enabled in **Number of Symbols**.

**Note:** If **Static Presentation Mode** is selected but the imager is not in **Continuous Read**, the **Green Flash** will not occur.

### To use Static Presentation:

1. Enable **Continuous Read**.
2. Select the number of symbols.
3. Enable **Static Presentation** in **Green Flash Mode**.
4. Select the read time in **Green Flash Duration**.

## Match

The green LEDs will flash when a match condition is met. If multisymbol is enabled, then green flash LEDs will illuminate only if all symbols qualify as a match. If matchcode is disabled, then this mode will activate the LEDs on a Good Read.

## Mismatch

Same as **Match**, except that LEDs will illuminate on a mismatch.

## Strobe

Green flash LEDs will act as an illumination strobe for image capture. If it is required that the green flash LEDs be the *only* illumination for image capture, then the internal illumination LEDs can be disabled.

## Target Pattern

- Usage:** Assists users in positioning and locating symbols in the center of the imager's field of view.
- Definition:** The user can control when the targeting system is ON or OFF, and can save this condition for power-on.
- Serial Cmd:** <K750,green flash mode,**target pattern status**,green flash duration>
- Default:** **Always Off**
- Options:** **0 = Always Off**  
1 = ON only when not in the read cycle  
2 = ON only when in the read cycle  
3 = Always ON

**Important:** The targeting system actuated by the EZ Button or operational command overrides this setting.

### Always OFF

The target pattern will remain OFF at all times unless overridden by the EZ Button or operational command.

### ON Only When Not in the Read Cycle

The target pattern is always ON except during the read cycle. If the EZ Button or operational command overrides this setting, the target pattern will remain on at all times.

### ON Only When in the Read Cycle

The target pattern will remain OFF except during the read cycle. If the EZ Button or operational command overrides this setting, the target pattern will remain on at all times.

### Always ON

The target pattern is always ON.

## **Green Flash Duration**

*Usage:* Provides visual verification that a Good Read has occurred.

*Definition:* When a Good Read occurs, the green LEDs will illuminate and stay on for the time set in the **Green Flash Duration** value.

*Serial Cmd:* <**K750**,green flash mode,target pattern status,**green flash duration**>

*Default:* **100** (1 second)

*Options:* 0 to 65535 (in 10 ms increments)

# Beeper

*Usage:* An audible verification that either a Good Read or a No Read has occurred.

*Definition:* A beep is emitted after each Good Read or No Read.

*Serial Cmd:* <K702,beeper status>

*Default:* **Good Read**

*Options:* 0 = Disabled                      **1 = Good Read**                      2 = No Read

**Note:** The beeper will also sound at any of the following times:

- When the imager is defaulted.
- When a send/save command is sent from **ESP**.
- At the conclusion of a calibration procedure.
- When a <Z>, <Zp>, <Zrd>, or <K701,,1> command is sent.

# LED Configuration

*Usage:* Useful as a visible indicator of Read Rates and symbol quality.

*Definition:* Determines the mode in which the status LEDs operate.

*Serial Cmd:* <K737,LED mode,ISO/IEC 16022 grade>

*Default:* **Standard**

*Options:* **0 = Standard**      1 = ISO/IEC 16022 grade

In ISO/IEC 16022 grade mode the LEDs represent the grade of the first Data Matrix symbol decoded in the read cycle.

The parameter to be graded is set in the **ISO/IEC 16022 Grade** options.

For example, to program the LEDs to indicate the ISO/IEC 16022 print growth grade, set **LED Mode** to **ISO/IEC 16022 Grade** and set **ISO/IEC 16022 Grade** to **Print Growth**. If all the LEDs from 20% to 100% are illuminated, the read result is a grade A; if only the 20% LED is illuminated, the result is a grade F.

## Standard

In **Standard Mode**, the Status LED indicates read cycle status and the Good Read LED illuminates upon a Good Read at the end of a read cycle. In a Read Rate test, these LEDs represent the percentage of Good Reads per images captured.

## ISO/IEC 16022 Grade

*Usage:* Provides visual grading of specific ISO/IEC 16022 parameters.

*Definition:* Determines which ISO/IEC 16022 parameter the imager will grade via the LEDs.

*Serial Cmd:* <K737,LED mode,ISO/IEC 16022 grade>

*Default:* **Final Grade**

*Options:* **0 = Final Grade**  
1 = Symbol Contrast  
2 = Print Growth  
3 = Axial Non-Uniformity  
4 = Unused ECC

## Serial Verification


Allows the user to verify configuration command status.

### Serial Command Echo Status

**Usage:** This command is useful in removing any doubt about the imager's interpretation of any configuration command.

For example, if the current preamble is "SOM" and **<K701,1,START>** is entered, the imager will echo back **<K701,SOM>** since the attempted entry "START" exceeds the four character limit for that command. Therefore, it is rejected and the existing "SOM" message is echoed back and remains the preamble message.

**Definition:** When enabled, a configuration command received from the host is echoed back to the host with the resultant settings.

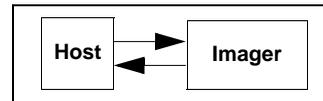

**Function:** If a command with multiple fields is processed, some of the fields may have been processed properly while others were not. The changes will appear in the string echoed back so that the user will know which fields did or did not change.

**Serial Cmd:** **<K701,serial command echo status,serial command beep status,control/hex output>**

**Default:** **Disabled**

**Options:** **0 = Disabled**      1 = Enabled

### Serial Command Beep Status

**Usage:** Used to audibly verify the acceptance and validity of a command.

**Definition:** Causes the imager to beep once whenever a K command is entered to indicate that the command was accepted and processed.

**Function:** If an invalid command is entered, the imager beeps 5 times to indicate an invalid entry. However, this does not necessarily mean that all data fields have been entered incorrectly. Only one bad field needs to be found in order to activate the 5 beep response.

**Serial Cmd:** **<K701,serial command echo status,serial command beep status,control/hex output>**

**Default:** **Disabled**

**Options:** **0 = Disabled**      1 = Enabled

## Control/Hex Output

**Usage:** Useful for viewing settings with binary characters when using serial commands on a terminal.

**Definition:** Determines the response to a **Serial Command Echo** or status request command.

When set to **Control**, two characters are transmitted to represent a non-displayable character. For example, a carriage return will be shown as: **^M**.

**Serial Cmd:** **<K701,serial command echo status,serial command beep status,control/hex output>**

**Default:** **Control**

**Options:** **0 = Control**            1 = Hex

## EZ Button

The EZ Button has four positions, selectable by the length of time the button is held down, and indicated by one, two, three, and four beeps in succession. Each position can be programmed for any of eight options.

*Definition:* Serves as a master switch to enable/disable the EZ Button status.

*Serial Cmd:* <**K770,global status**,default on power-on,load IP database,save for power-on>

*Default:* **Enabled**

*Options:* 0 = Disabled                      **1 = Enabled**                      2 = Trigger  
3 = Unlatch Outputs                      4 = Parameter Switch

### Global Status

#### Disabled

When set to **Disabled**, the EZ Button does not function.

#### Enabled

When selected, the EZ Button is enabled and the function of each button position is selected by the **EZ Button Mode** command.

#### Trigger

When selected, the EZ Button acts as a trigger for the imager to start and end read cycles. All other button operations are inactive.

*In External Level:* The read cycle endures for as long as the EZ Button is pressed, unless a timeout occurs and **Timeout** is enabled for **End of Read Cycle**.

*In External Edge:* As with **Level**, **Edge** allows a read cycle to be initiated by pressing the EZ Button, but unlike **Level**, the read cycle ends with a Good Read output, a timeout, or a new trigger.

#### Unlatch Outputs

In this configuration, the EZ Button will unlatch any logic outputs that have been latched.

#### Parameter Switch

The parameter switch toggles between custom defaults and power-on settings. The condition is the same as that achieved by sending the <**Arc**> and <**Arp**> commands consecutively.

## Default on Power-On

**Definition:** When enabled, if the EZ Button is held down on power-on the imager will default to customer defaults and save for power-on. This is the same as sending a **<Zrc>** command.

**Serial Cmd:** **<K770,global status,default on power-on,load IP database,save for power-on>**

**Default:** **Enabled**

**Options:** 0 = Disabled                      **1 = Enabled**

## Load IP Database

**Definition:** Allows the user to load the IP Database with calibration results. When the user performs a calibration using the EZ Button, all the database entries are moved down one index and the results of the calibration are saved to index 1. The results will be saved as current settings as well.

**Serial Cmd:** **<K770,global status,default on power-on,load IP database,save for power-on>**

**Default:** **Enabled**

**Options:** 0 = Disabled                      **1 = Enabled**

## Save for Power-On

**Definition:** If enabled, after calibration is complete, all parameters will be saved for power-on.

**Serial Cmd:** **<K770,global status,default on power-on,load IP database,save for power-on>**

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## EZ Button Modes

- Usage:** Useful for performing multiple, repetitive tasks at the work site.
- Definition:** Allows the user to program each of the EZ Button's 4 positions from a selection of 10 modes.
- Serial Cmd:** **<K771**,single beep,two beeps,three beeps,four beeps>
- Options:** 0 = Disabled                      1 = Enabled

Single Beep	Two Beeps	Three Beeps	Four Beeps
0 = Disabled	0 = Disabled	0 = Disabled	0 = Disabled
1 = Read Rate	1 = Read Rate	<b>1 = Read Rate</b>	1 = Read Rate
2 = Calibration	<b>2 = Calibration</b>	2 = Calibration	2 = Calibration
3 = Save for Power-On	3 = Save for Power-On	3 = Save for Power-On	<b>3 = Save for Power-On</b>
4 = Unused	4 = Unused	4 = Unused	4 = Unused
5 = Load New Master	5 = Load New Master	5 = Load New Master	5 = Load New Master
6 = Unused	6 = Unused	6 = Unused	6 = Unused
<b>7 = Target System</b>	7 = Target System	7 = Target System	7 = Target System
8 = Unused	8 = Unused	8 = Unused	8 = Unused
9 = Bar Code Config.	9 = Bar Code Config.	9 = Bar Code Config.	9 = Bar Code Config.
10 = Tube/Cap Learn	10 = Tube/Cap Learn	10 = Tube/Cap Learn	10 = Tube/Cap Learn

### Disabled

When set to disabled, the associated button position will have no function associated with it, and the position will be skipped over.

### Read Rate

Read Rate will be initiated when the associated button position is selected. Read Rate will perform decodes/second and is the same as sending a **<C>** from the terminal. To exit Read Rate Mode quickly press and release the EZ Button.

### Calibration

Calibration will be initiated when the associated button position is selected. To abort calibration, quickly press and release the EZ Button.

### Save for Power-On

All imager settings will be saved to non-volatile memory to be recalled on power-on whenever the associated button position is selected. This is the same as sending a **<Z>** from the terminal.

### Load New Master

Functions in the same way as new master pin input whenever the associated button position is selected. The new master pin's **Consecutive Decode** requirement holds true for this function.

## ***Target System***

Turns on the target pattern whenever the associated button position is selected. To disable, quickly press and release the EZ Button.

**Note:** This mode is the only one that does not require that the button be released before taking effect. Thus, as soon as the imager beeps the appropriate number of times for the position, it will take effect. If it is necessary to have the target system on before another operation such as calibration or Read Rate is performed, ensure that the target system mode is assigned a lower position so that it will be activated first.

## ***Bar Code Configuration***

Enables bar code configuration mode whenever the associated button position is selected. When enabled, the imager can accept configuration commands from symbols. To disable, quickly press and release the EZ Button.

## ***Tube/Cap Learn***

When this mode is selected, the **Tube/Cap Learn** function begins as soon as the EZ Button is released. If a new profile is found, it is stored to the **Tube/Cap Library**.

## ***EZ Button Operation***

### **Single Beep (Position #1)**

Hold down button until a single beep is heard (and the 20% LED illuminates).

### **Two Beeps (Position #2)**

Hold down button until two quick beeps are heard (and the 20% and 40% LEDs illuminate.)

### **Three Beeps (Position #3)**

Hold down button until three quick beeps are heard (and the 20%, 40%, and 60% LEDs illuminate).

### **Four Beeps (Position #4)**

Hold down button until four quick beeps are heard (and the 20%, 40%, 60%, and 80% LEDs illuminate).

# Configurable Output 1

[-] Output 1 Parameters	
Output On	Tube/Cap Detection
Output State	Negative
Pulse Width	5
Output Mode	Pulse
[+] Trend Analysis	
[+] Symbol Quality (ISO/IEC 16022)	
[+] Diagnostics	
[+] Tube / Cap Detection	

## Default Output Configuration

Output #	Output On:	Output State	Pulse Width	Output Mode
1	8 = Tube/Cap Detection	0 = Negative	5	0 = Pulse
2	8 = Tube/Cap Detection	0 = Negative	5	0 = Pulse
3	0 = Mismatch or No Read	0 = Negative	5	0 = Pulse

## Output On

**Usage:** This option provides discrete signalling to host software to control external devices such as PLCs and relays. It is useful for routing, sorting, and to prevent mis-packaging and mis-routing.

**Definition:** Sets the discrete output functions for specific user-selected conditions. Allows the user to set the conditions under which an output (or outputs) will be activated.

**Serial Cmd:** <K810,output on,output state,pulse width,output mode>

**Default:** **Tube/Cap Detection**

**Options:**

- 0 = Mismatch or No Read
- 1 = Match or Good Read
- 2 = Mismatch
- 3 = No Read
- 4 = Trend Analysis
- 5 = Symbol Quality
- 6 = Diagnostic Warning
- 7 = In Read Cycle
- 8 = Tube/Cap Detection**

**Note:** If **Output On** is set to **Mismatch/No Read** or **Match/Good Read**, a transition (switching) will not occur unless **Matchcode Type** is enabled and a master symbol is loaded into memory.

## **Mismatch or No Read**

Activates a discrete output when the data does not match that of the master symbol or the symbol has not been decoded before the end of the read cycle.

## **Match or Good Read**

Activates a discrete output when the symbol data matches the master symbol.

**Note:** If you want to output for a Good Read and **Matchcode** is not enabled, you can enable any output for **Match**.

## **Mismatch**

Activates a discrete output whenever the symbol data does not match that of the master symbol.

## **No Read**

Activates a discrete output whenever the symbol data is not decoded before the end of the read cycle.

## **Trend Analysis**

Activates discrete output when a trend analysis condition is met, depending on the trend analysis option enabled.

Typically used when successful decodes are occurring but a discrete output is needed to flag a trend in quality issues.

## **Symbol Quality**

Activates discrete output when a symbol quality condition is met, depending on the symbol quality option enabled.

Typically used when a discrete indication is needed to flag a symbol quality condition.

## **Diagnostic Warning**

Activates discrete output when a diagnostic warning condition is met, depending on the diagnostic option enabled.

Typically used when a discrete indication of a diagnostic condition is needed.

## **In Read Cycle**

Activates a discrete output when the imager is in a read cycle.

## **Tube/Cap Detection**

Outputs when the conditions of Tube/Cap Detection have been met. This requires proper configuration of the Tube/Cap Detection parameters.

## Output State

**Definition:** Sets the active electrical state of the discrete output.

**Serial Cmd:** <K810,output on,output state,pulse width,output mode>

**Default:** **Negative**

**Options:** **0 = Negative**                      1 = Positive

## Pulse Width

**Definition:** Sets the time in 10 ms increments that the discrete output remains active.

**Serial Cmd:** <K810,output on,output state,pulse width,output mode>

**Default:** **5** (50 ms)

**Options:** 0 to 255 (0 to 2.55 seconds). Divide the number entered on the command line by 100 for time in seconds.

## Output Mode

**Definition:** Sets the condition in which the discrete output is de-activated.

**Serial Cmd:** <K810,output on,output state,pulse width,output mode>

**Default:** **Pulse**

**Options:** **0 = Pulse**  
2 = Latch Mode 2  
3 = Latch Mode 3

## Pulse

This is the default mode of operation in which the programmable output is activated when the **Output On** condition has been met and held active for the duration of the selected pulse width.

### Latch Mode 2 (*Unlatch Opposite Condition*)

The programmable output is activated when the **Output On** condition has been met and held active until the opposite condition selected under **Output On** has been met.

For example, if **No Read** is enabled under **Output On**, the programmable output will go active on a No Read and remain active until the opposite condition, a Good Read, occurs.

### Latch Mode 3 (*Unlatch Re-enter Read Cycle*)

The programmable output is active when the Output On condition has been met and is held active until a new read cycle begins.


**Note:** All of the **Output On** modes are inhibited when any **Output on Warning** is active for **Output 1**.

# Trend Analysis Output 1

**Note:** **Output On** under **Output 1 Parameters** must be set to **Trend Analysis** (as shown below) for this output to function.



Under **Output 1 Parameters**, expand the **Trend Analysis** line.

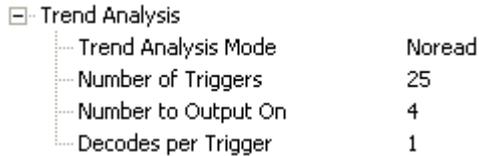


**Usage:** Useful in cases where the user doesn't want to shut down for one condition but wants to monitor quality and read conditions.

**Definition:** Applies **Trend Analysis** settings to **Output 1**.  
With **Trend Analysis**, the user can track the occurrences and frequency of mismatches, No Reads, and the number of reads per trigger, and output the results to any of three outputs.

**Example:** *Trend Analysis Mode = No Read*  
*Number of Triggers = 25 triggers (read cycles)*  
*Number to Output On = 4*  
*Decodes per Trigger = 1*  
In this example, the imager will activate an output when **4** No Reads occur within a period of **25** triggers (read cycles), at **1** decode per trigger.

## Trend Analysis Mode

**Definition:** Sets the trend condition (**Mismatch**, **No Read**, **Decodes/Trigger**, **Bad Symbol**, or **No Symbol**) that will activate the output.

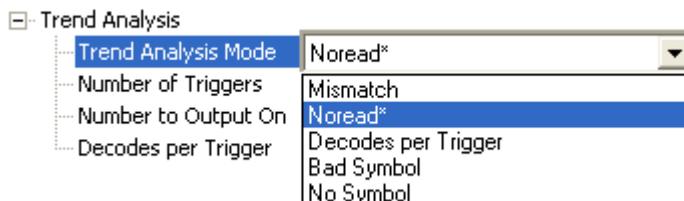

**Serial Cmd:** `<K780,trend analysis mode,number of triggers,number to output on,decodes/trigger threshold>`

**Default:** **No Read**

**Options:**

- 0 = Mismatch
- 1 = No Read**
- 2 = Decodes/Trigger Threshold
- 3 = Bad Symbol
- 4 = No Symbol

### Mismatch

Output will be activated when the number of mismatches equals the value entered for **Number to Output On** within the trigger window selected in **Number of Triggers**.

### No Read

Output will be activated when the number of No Reads equals the value entered for **Number to Output On** within the trigger window selected in **Number of Triggers**.

### Decodes/Trigger Threshold

Output will be activated when the number of decodes equals the value entered for **Number to Output On** within the trigger window selected in **Number of Triggers**.

### Bad Symbol

Output will be activated when the number of **Bad Symbol** occurrences equals the value entered for **Number to Output On** within the trigger window selected in **Number of Triggers**.

### No Symbol

Output will be activated when the number of **No Symbol** occurrences equals the value entered for **Number to Output On** within the trigger window selected in **Number of Triggers**.

## Number of Triggers

*Definition:* The number of triggers to examine for the trend analysis condition.

*Serial Cmd:* <K780,trend analysis mode,number of triggers,number to output on,decodes/trigger threshold>

*Default:* 0

*Options:* 0 to 255

## Number to Output On

*Usage:* *Example:* If **Number to Output On** is set to 3 and **Trend Analysis Mode** is set to **No Read**, then the output will not be activated until 3 No Reads have occurred.

*Definition:* Sets the number of **Trend Analysis Mode** events (mismatches, No Reads, or reads/trigger as configured by **Trend Analysis Mode**) to occur within the trigger evaluation period before activating the associated output.

*Serial Cmd:* <K780,trend analysis mode,number of triggers,number to output on,decodes/trigger threshold>

*Default:* 0

*Options:* 0 to 255

## Decodes/Trigger Threshold

*Definition:* When set to this mode, and when the appropriate output is set to output on trend analysis, the imager will function in a **Decodes per Trigger** mode during the read cycle and the trend analysis operation. Output will be activated based on whether or not the symbol decode count at the end of the read cycle crosses the decodes per trigger threshold.

**Note:** Although this setup causes the imager to function in a **Decodes per Trigger** mode, the decode count will only be appended to the symbol data if the status of the **Decodes per Trigger** command is enabled.

*Serial Cmd:* <K780,trend analysis mode,number of triggers,number to output on,decodes/trigger threshold>

*Default:* 0


*Options:* 0 to 65535

# ISO/IEC 16022 Symbol Quality Output 1

**Note:** **Output On** under **Output 1 Parameters** must be set to **Symbol Quality** (as shown below) for this output to function.



Under **Output 1 Parameters**, expand the **Symbol Quality (ISO/IEC 16022)** line.

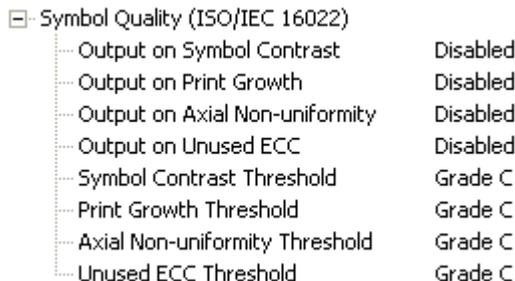

## Output on Symbol Contrast

**Usage:** Lets the user know if symbol quality is less than acceptable.

**Definition:** If enabled, toggles Output 1 to an active state when **Symbol Contrast Threshold** is met.

**Serial Cmd:** <**K800,output on symbol contrast**,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Output on Print Growth

**Usage:** Lets the user know if symbol quality is less than acceptable.

**Definition:** If enabled, toggles **Output 1** to an active state when **Print Growth Threshold** is met.

**Serial Cmd:** <**K800,output on symbol contrast**,symbol contrast threshold,**output on print growth**,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

## Output on Axial Non-Uniformity

- Usage:** Lets the user know if symbol quality is less than acceptable.
- Definition:** If enabled, toggles **Output 1** to an active state when **Axial Non-Uniformity Threshold** is met.
- Serial Cmd:** <**K800**,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,**output on axial non-uniformity**,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

## Output on Unused Error Correction

- Usage:** Lets the user know if symbol quality is less than acceptable.
- Definition:** If enabled, toggles **Output 1** to an active state when **Unused ECC Threshold** is met.
- Serial Cmd:** <**K800**,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,**output on unused ECC**,unused ECC threshold>
- Default:** **Disabled**
- Options:** **0 = Disabled**                      1 = Enabled

## Symbol Contrast Threshold

- Usage:** Lets the user set the acceptable level of symbol quality.
- Definition:** Conforms to ISO/IEC 16022 symbol quality grading (A,B,C,D).
- Serial Cmd:** <**K800**,output on symbol contrast,**symbol contrast threshold**,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>
- Default:** **Grade C**
- Options:** 0 = Grade A  
1 = Grade B  
**2 = Grade C**  
3 = Grade D

## Print Growth Threshold

- Usage:** Lets the user set the acceptable level of symbol quality.
- Definition:** Conforms to ISO/IEC 16022 symbol quality grading (A,B,C,D).
- Serial Cmd:** <**K800**,output on symbol contrast,symbol contrast threshold,output on print growth,**print growth threshold**,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>
- Default:** **Grade C**
- Options:** 0 = Grade A  
1 = Grade B  
**2 = Grade C**  
3 = Grade D

## Axial Non-Uniformity Threshold

- Usage:** Lets the user set the acceptable level of symbol quality.
- Definition:** Conforms to ISO/IEC 16022 symbol quality grading (A,B,C,D).
- Serial Cmd:** <**K800**,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,**axial non-uniformity threshold**,output on unused ECC,unused ECC threshold>
- Default:** **Grade C**
- Options:** 0 = Grade A  
1 = Grade B  
**2 = Grade C**  
3 = Grade D

## Unused Error Correction Threshold

- Usage:** Lets the user set the acceptable level of symbol quality.
- Definition:** Conforms to ISO/IEC 16022 symbol quality grading (A,B,C,D).
- Serial Cmd:** <**K800**,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,**unused ECC threshold**>
- Default:** **Grade C**
- Options:** 0 = Grade A  
1 = Grade B  
**2 = Grade C**  
3 = Grade D

# Diagnostics Output 1

**Note:** **Output On** under **Output 1 Parameters** must be set to **Diagnostic Warning** (as shown below) for this output to function.



Under **Output 1 Parameters**, expand the **Diagnostics** line.



*Serial Cmd:* <K790,unused 1,service unit>

*Default:* 0

*Options:* 0 = Disabled

## Service Unit

When **Diagnostic Warning** is enabled, the **Output On** configuration has no effect. The output will remain active as long as one of the diagnostic warning conditions is met. The output will become inactive once it detects that there are no diagnostic warning conditions.

*Definition:* Allows the user to set up the output to toggle to active when the service timer has expired. This condition will only be held for one service timer click.

**Note:** This feature cannot be used if the imager is in a **Continuous Read** mode.

*Serial Cmd:* <K790,unused 1,service unit>

*Default:* 0

*Options:* 0 = Disabled 1 = Enabled


# Tube/Cap Detection Output 1

**Note:** **Output On** under **Output 1 Parameters** must be set to **Tube/Cap Detection** (as shown below) for this output to function.



Under **Output 1 Parameters**, expand the **Tube/Cap Detection** line.

**Important:** The **Tube/Cap Detection Output 1** default setting for **Output On** is **Presence**.

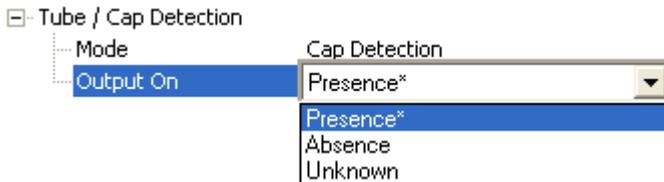

<b>Output #</b>	<b>Mode</b>	<b>Output On</b>
<b>1</b>	1 = Cap Detection	Presence
<b>2</b>	1 = Cap Detection	Unknown
<b>3</b>	1 = Cap Detection	Absence

## Detection Mode

**Definition:** Detection Mode determines the type of operation to be evaluated by the imager.

**Serial Cmd:** <K860,mode,output on>

**Default:** **Cap Detection**

**Options:** 0 = Tube Detection      **1 = Cap Detection**

## Tube Detection

**Output On** fields will show Tube Detection results.

## Cap Detection

**Output On** fields will show Cap Detection results.

## Output On

*Definition:* Output On selects the type of condition in which to output.

*Serial Cmd:* <K860,mode,output on>

*Default:* **Presence**

*Options:* **0 = Presence**                      1 = Absence                      2 = Unknown\*

**\*Important:** There is no “Unknown” condition for Tube Detection. “Unknown” is not a valid selection for Output On if Detection Mode is set to Tube Detection.

### Presence

Based on the mode selected (Tube Detection or Cap Detection), the output will be asserted if the read cycle results in a **Presence** condition.

### Absence

Based on the mode selected (Tube Detection or Cap Detection), the output will be asserted if the read cycle results in an **Absence** condition.

### Unknown

Since there is no “Tube Unknown” condition, the output will be asserted if the read cycle results in an **Absence** condition and *if the Tube/Cap Detection mode is set to Tube Detection*. If Tube/Cap Detection mode is set to **Cap Detection**, the **Unknown** condition will output normally.

## Configurable Output 2

**Note:** **Output 2** has the same parameters and default settings as **Output 1**.

[-] Output 2 Parameters	
[-] Output On	Tube/Cap Detection
[-] Output State	Negative
[-] Pulse Width	5
[-] Output Mode	Pulse
[+] Trend Analysis	
[+] Symbol Quality (ISO/IEC 16022)	
[+] Diagnostics	
[+] Tube / Cap Detection	

*Serial Cmd: <K811,output on,output state,pulse width,output mode>*

## Trend Analysis Output 2

**Note:** **Output On** under **Output 2 Parameters** must be set to **Trend Analysis** (as shown below) for this output to function.

[-] Output 2 Parameters	
[-] Output On	Trend Analysis

*Serial Cmd: <K781,trend analysis mode,trigger evaluation period,number to output on,decodes/trigger threshold>*

## ISO/IEC 16022 Symbol Quality Output 2

**Note:** **Output On** under **Output 2 Parameters** must be set to **Symbol Quality** (as shown below) for this output to function.

[-] Output 2 Parameters	
[-] Output On	Symbol Quality

*Serial Cmd: <K801,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>*

## Diagnostics Output 2

**Note:** **Output On** under **Output 2 Parameters** must be set to **Diagnostic Warning** (as shown below) for this output to function.

[-] Output 2 Parameters	
[-] Output On	Diagnostic Warning

*Serial Cmd: <K791,unused 1,service unit>*

## Tube/Cap Detection Output 2


**Note:** **Output On** under **Output 2 Parameters** must be set to **Tube/Cap Detection** (as shown below) for this output to function.



*Serial Cmd:* <K861,mode,output on>

Under **Output 2 Parameters**, expand the **Tube/Cap Detection** line.

**Important:** The **Tube/Cap Detection Output 2** default setting for **Output On** is **Unknown**.

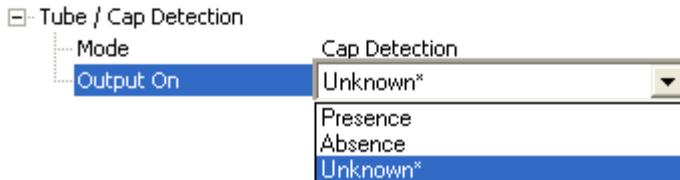

### Presence

Based on the mode selected (Tube Detection or Cap Detection), the output will be asserted if the read cycle results in a **Presence** condition.

### Absence

Based on the mode selected (Tube Detection or Cap Detection), the output will be asserted if the read cycle results in an **Absence** condition.

### Unknown

Since there is no “Tube Unknown” condition, the output will be asserted if the read cycle results in an **Absence** condition and *if the Tube/Cap Detection mode is set to Tube Detection*. If Tube/Cap Detection mode is set to **Cap Detection**, the **Unknown** condition will output normally.

## Configurable Output 3

**Note:** **Output 3** has the same parameters and default settings as **Output 1** and **Output 2**.

[-] Output 3 Parameters	
[---] Output On	Mismatch or Noread
[---] Output State	Negative
[---] Pulse Width	5
[---] Output Mode	Pulse
[+] Trend Analysis	
[+] Symbol Quality (ISO/IEC 16022)	
[+] Diagnostics	
[+] Tube / Cap Detection	

*Serial Cmd:* <K812,output on,output state,pulse width,output mode>

## Trend Analysis Output 3

**Note:** **Output On** under **Output 3 Parameters** must be set to **Trend Analysis** (as shown below) for this output to function.

[-] Output 3 Parameters	
[---] Output On	Trend Analysis

*Serial Cmd:* <K782,trend analysis mode,trigger evaluation period,number to output on,decodes/trigger threshold>

## ISO/IEC 16022 Symbol Quality Output 3

**Note:** **Output On** under **Output 3 Parameters** must be set to **Symbol Quality** (as shown below) for this output to function.

[-] Output 3 Parameters	
[---] Output On	Symbol Quality

*Serial Cmd:* <K802,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC,unused ECC threshold>

## Diagnostics Output 3

**Note:** **Output On** under **Output 3 Parameters** must be set to **Diagnostic Warning** (as shown below) for this output to function.

[-] Output 3 Parameters	
[---] Output On	Diagnostic Warning

*Serial Cmd:* <K792,unused 1,service unit>

## Tube/Cap Detection Output 3


**Note:** **Output On** under **Output 3 Parameters** must be set to **Tube/Cap Detection** (as shown below) for this output to function.



**Serial Cmd:** <K862,mode,output on>

Under **Output 3 Parameters**, expand the **Tube/Cap Detection** line.

**Important:** The **Tube/Cap Detection Output 3** default setting for **Output On** is **Absence**.

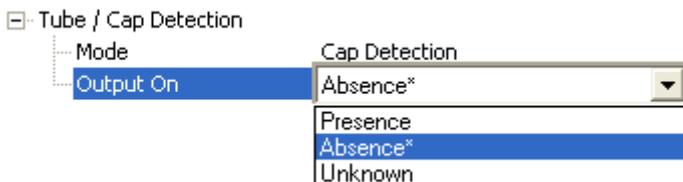

### Presence

Based on the mode selected (Tube Detection or Cap Detection), the output will be asserted if the read cycle results in a **Presence** condition.

### Absence

Based on the mode selected (Tube Detection or Cap Detection), the output will be asserted if the read cycle results in an **Absence** condition.

### Unknown

Since there is no “Tube Unknown” condition, the output will be asserted if the read cycle results in an **Absence** condition and *if the Tube/Cap Detection mode is set to Tube Detection*. If Tube/Cap Detection mode is set to **Cap Detection**, the **Unknown** condition will output normally.

## Frame Information

### Output Frame Number

*Serial Cmd:* <**K734,output frame number,output coordinates**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

#### Disabled

When **Output Frame Number** is set to **Disabled**, the frame number is not output as part of the symbol data.

#### Enabled

When **Output Frame Number** is set to **Enabled**, the number of the frame in which the symbol was first decoded is attached to the symbol output information. The output format is “Fnnn”, where “nnn” is a 3-digit decimal value from 0 to 255. The frame number rolls over to 0 once it passes 255.

If this feature is enabled, the frame information will follow the symbol data, and it will precede any symbol quality data (if symbol quality settings are enabled—see [Symbol Quality Separator](#) on page 9-5). The symbol quality separator is located between the end of the already-formatted data and the “F” that precedes the frame number.

### Output Coordinates

*Serial Cmd:* <**K734,output frame number,output coordinates**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

#### Disabled

When **Output Coordinates** is set to **Disabled**, the coordinates are not output as part of the symbol data.

#### Enabled

When **Output Coordinates** is set to **Enabled**, the four sets of object coordinates for the first successfully decoded symbol are attached to the symbol data output in the following format:

“(nnn,mmm)”, where “nnn” is a 3-digit X-coordinate and “mmm” is a 3-digit Y-coordinate. The validation separator is located between the end of the already formatted data and the first coordinate point. The point with the lowest X + Y sum will be output first, followed by the next three points in a clockwise direction.

*Example:*

(032,040)(287,056)(287,279)(048,271)

# Image Output

**Usage:** This feature allows the user to select what read cycle condition triggers the image file output.

**Definition:** Used to output an image file when a specified read cycle condition has been met, such as No Read or Good Read. When the read cycle is complete, the normal read cycle output will occur, including any configured postamble or preamble data. The read cycle will check if image output is enabled, and if the specified read cycle condition has been met. If both these conditions are true, the image file will be output to the user-specified communication port in the user-specified image file format.

**Serial Cmd:** <**K739,image output mode**,communication port,file format,JPEG quality>

**Default:** **Disabled**

**Options:** **0 = Disabled**

1 = Good Read

2 = No Read

3 = No Read or Good Read

4 = Mismatch

## Good Read

If a Good Read condition is met during the read cycle, the image file corresponding with the first Good Read will be output. The image file will immediately follow the read cycle output and postambles. For a Good Read condition to occur, all symbols in the read cycle must qualify.

## No Read

If a No Read condition occurs during the read cycle, the image file corresponding with the first No Read will output. The image file will immediately follow the read cycle output and postambles. There are conditions in which the read cycle may have a No Read condition but the image will *not* be output. For example, if the read cycle is looking for two No Read symbols in the same image capture but one is a Good Read, the image will not be output, because it is not considered a No Read image.

**Note:** A **Cap Absence** or **Tube Absence** will qualify for image output when **No Read** is selected. In a **Multi-Operation** read cycle with output set to **As Soon As Possible**, only the results from the last operation are retained. Therefore, if two operations are active, the first resulting in a No Read condition and the second *not* resulting in a No Read condition, no image will be stored.

## No Read or Good Read

If a No Read condition or a Good Read condition occurs, the first image of either kind will be output.

## Mismatch

If a Good Read occurs during the read cycle but the image is a Mismatch condition, the first Mismatch image will be output.

## Communication Port

**Definition:** This setting selects the communication port through which the image file will be transferred to the host.

**Serial Cmd:** <K739,image output mode,**communication port**,file format,JPEG quality>

**Default:** Host

**Options:** 0 = Host                      1 = Auxiliary                      2 = USB

## File Format

**Definition:** This setting selects the format of the image file to be output.

Note: If JPEG is the chosen image file format, the resolution of the image will be determined by the setting in the **JPEG Quality** field.

**Serial Cmd:** <K739,image output mode,communication port,**file format**,JPEG quality>

**Default:** JPEG

**Options:** 0 = Bitmap                      1 = JPEG                      2 = Binary

## JPEG Quality

**Definition:** This setting determines the quality of JPEG image compression. The user may select a value from 1 (lowest) to 100 (highest).

**Serial Cmd:** <K739,image output mode,communication port,file format,**JPEG quality**>

**Default:** 90

**Options:** 1 to 100 (percent)

## **Image Output Example**

The following example assumes that the imager is set to output on No Read, and that it is in a Rapid Capture mode of 3 captures.

**Number of Symbols:** 1  
**Frame # 1:** No Read  
**Frame # 2:** No Read  
**Frame # 3:** No Read  
**Read Cycle Result:** No Read  
**Output Frame:** **Frame # 1**

**Number of Symbols:** 1  
**Frame # 1:** No Read  
**Frame # 2:** No Read  
**Frame # 3:** Good Read  
**Read Cycle Result:** Good Read  
**Output Frame:** **None**

**Number of Symbols:** 2  
**Frame # 1:** No Read  
**Frame # 2:** No Read  
**Frame # 3:** Good Read, Symbol # 1  
**Read Cycle Result:** No Read  
**Output Frame:** **Frame # 1**

## Database Identifier Output

*Usage:* Useful in keeping track of which database entries read which symbols.  
*Serial Cmd:* <K759,status,separator>  
*Default:* 0  
*Options:* 0 = Disabled 1 = Enabled

### Output Status

#### Disabled

When this command is disabled, no database identifier information will be output.

#### Enabled

When this command is enabled, the imager will append a two-digit number and the characters “DB” to the data output following the separator for each symbol decoded using **IP Database**. For example, if the separator is an underscore character and the second database entry reads a symbol encoded with “data capture” during the read cycle, the symbol data output will be “data capture\_DB02”. If the database is not active, no identifiers will be attached to output.

### Separator

*Usage:* The separator character separates the symbol data from the database identifier.  
*Serial Cmd:* <K759,status,separator>  
*Default:* <space>  
*Options:* Any ASCII character

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <K759h,,3C>

For >: <K759h,,3E>

For , : <K759h,,2C>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

# Quality Output

## Separator

*Definition:* The separator character separates quality output data from symbol data.

*Serial Cmd:* **<K704,separator,decodes/trigger status>**

*Default:* ,

*Options:* Any ASCII character

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: **<K704h,3C>**

For >: **<K704h,3E>**

For , : **<K704h,2C>**

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Decodes per Trigger Status

*Definition:* When this feature is enabled, the imager enters a state where it processes frames as configured until the end of a read cycle, with or without a successful symbol decode. When the read cycle ends, the imager outputs any decoded symbol data along with the decodes per trigger count.

*Serial Cmd:* **<K704,separator,decodes/trigger status>**

*Default:* **0**

*Options:* **0 = Disabled**                      1 = Enabled

---

## Power On / Reset Counts

**Note:** Power On / Reset Counts is a read-only command.

### Power-On

*Serial Cmd:* <K406,power-on,resets,power-on saves,power-on flash saves,power-on tube/cap library saves>

**Power-On** uses a 16-bit counter that increments each time the imager is powered-on.

### Resets

*Serial Cmd:* <K406,power-on,resets,power-on saves,power-on flash saves,power-on tube/cap library saves>

**Resets** uses a 16-bit counter that increments each time the imager is reset. This value is reset at power-on.

### Power-On Saves

*Serial Cmd:* <K406,power-on,resets,power-on saves,power-on flash saves,power-on tube/cap library saves>

**Power-On Saves** uses a 16-bit counter that increments each time an imager setting is saved for power-on with a <Z> command.

### Power-On Flash Saves

*Serial Cmd:* <K406,power-on,resets,power-on saves,power-on flash saves,power-on tube/cap library saves>

**Power-On Flash Saves** uses a 16-bit counter that increments each time an imager setting is saved to the customer parameter section of flash memory with a <Zc> command.

### Power-On Tube/Cap Library Saves

*Serial Cmd:* <K406,power-on,resets,power-on saves,power-on flash saves,power-on tube/cap library saves>

**Power-On Tube/Cap Library Saves** uses a 16-bit counter that increments each time an imager setting is saved to the Tube/Cap Library parameter section of flash memory with a <Z1> command.

## Time Since Reset

**Note:** **Time Since Reset** is a read-only command.

### **Hours**

*Serial Cmd:* <K407,hours,minutes>

*Default:* **16-bit counter** (0 to 65535)

**Hours** uses a 16-bit counter that increments every 60 minutes.

### **Minutes**

*Serial Cmd:* <K407,hours,minutes>

*Default:* **16-bit counter** (0 to 60)

**Minutes** uses a 16-bit counter that increments every 60 seconds.

**Note:** Time counts are reset at power-on, but not with an <A> or <Z> command.

## Service Message

When **Service Message** is enabled, a message of up to 10 ASCII characters is sent whenever the system detects that the service timer's limit has been reached. The service timer is reset at power-on, meaning that the service timer's limit is the amount of time since last reset. Service timer increments can be set in seconds or minutes.

*Serial Cmd:* <**K409**,*status*,*service message*,*threshold*,*resolution*>

*Default:* **0**

*Options:* **0 = Disabled**                      1 = Enabled

## Service Message

*Serial Cmd:* <**K409**,*status*,**service message**,*threshold*,*resolution*>

*Default:* **SERVICE**

*Options:* An ASCII string between 1 and 10 characters.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <**K409h**,**,3C**>

For >: <**K409h**,**,3E**>

For , : <**K409h**,**,2C**>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Threshold

*Serial Cmd:* <**K409**,*status*,*service message*,**threshold**,*resolution*>

*Default:* **300** (5 minutes)

*Options:* 1 to 65535

## Resolution

*Serial Cmd:* <**K409**,*status*,*service message*,*threshold*,**resolution**>

*Default:* **Seconds**

*Options:* **0 = Seconds**                      1 = Minutes

## EZ Trax Output

**Usage:** Useful for when you want to configure EZ Trax output using serial commands instead of the EZ Trax graphic interface.

**Definition:** When EZ Trax output is enabled, the imager will attempt to output all enabled EZ Trax options. EZ Trax will not function unless enabled.

**Serial Cmd:** `<K757,status,comm port,image mode,image format,JPEG quality,object info output,grade output,color>`

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

### Comm Port

**Definition:** Selects the communication port that will be used to transfer image files.

**Serial Cmd:** `<K757,status,comm port,image mode,image format,JPEG quality,object info output,grade output,color>`

**Default:** **Host**

**Options:** **0 = Host**                      1 = Aux                      2 = USB

### Host Port

Sends output using the current Host Port.

### Aux Port

Sends output using the Auxiliary Port.

### USB

Sends output using a USB connection.

## Image Mode

**Definition:** Determines which read cycle condition triggers image file output.

**Serial Cmd:** <K757,status,comm port,**image mode**,image format,JPEG quality,object info output,grade output,color>

**Default:** **Disabled**

**Options:** **0 = Disabled**  
1 = Good Read  
2 = No Read  
3 = No Read and Good Read  
4 = Mismatch

### Good Read

Outputs the first Good Read image in the read cycle. The image file will immediately follow the symbol data.

### No Read

Outputs the first No Read image in the read cycle. The image file will immediately follow the symbol data.

**Note:** If two symbols are present in the same image capture and one of them is successfully decoded, no image will be output.

### No Read and Good Read

Outputs the first No Read or Good Read image in the read cycle.

### Mismatch

Outputs the image of the first mismatch condition.

## Image Format

*Definition:* Selects the format of the image output file.

*Serial Cmd:* <**K757**,status,comm port,image mode,**image format**,JPEG quality,object info output,grade output,color>

*Default:* **Compressed**

*Options:* 0 = Lossless                      **1 = Compressed**

## Lossless

A “lossless” image is one that is in a high resolution format, and that will not lose resolution even when manipulated and saved multiple times. When Lossless is enabled, the JPEG Quality setting has no effect.

## Compressed

Outputs the image in JPEG format. Image quality is determined by the JPEG Quality setting.

## JPEG Quality

*Definition:* Sets the amount of JPEG image compression. A value of **1** represents the highest compression and lowest image quality, and **100** represents the lowest compression and highest image quality.

*Serial Cmd:* <**K757**,status,comm port,image mode,image format,**JPEG quality**,object info output,grade output,color>

*Default:* **90**

*Options:* 1 to 100 (percent)

## Object Info Output

*Definition:* If a symbol is decoded during an image capture, the symbol type and other supplementary symbol information is also included.

*Serial Cmd:* <**K757**,status,comm port,image mode,image format,JPEG quality,**object info output**,grade output,color>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

## Grade Output

*Definition:* Symbol quality information will be output in the form of an abbreviated identifier for each read cycle.

*Serial Cmd:* <**K757**,status,comm port,image mode,image format,JPEG quality,object info output,**grade output**,color>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

## Color

*Definition:* The imager will generate and send a color image.

*Serial Cmd:* <**K757**,status,comm port,image mode,image format,JPEG quality,object info output,grade output,**color**>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled





# 9 *Symbol Quality*

## **Contents**


Symbol Quality by ESP.....	9-2
Symbol Quality Serial Commands .....	9-3
Overview of Symbol Quality.....	9-4
Symbol Quality Separator / Data Matrix Output Mode.....	9-5
ISO/IEC 16022 Symbol Quality Output.....	9-7
ISO/IEC 16022 Symbol Quality Output by ESP.....	9-9
Microscan Symbol Quality Output .....	9-10
Microscan Symbol Quality Output by ESP .....	9-13

This section describes how to configure and format symbol quality evaluation parameters.

# Symbol Quality by ESP



Click the **Parameters** button and then the **Symbol Quality** tab.

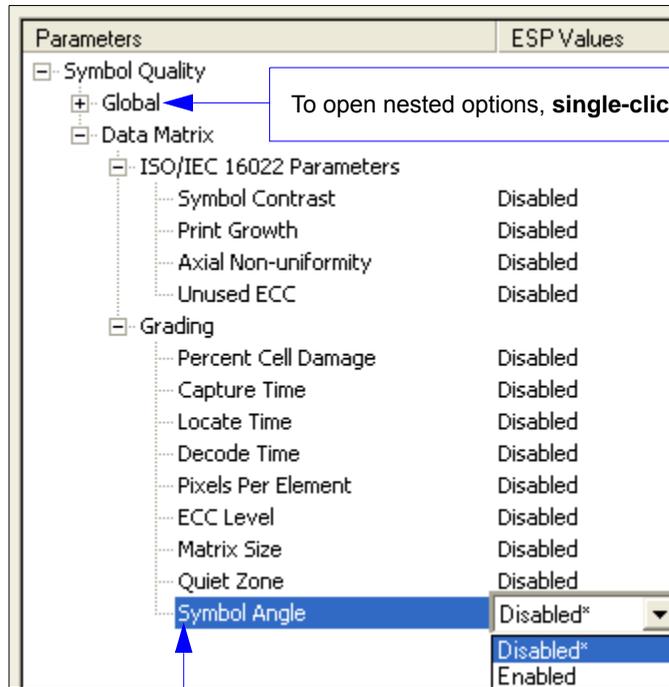

The screenshot shows a software window titled "Parameters" with a sub-tab "ESP Values". The window contains a tree view of settings:

- [-] Symbol Quality
  - [+] Global (indicated by a blue arrow and a callout box: "To open nested options, **single-click** the +.")
  - [-] Data Matrix
    - [-] ISO/IEC 16022 Parameters
      - Symbol Contrast Disabled
      - Print Growth Disabled
      - Axial Non-uniformity Disabled
      - Unused ECC Disabled
    - [-] Grading
      - Percent Cell Damage Disabled
      - Capture Time Disabled
      - Locate Time Disabled
      - Decode Time Disabled
      - Pixels Per Element Disabled
      - ECC Level Disabled
      - Matrix Size Disabled
      - Quiet Zone Disabled
      - Symbol Angle Disabled\* (highlighted in blue, with a blue arrow pointing to it)

The "Symbol Angle" setting is currently set to "Disabled\*" and its dropdown menu is open, showing options: "Disabled\*", "Disabled\*", and "Enabled".

To change a setting, **double-click** the setting and use your cursor to scroll through the options.

## Symbol Quality Serial Commands



Symbol Quality Separator/ Data Matrix Output Mode	< <b>K708</b> ,symbol quality separator,data matrix output mode>
ISO/IEC 16022 Symbol Quality Output	< <b>K709</b> ,symbol contrast,print growth,axial non-uniformity,unused ECC>
Microscan Symbol Quality Output	< <b>K710</b> ,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,ECC level,matrix size,quiet zone,symbol angle>

# Overview of Symbol Quality

Information about symbol quality and timing can be appended to symbol data by enabling specific evaluation parameters. The order in which these values are appended corresponds directly to the order in which they appear in **ESP's Symbol Quality** tree control.

Symbol Quality parameters are separated into ISO/IEC 16022 Symbol Quality Output and Microscan Symbol Quality Output.

**Total Read Time, Symbol Quality Separator, and Output Mode** are common to both ISO/IEC 16022 and Microscan Grading Parameters.

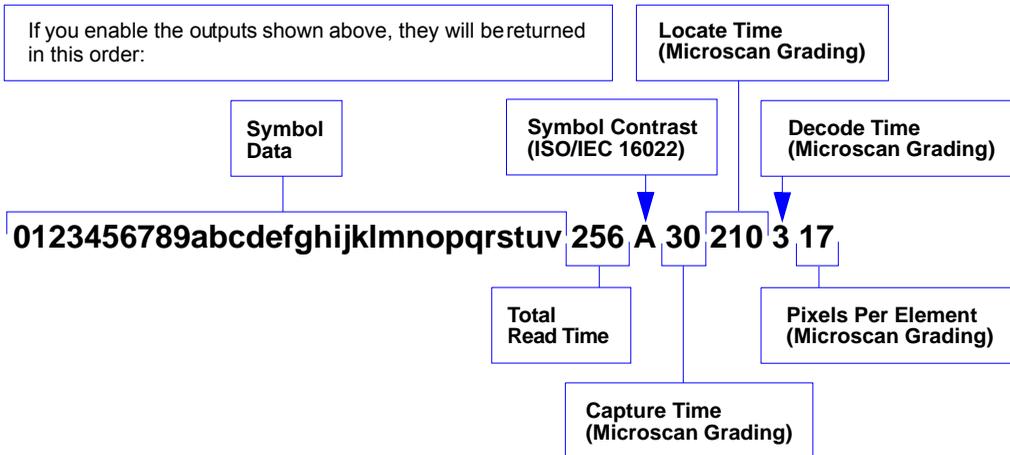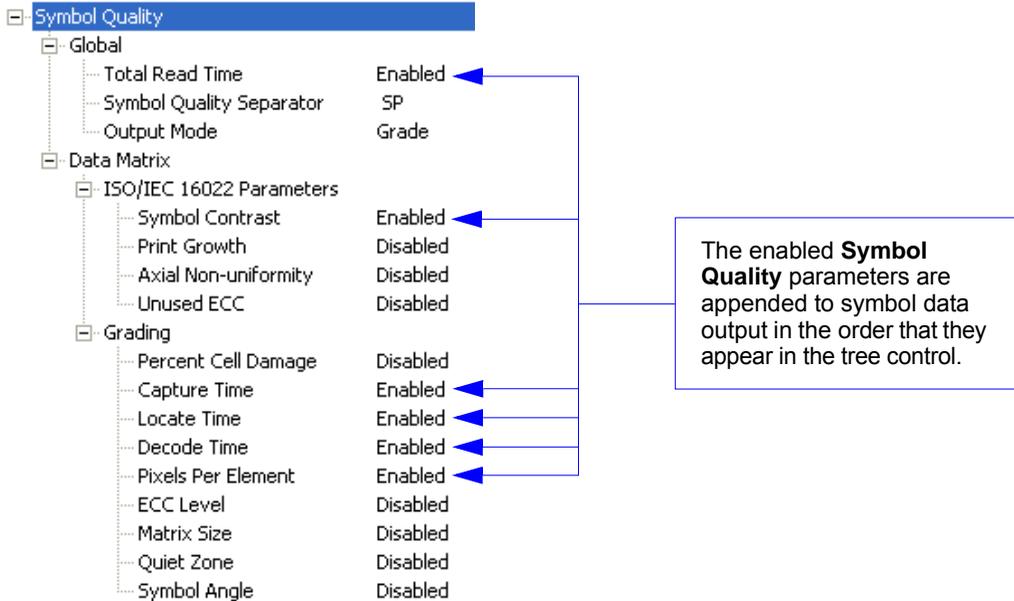

# Symbol Quality Separator / Data Matrix Output Mode

**Symbol Quality Separator** applies to both Symbol Quality groups: ISO/IEC 16022 Symbol Quality Output and Microscan Symbol Quality Output.

## Symbol Quality Separator

**Definition:** Inserts a separator between each enabled field of the symbol quality output.

**Serial Cmd:** <**K708,symbol quality separator,output mode**>

**Default:** <**SP**> (space character)

**Options:** Any ASCII character.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <**K708h,3C**>

For >: <**K708h,3E**>

For , : <**K708h,2C**>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Symbol Quality Separator by ESP

The image shows a configuration window for Symbol Quality Separator. The top part shows a tree view of parameters under 'Symbol Quality' and 'Global'. The 'Symbol Quality Separator' field is highlighted, showing its current value 'SP'. A callout box explains that double-clicking on this field opens the 'Symbol Quality Separator Calculator'. The calculator keypad is shown below, with a grid of ASCII characters. The 'SP' character is selected in the keypad. The keypad includes characters: NUL, SOH, STX, ETX, EOT, ENQ, ACK, BEL, BS, HT, LF, VT, FF, CR, SO, SI, DLE, DC1, DC2, DC3, DC4, NAK, SYN, ETB, CAN, EM, SUB, ESC, FS, GS, RS, US, SP. A note at the bottom of the keypad says 'Click 'Delete' to remove characters.'

## Data Matrix Output Mode

**Note: Output Mode** applies to ISO/IEC 16022 symbol quality parameters.

*Definition:* Output Mode specifies how the four output parameters, if enabled, are formatted.

*Serial Cmd:* <K708,symbol quality separator,**output mode**>

*Default:* **Grade**

*Options:* **0 = Grade**                      1 = Value

### Grade

If in **Grade Mode**, a grade (A,B,C,D) is appended to the symbol data.

### Value

If in **Value Mode**, the calculated value for the given parameter is appended to the symbol data.

# ISO/IEC 16022 Symbol Quality Output

Symbol Quality Parameters for Data Matrix symbols specified by ISO/IEC 16022.

## Symbol Contrast

**Usage:** Lets the user know if contrast settings are less than acceptable.

**Definition:** All the pixels that fall within the area of the test symbol, including its required zone, will be sorted by their reflectance values to select the darkest 10% and the lightest 10% of the pixels. The arithmetic mean of the darkest and the lightest pixels is calculated and the difference of the two means is the Symbol Contrast.

(ANSI) Symbol Contrast grading is defined this way:

A (4.0) if SC > 70%

B (3.0) if SC > 55%

C (2.0) if SC > 40%

D (1.0) if SC > 20%

F (0.0) if SC < 20%

If enabled, the symbol contrast is appended to the symbol data according to the **ISO/IEC 16022 Symbol Quality Output Mode** setting.

**Serial Cmd:** <K709,symbol contrast,print growth,axial non-uniformity,unused ECC>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Print Growth

**Definition:** The extent to which dark or light markings appropriately fill or exceed their module boundaries. These values are determined by counting pixels in the clock pattern of the binary digitized image, then comparing it to a nominal value and minimum and maximum values. The print growth grade is defined in this way:

A (4.0) if  $-.050 < PG < 0.50$

C (2.0) if  $-.085 < PG < 0.85$

B (3.0) if  $-.070 < PG < 0.70$

D (1.0) if  $-.10 < PG < 1.00$

F (0.0) if  $PG < -1.00$  or  $PG > 1.00$

If enabled, the print growth is appended to the symbol data according to the **ISO/IEC 16022 Symbol Quality Output Mode** setting.

**Serial Cmd:** <K709,symbol contrast,print growth,axial non-uniformity,unused ECC>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Axial Non-Uniformity (Data Matrix Only)

**Definition:** Axial non-uniformity is a measure of how much the sampling point spacing differs from one axis to another, namely  $AN = \text{abs}(X_{AVG} - Y_{AVG}) / ((X_{AVG} + Y_{AVG})/2)$  where  $\text{abs}()$  yields the absolute value. If a symbology has more than two major axes, then AN is computed for those two average spacings which differ the most. (ANSI) axial non-uniformity grading is defined this way:

A (4.0) if AN < .06	B (2.0) if AN < .08
C (2.0) if AN < .10	D (1.0) if AN < .12
F (0.0) if AN > .12	

If enabled, the axial non-uniformity is appended to the symbol data according to the **ISO/IEC 16022 Symbol Quality Output Mode** setting.

**Serial Cmd:** <K709,symbol contrast,print growth,axial non-uniformity,unused ECC>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Unused Error Correction (Data Matrix Only)

**Definition:** The correction capacity of Reed-Solomon decoding is expressed in the equation:  $e + 2d < d - p$ , where  $e$  is the number of erasures,  $d$  is the number of ECC code words, and  $p$  is the number of code words reserved for error detection.

A (4.0) if UEC > .62	B (3.0) if UEC > .50
C (2.0) if UEC > .37	D (1.0) if UEC > .25
F (0.0) if UEC < .25	

If enabled, the unused ECC is appended to the symbol data according to the **ISO/IEC 16022 Symbol Quality Output Mode** setting.

**Serial Cmd:** <K709,symbol contrast,print growth,axial non-uniformity,unused ECC>


**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled


# ISO/IEC 16022 Symbol Quality Output by ESP

ESP's **Symbol Quality** interface allows you to evaluate Data Matrix symbols for compliance with ISO/IEC 16022 requirements.

First, determine which ISO/IEC 16022 Parameters you need to evaluate, using the **Symbol Quality** tree control.

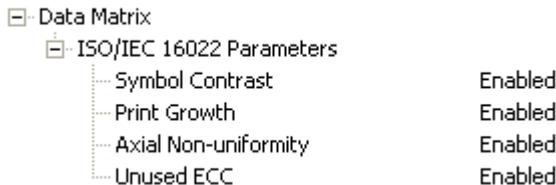

Once you've set these Data Matrix evaluation parameters, go to the **Preferences** tab and set your Data Matrix Grading Report output preferences.

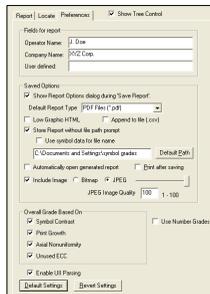

After your output preferences are set, click the **Data Matrix Grading** button.

Data Matrix Grading

There will be a wait of a few seconds, and then the evaluation results will appear at the lower right of the **Symbol Quality** view, in a format similar to the one shown below.

Data Matrix Grading Report						GRADE
ISO/IEC 16022:	Symbol Contrast	= 80 %				A
	Print Growth	= 0.26	Dx - 51 %	Dnon - 50 %		A
			Dy - 54 %	Dmax - 65 %		
	Axial Nonuniformity	= 0.00	Kavg - 13.2	Dmin - 35 %		A
	Unused ECC	= 100 %	Vavg - 13.1			
GRADING:	% Cell Damage	= 0 %	Eact - 0			A
	Total Read Time	= 99 ms	Emax - 10			
	Capture Time	= 65 ms				
	Locate Time	= 27 ms				
	Decode Time	= 7 ms				
	Pixels/Element	= 13.1				
	ECC Level	= 200				
	Matrix Size	= 14x14				
	Quiet Zone	= PASS				

If you want to view the results in a report format, click the **Generate Report** button. The report will be output in the format you chose in the **Preferences** dialog (**Default Report Type**).

Save Report...

# Microscan Symbol Quality Output

## Percent Cell Damage (Data Matrix Only)

**Definition:** When this feature is enabled, the cell damage percentage is appended to data output.

**Serial Cmd:** <K710,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,ECC level,matrix size,quiet zone,symbol angle>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Total Read Time

**Definition:** The time that transpires between the image capture and the output of the decoded data, including locate time.

When enabled, the total read time is appended to the symbol data.

**Serial Cmd:** <K710,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,ECC level,matrix size,quiet zone,symbol angle>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Capture Time

**Definition:** Capture time (in milliseconds) is a fixed “overhead” that includes the time of capture and transfer of the image.

When enabled, the capture time is appended to the symbol data.

**Serial Cmd:** <K710,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,ECC level,matrix size,quiet zone,symbol angle>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Locate Time

**Definition:** The time in milliseconds from the start of image processing until the symbol has been located and is ready to be decoded.

When enabled, the locate time is appended to the symbol data.

**Serial Cmd:** <K710,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,ECC level,matrix size,quiet zone,symbol angle>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## Decode Time

- Definition:** The time in milliseconds required to decode a symbol.  
When enabled, the decode time is appended to the symbol data.
- Serial Cmd:** <**K710**,percent cell damage,total read time,capture time,locate time,**decode time**,pixels per element,ECC level,matrix size,quiet zone,symbol angle>
- Default:** **Disabled**
- Options:** **0 = Disabled** 1 = Enabled

## Pixels Per Element (Data Matrix Only)

- Definition:** The number of pixels for each element, either dark or light for both **x** and **y** directions.  
When enabled, the pixels per element value is appended to the symbol data.
- Serial Cmd:** <**K710**,percent cell damage,total read time,capture time,locate time,decode time,**pixels per element**,ECC level,matrix size,quiet zone,symbol angle>
- Default:** **Disabled**
- Options:** **0 = Disabled** 1 = Enabled

## ECC Level (Data Matrix Only)

- Definition:** Outputs the Data Matrix ECC level.  
When enabled, the ECC level is appended to the symbol data.
- Serial Cmd:** <**K710**,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,**ECC level**,matrix size,quiet zone,symbol angle>
- Default:** **Disabled**
- Options:** **0 = Disabled** 1 = Enabled

## Matrix Size (Data Matrix Only)

- Definition:** Defines the symbol matrix size, in number of pixels in both the **x** and **y** axis.  
When enabled, the matrix size value is appended to the symbol data.
- Serial Cmd:** <**K710**,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,ECC level,**matrix size**,quiet zone,symbol angle>
- Default:** **Disabled**
- Options:** **0 = Disabled** 1 = Enabled




# Microscan Symbol Quality Output by ESP

ESP's **Symbol Quality** interface allows you to evaluate Data Matrix symbols for compliance with a rigorous set of standards, such as Locate Time, Capture Time, and Decode Time.

First, determine which parameters you want to evaluate, using the **Symbol Quality** tree control.

[-] Grading	
Percent Cell Damage	Disabled
Capture Time	Disabled
Locate Time	Disabled
Decode Time	Disabled
Pixels Per Element	Disabled
ECC Level	Disabled
Matrix Size	Disabled
Quiet Zone	Disabled
Symbol Angle	Disabled

Once you've set these evaluation parameters, go to the **Preferences** tab and set your Data Matrix Grading Report output preferences.

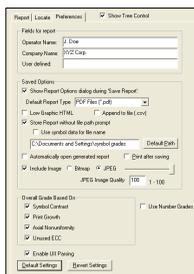

After your output preferences are set, click the **Data Matrix Grading** button.

Data Matrix Grading

There will be a wait of a few seconds, and then the evaluation results will appear at the lower right of the **Symbol Quality** view, in a format similar to the one shown below.

Data Matrix Grading Report				GRADE	
ISO/IEC 16022:	Symbol Contrast	= 80 %	Dx - 51 %	Dnom - 50 %	A
	Print Growth	= 8.26	Dy - 54 %	Dmax - 65 %	A
	Axial Nonuniformity	= 0.00	Xavg - 13.2	Dmin - 35 %	A
	Unused ECC	= 100 %	Yavg - 13.1		A
GRADING:	% Cell Damage	= 0 %	Rect - 0		
	Total Read Time	= 99 ms	Emax - 10		
	Capture Time	= 65 ms			
	Locate Time	= 27 ms			
	Decode Time	= 7 ms			
	Pixels/Element	= 13.1			
	ECC Level 1	= 200			
	Matrix Size	= 14x14			
	Quiet Zone	= PRSS			

If you want to view the results in a report format, click the **Generate Report** button. The report will be output in the format you chose in the **Preferences** dialog (**Default Report Type**).

Save Report...





# 10 Matchcode

## Contents

- Matchcode by ESP ..... 10-2
- Matchcode Serial Commands ..... 10-2
- Overview of Matchcode ..... 10-3
- Matchcode Type ..... 10-4
- Match Replace..... 10-9
- Mismatch Replace..... 10-10
- New Master Pin ..... 10-11

This section explains the EZ Match Imager’s matchcode output functions and the master symbol database setup.

# Matchcode by ESP



Click the **Parameters** button and then the **Matchcode** tab.

To change a setting, **double-click** the setting and use your cursor to scroll through the options.

Parameters	ESP Values
[-] Matchcode	
Matchcode Type	Disabled
Sequential Matching	Increment
Match Start Position	0
Match Length	1
Wild Card	*
Sequence on Noread	Enabled*
Sequence on Mismatch	Disabled
New Master Pin	Enabled*
[-] Match Replace	Disabled
Replacement String	MATCH
[+] Mismatch Replace	Disabled

To open nested options, **single-click** the +.

## Matchcode Serial Commands

Matchcode Type	<K223,matchcode type,sequential matching,match start position,match length,wild card character,sequence on No Read,sequence on mismatch>
Number of Master Symbols	<K224,number of master symbols>
New Master Pin	<K225,status>
Enter Master Symbol Data	<K231,master symbol number,master symbol data>
Request Master Symbol Data	<K231?,>[for all] or <K231?,master symbol number>
Delete Master Symbol Data	<K231,master symbol number,>
Match Replace	<K735,status,match replacement string>
Mismatch Replace	<K736,status,mismatch replacement string>

# Overview of Matchcode

**Definition:** **Matchcode** allows the user to store master symbol data in the imager's memory, compare that data against other symbol data, and define how symbol data and/or discrete signal output will be directed.

A master symbol database can be set up for up to 10 master symbols.

**Note:** **Matchcode** will function with multiple symbols; however, if **Matchcode Type** is set to **Sequential** or if **Triggering Mode** is set to **Continuous Read 1 Output**, the imager will behave as if **Number of Symbols** were set to 1, regardless of the user-defined configuration.

**Usage:** Matchcode is used in applications to sort, route, or verify data based on matching the specific symbol in a variety of ways as defined in this section. For example, a manufacturer might sort a product based on dates that are embedded in the symbol.

## Steps for Entering and Using Master Symbols


1. Set **Triggering Mode** to **External** or **Serial**.
2. Choose the method of symbol comparison that fits your application.
3. Define the output you want to achieve with your matchcode setup:
  - a. Symbol data output
  - b. Discrete output
4. Select the number of master symbols you want to create.
5. Decide which of 4 ways you want to enter your master symbol(s):
  - a. Use **ESP** to type master symbol data directly.
  - b. Send a serial command with symbol data in the form of **<M231, master symbol#, data>**.
  - c. Send a **<G>** (Read Next Symbol as Master Symbol) command.
  - d. Enable the **New Master Pin** command and activate the discrete input to store the next symbol read as the master symbol.

# Matchcode Type

**Definition:** Allows the user to choose the way that master symbols will be compared with subsequently read symbols.

**Note:** First set **Triggering Mode** to **External** or **Serial** in the **Read Cycle** tree control.

**ESP:**

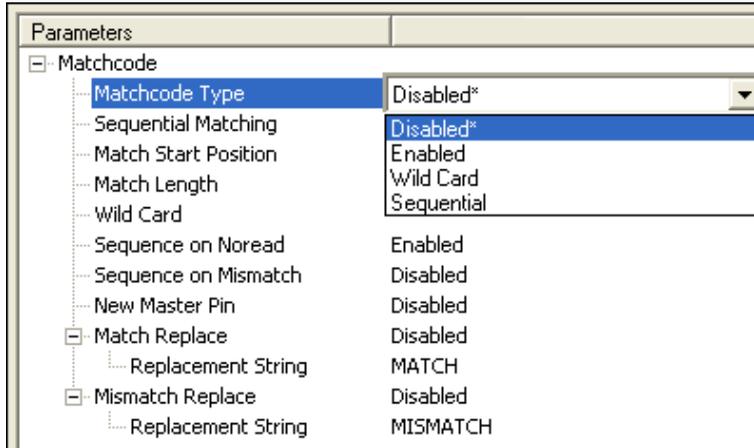

**Serial Cmd:** <K223,**matchcode type**,sequential matching,match start position,match length,wild card character,sequence on No Read,sequence on mismatch>

**Default:** **Disabled**

**Options:** **0 = Disabled**  
1 = Enabled  
2 = Wild Card  
3 = Sequential

**Disabled:** Has no effect on operations.

**Enabled:** Instructs the imager to compare symbols or portions of symbols with the master symbol.

**Wild Card:** Allows the user to enter user-defined wild card characters in the master symbol.

**Sequential:** Instructs the imager to sequence after each match (numeric only) and compare symbols or portions of symbols for sequential numbers.

**Note:** If **Matchcode Type** is set to **Sequential**, the imager will behave as if **Number of Symbols** were set to **1**, regardless of the user-defined configuration.

## Sequential Matching

- Usage:** Useful in tracking product serial numbers that increment or decrement sequentially.
- Definition:** With **Sequential** enabled, **Sequential Matching** determines if a count is in ascending (incremental) or descending (decremental) order.
- Serial Cmd:** <**K223**,matchcode type,**sequential matching**,match start position,match length,wild card character,sequence on No Read,sequence on mismatch>
- Default:** **Increment**
- Options:** **0 = Increment**                      1 = Decrement

## Match Start Position

- Usage:** **Match Start Position** is useful in defining specific portions of a symbol for comparison. For example, if a symbol contains a part number, manufacturing date, and lot code info, but you are only interested in the part number information, you can set the imager to sort only the part number and ignore the other characters.
- Definition:** **Match Start Position** determines the portions of symbols that will be matched by defining the first character in the symbol (from left to right) that will be compared with those of the master symbol, when **Matchcode Type** is set to **Enabled** or **Sequential**.
- Function:** For example, if **Match Start Position** is set to **3**, the first 2 characters read in the symbol will be ignored and only the 3rd and subsequent characters to the right will be compared, up to the number of characters specified by **Match Length**.
- Serial Cmd:** <**K223**,matchcode type,sequential matching,**match start position**,match length,wild card character,sequence on No Read,sequence on mismatch>
- Default:** **0**
- Options:** 0 to 3000

**Note:** **Match Start Position** must be set to **1** or greater to enable this feature. A **0** setting will disable this feature.

## Match Length

- Usage:** *Example:* If **Match Length** is set to **6** in a 10-character symbol, and **Match Start Position** is set to **2**, only the 2nd through 7th characters (from left to right) will be compared.
- Definition:** Defines the length of the character string that will be compared with that of the master symbol when **Match Start Position** is set to **1** or greater. When **Match Start Position** is set to **0**, no comparison will occur.
- Serial Cmd:** <**K223**,matchcode type,sequential matching,match start position,**match length**,wild card character,sequence on No Read,sequence on mismatch>
- Default:** **1**
- Options:** 1 to 3000

## Wild Card Character

**Usage:** *Example:* With **Wild Card Character** defined as the default asterisk, defining **CR\*34** as the master symbol will result in matches for CR134 and CR234, but not CR2345. Entering the wild card at the end of the master symbol, as in **CR\***, will result in matches for variable symbol lengths such as CR1, CR23, CR358, etc.

**Definition:** Wild Card Character allows a user to define a wild card character as part of the master symbol.

**Serial Cmd:** <**K223**,matchcode type,sequential matching,match start position,match length,**wild card character**,sequence on No Read,sequence on mismatch>

**Default:** \* (asterisk)

**Options:** Any ASCII character.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs:

For <: <**K223h**,,,,,**3C**>

For >: <**K223h**,,,,,**3E**>

For , : <**K223h**,,,,,**2C**>

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.









## New Master Pin

**Definition:** If **Matchcode** and **New Master Pin** are enabled and the new master pin is momentarily connected to ground (must be held low for a minimum of 10 ms) master symbol information will be loaded into the database based on the next read cycle that achieves a Good Read, starting with **Index 1**. The **Master Symbol Database** will be loaded with all symbols decoded in the read cycle as long as it does not exceed the **Number of Master Symbols** parameter.

**Serial Cmd:** <K225,status>

**Default:** Disabled

**Options:** 0 = Disabled 1 = Enabled

## New Master Load Status

**Definition:** The new master status responds with the number of the next master position to be loaded, where 0 represents “idle” or “no master to be loaded.”

**Example:** If the user has the **Number of Master Symbols** set to 1, and then either sends a <G> or toggles an active **New Master Pin**, the state will be 1, and prior to reading and effectively loading position 1, the response to <NEWM> would be <NEWM/1>. Once a symbol has been read and loaded, the status will be cleared: <NEWM/0>.

**Serial Cmd:** <NEWM>

---

*New Master Pin*

# ■ 11 Camera and IP Setup

## Contents

Camera and IP Setup by ESP .....	11-2
Camera and IP Setup Serial Commands.....	11-3
Video.....	11-4
Evaluation .....	11-5
Calibration.....	11-9
Window of Interest.....	11-10
IP Database.....	11-14
Dynamic Setup .....	11-15
Camera Settings.....	11-16
Focal Distance (Read-Only).....	11-17
Focal Distance Table (Read-Only).....	11-17
Pixel Sub-Sampling .....	11-18
IP Threshold .....	11-18
IP Mode .....	11-21
Tube/Cap Mode.....	11-22
Image Processing Timeout.....	11-24
Background Color.....	11-25
Mirrored Image .....	11-26
Hollow Mode.....	11-27
Number of Symbols in Field of View.....	11-28
Damaged Symbol Status .....	11-29
Illumination Brightness.....	11-30
Skew Correction .....	11-31
Color Filter (EZ Match Color Only).....	11-34
Color Detection (EZ Match Color Only).....	11-35

This section provides adjustment parameters for the physical controls of the camera, image acquisition, database settings, and image diagnostics.

# Camera and IP Setup by ESP



Click the **Setup** button to bring up the **Camera Setup** menu.

Parameters	ESP Values
[-] Camera Setup	
Color Filter	General Purpose*
[-] Camera Settings	Disabled
Gain	General Purpose*
Shutter Speed	Horizontal 1D Symbols
Illumination Brightness	High
Focus Distance	
Sub-sampling	
+ Window of Interest	
+ Image Processing Settings	

To change a setting, **double-click** the setting and use your cursor to scroll through the options.

To open nested options, **single-click** the **+**.

# Camera and IP Setup Serial Commands

Image Processing Timeout	<K245,image processing timeout>
IP Threshold	<K512,threshold mode,fixed threshold value,cycle min,cycle max,cycle step,adaptive contrast percent>
Mirrored Image	<K514,mirrored image>
Window of Interest	<K516,row pointer,column pointer,row depth,column width>
Hollow Mode	<K517,hollow mode status>
Number of Symbols in Field of View	<K518,number of symbols in field of view>
Damaged Symbol Status	<K519,damaged symbol status>
Focal Distance (Read-Only)	<K525,focal distance>
Focal Distance Table (Read-Only)	<K526,number of focal distances,focal distance>
IP Mode	<K527,IP Mode,FLM direction>
Tube/Cap Mode	<K533,tube/cap direction,tube/cap rotation,cap unknown qualify,tube/cap presence before output,cap unknown presence before output>
Illumination Brightness	<K536,brightness>
Skew Correction	<K537,line speed,symbol direction>
Camera Settings	<K541,shutter speed,gain>
Pixel Sub-Sampling	<K542,sub-sampling>
Color Processing	<K543,color filter>
Color Detection	<K544,status,color match resolution>

# Video

The **Video** view is similar to the **EZ Mode** interface, in that the user has the ability to perform the same **Locate**, **Calibrate**, and **Test** routines.

**Video** also features **Capture and Decode** functionality, which is similar to the **Parameters** interfaces (**Communication**, **Read Cycle**, **Symbologies**, **I/O Parameters**, **Symbol Quality**, **Matchcode**, and **Diagnostics**).

The screenshot shows the Video interface with several callout boxes explaining the functions of the buttons and the data table. The interface includes buttons for Locate, Calibrate, Capture and Decode, Test, and Stop. A central video display shows a QR code with a green bounding box. Below the video display is a table with columns for Attribute and Value. The table contains the following data:

Attribute	Value
Number of Symbols	1
Symbol #1	
Symbol Data	Microscan

Callout boxes provide the following information:

- Locate:** Activates the imager's target pattern and initiates live video display of the symbol in the field of view.
- Calibrate:** Initiates Calibration routine.
- Capture and Decode:** Allows the user to take an image capture of the symbol in the field of view at any time, and to decode the symbol data. Similar to the **Capture and Decode** function in the **Configuration** views.
- Test:** Initiates the **Test** routine. Allows the user to test the imager's Read Rate and decodes per second, and also displays decoded symbol data in the field at the bottom of the screen. Click **Stop** to end the **Test** routine.
- Decodes per Second:** When enabled, shows the symbol in higher contrast than the default contrast value.
- Contrast:** When enabled, shows the symbol in higher contrast than the default contrast value.
- Table:** Symbol data and **Test** results are shown in this field.

# Evaluation

In **Evaluation**, you can view images currently in the imager, capture and decode a symbol, save it as a digital file, and perform histogram and line scan evaluations.

When you click on the **Evaluation** tab, you will see the images that are currently stored in the imager.

Click **Receive** to refresh this view.

Click **Capture/Decode** to display the current stored image. Only one capture and decode event will occur, regardless of read cycle settings.

Click **Read** to trigger a read cycle. If there is enough time in the read cycle, up to 32 Good Reads (or 6 full-scale images) can be captured and displayed, depending on the size of the images, and depending on the number enabled in **Number of Captures** under **Capture Mode** in the **Camera Setup** menu tree to the left of the tabs.

If you click **Save**, the current image will be saved to the location of your choice.

**Note:** An image can only be saved in the format in which it was uploaded to **ESP**. JPEG images will be saved as **.jpg**, and bitmaps will be saved as **.bmp**.

When you click the **JPEG Image** box, notice that the **Line Scan** button is grayed out.

The JPEG option allows faster captures and transfers, but since the JPEG standard compresses image data, it is not suitable for the more rigorous demands of line scan evaluation.

JPEG also allows you to adjust the image quality (resolution) by adjusting the sliding tab between 1 and 100, 1 being the lowest quality and 100 being the highest.

When possible, use the highest quality; when image transfer speed must be increased, use a lower image quality setting. Adjustments for this setting will depend on your specific hardware and software limitations.



## Histogram

**Usage:** Useful in determining quality and contrast of symbols.

**Definition:** A histogram is a graphic representation of the numeric count of the occurrence of each intensity (gray level) in an image. The horizontal axis represents the values of gray levels, and the vertical axis represents the number of pixels for each gray level.


**Note:** Since histograms are performed in the imager, the results will be saved regardless of whether the image was uploaded as a JPEG (.jpg) or a bitmap (.bmp).

1. From the **Evaluation** window, click the **Histogram** button.

The current image is transferred into the histogram operation. This may take a moment, since all the relevant pixels are being evaluated intensively.

2. When the **Histogram** window opens, you may need to expand the window and/or adjust the scroll bars in order to bring the image into view.
3. To generate a histogram, click and drag your cursor diagonally across the symbol or a portion of the symbol.

The image will be surrounded by an “area of interest box”, a dashed blue line with red anchor points that can be selected and moved by placing a cursor inside the box, and can be resized by clicking and dragging the anchor points.

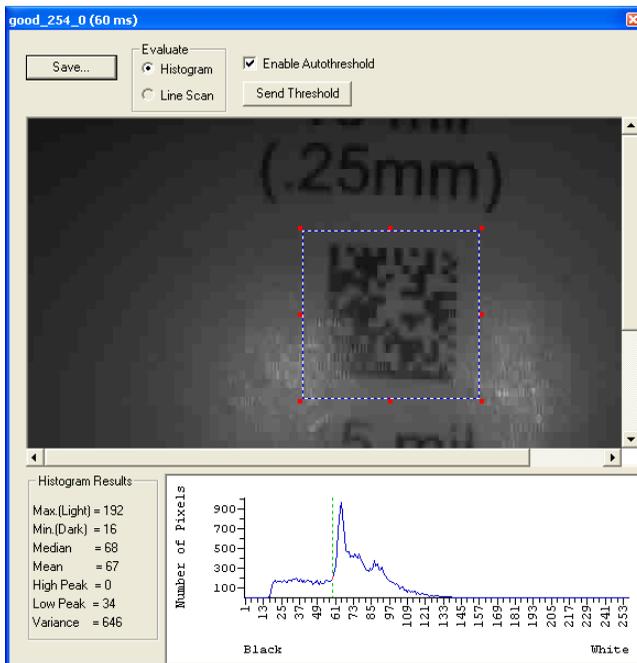

## ***Threshold (Histogram)***

**Enable Autothreshold** is checked by default.

To adjust the threshold manually,


1. Uncheck the **Enable Autothreshold** box.
2. Move the threshold marker (vertical green dashed line) in the **Histogram** chart.

**Hint:** This should be midway between the maximum and minimum curves.

3. Click on the **Send Threshold** button to adopt the new threshold position.

## Line Scan

1. From the **Evaluation** tab, click the **Line Scan** button. A window like that shown below will appear.
2. Drag your cursor *horizontally* across the image.  
This will create a dashed horizontal line. Pixel information and a visual representation of the dark and light pixels will be displayed below the image.

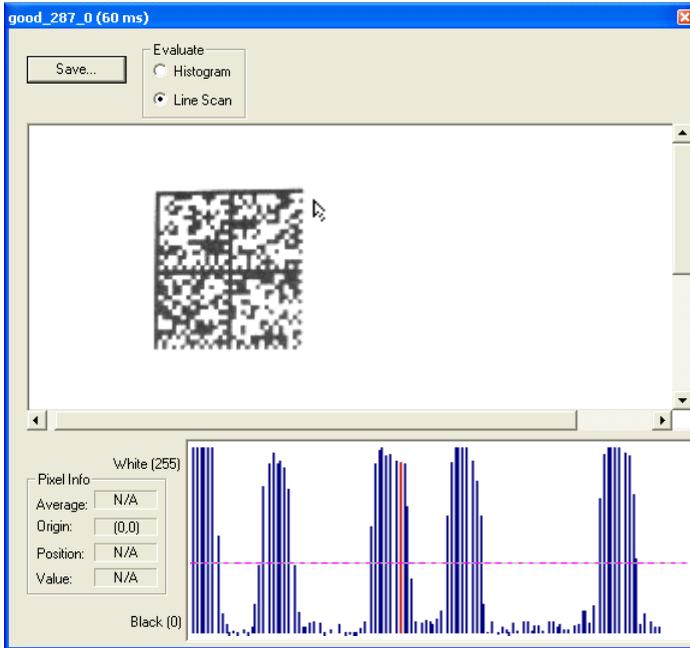

When you center your cursor over the dashed line, it becomes a double arrow cross. This allows you to move the line anywhere in the window. You can also use your keyboard arrows to move the line incrementally in any direction.


As with the histogram, the line scan compares light and dark pixels, but in a spatial distribution. On the **Y** axis of the graph below, **0** is black and **255** is white; the **X** axis represents the horizontal axis of the symbol as described by the line scan.

When you click anywhere on the graph, a vertical red line appears at that point and its position and value (in terms of black-to-white) are updated in the **Pixel Info** table to the left of the graph (237 in this example). In addition, a horizontal dashed red line is displayed that indicates the average value.


# Calibration

The Calibration interface in **ESP** is a powerful and intuitive way to optimize the imager's performance. It allows the user to control several complex, simultaneous calibration operations, and to follow the progress of those operations using cues such as progress bars, real-time representations of calibration values, and other dynamic user feedback.

See Chapter 5, [Calibration](#), for full documentation of this feature.

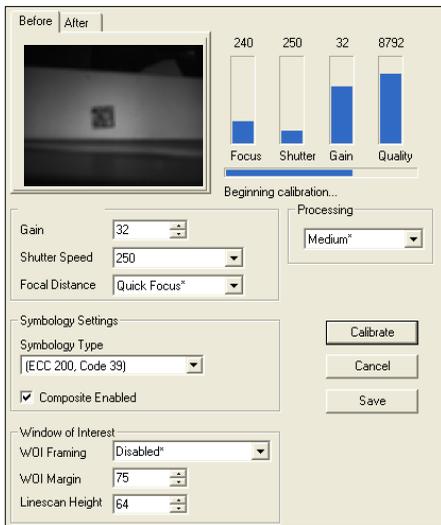

*ESP's Calibration interface shown during a calibration routine*

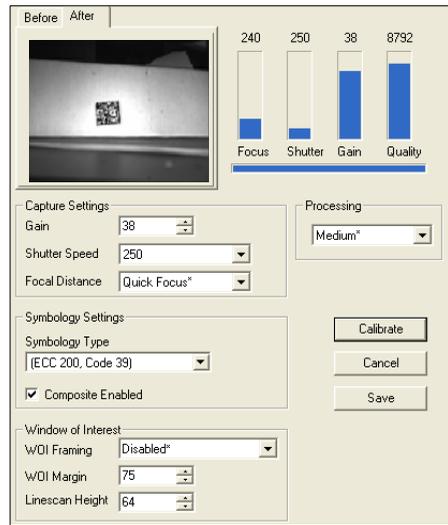

*ESP's Calibration interface shown after a calibration routine*

## Window of Interest

The active pixel area of the image sensor is called the **Window of Interest** (WOI). The WOI allows the user to select an area of the field of view in which the desired symbol is located.

The programmable window of interest increases decode speed, improves threshold, and makes it easy to select specific symbols from among several in the field of view. The user provides the upper-left pixel location and the size of the window to define the Window of Interest.

<input type="checkbox"/> Window of Interest	
Top	0
Left	0
Height	1024
Width	1280

**Caution: Window of Interest** will shrink the field of view and therefore could cause symbols to be missed in dynamic applications.

## Window of Interest by ESP

1. From the **Camera** menu, click the **WOI** tab to bring up **Window of Interest**.



If you haven't already captured an image, click the **Capture and Decode** button to decode the present image. If successful, the **Good Read** indicator on the **WOI** tab will be green and the symbol will appear in the pane below.

**Note:** You can resize the image by clicking and dragging the **ESP** window from the lower right corner. This is useful where very small symbols are being read.

2. Click and drag your cursor over the symbol that you want to isolate for reading.  
Notice that the surrounding area goes black.

You can use the handles on the image area that you have just drawn to resize the region of interest. You can also click on the center of the window of interest and move it.

3. Test the new settings in **Read Rate Mode**.

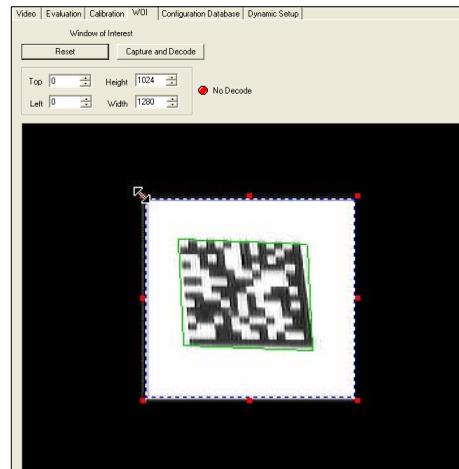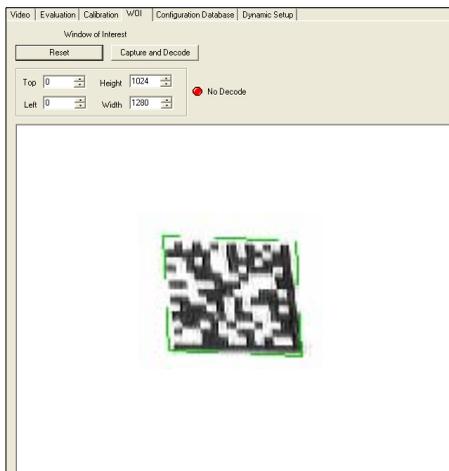


**Note:** To remove the window of interest, click the **Reset** button or just click anywhere in the WOI pane.

Note that all pixels *not* in the WOI are defined as black.

Because the imager has far less processing to do in a smaller window, Read Rates typically increase dramatically. One possible downside is that the chance of missing a symbol increases with the smaller window. Always verify that your WOI will be large enough to allow for any random movement of symbols in your field of view.

## Window of Interest by Serial Command

The figure below shows where to locate the start position of the row and column pointers and how to measure the column depth and row width dimensions.

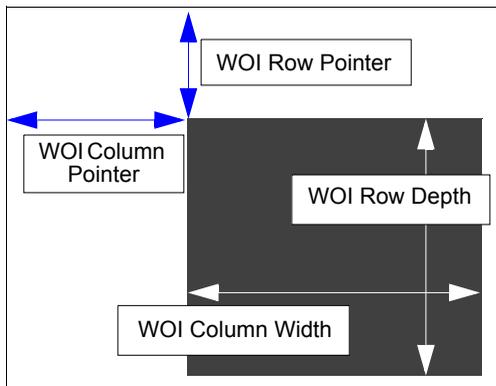

### Top (Row Pointer)

**Definition:** Defines the row position of the upper-left starting point of the window.

**Serial Cmd:** <**K516**,row pointer,column pointer,row depth,column width>

**Default:** 0

**Options:** Monochrome EZ Match: 0 to (1024 – row depth)  
EZ Match Color: 0 to (832 – row depth)

### Left (Column Pointer)

**Definition:** Defines the column position of the upper-left starting point of the window.

**Serial Cmd:** <**K516**,row pointer,column pointer,row depth,column width>

**Default:** 0

**Options:** Monochrome EZ Match: 0 to (1280 – column width)  
EZ Match Color: 0 to (2048 – column width)

**Important:** The column pointer setting must be an even value. If a user enters an odd value, it will be decreased automatically to the nearest even value. For example, if a user enters a setting of **101**, it will automatically be reduced to **100** (although a user request for this setting would still show **101**).

## Height (Row Depth)

*Definition:* Defines the size, in rows, of the window. Maximum value is defined as the maximum row size of the image sensor minus the **Top** value.

*Serial Cmd:* <**K516**,row pointer,column pointer,**row depth**,column width>

*Default:* **Monochrome EZ Match: 1024**

**EZ Match Color: 832**

*Options:* Monochrome EZ Match: 3 to (1024 – row pointer)

EZ Match Color: 3 to (832 – row pointer)

## Width (Column Width)

*Definition:* Defines the column position of the upper-left starting point of the window.

*Serial Cmd:* <**K516**,row pointer,column pointer,row depth,**column width**>

*Default:* **Monochrome EZ Match: 1280**

**EZ Match Color: 2048**

*Options:* Monochrome EZ Match: 8 to (1280 – column pointer)

EZ Match Color: 8 to (2048 – column pointer)

**Important:** The column width value must be a modulus 8 value. If a user enters a non-modulus 8 value, it will be decreased automatically to the nearest modulus 8 value. For example, if a user enters a setting of **639**, it will automatically be reduced to **632** (although a user request for this setting would still show **639**).

# IP Database

The IP Database allows the user to manage multiple configuration profiles. It is a useful tool in applications that require several different imager configurations to be applied sequentially, and it allows the user to perform far more complex operations than would be possible with only one set of configuration parameters.

See Chapter 12, [IP Database](#), for full documentation of this feature.

The screenshot shows the IP Database configuration window. At the top, there is a dropdown for 'Active Indexes' set to 5, a checked checkbox for 'Auto Sync Database settings with Reader', and an 'Advanced Options...' button. The main area is divided into 'Capture Settings' and 'Processing Settings'. Below these are two rows of settings: 'Current' and a list of 10 indexes. The first index (Index 1) is selected and highlighted in yellow. The 'Capture Settings' for Index 1 are: Capture Index (250), Shutter Speed (20), Gain (Disabl), Sub-sampling (0), Top (0), Left (0), Height (1024), Width (1280). The 'Processing Settings' for Index 1 are: Threshold Mode (Adapti), Fixed Threshold Value (128), Processing Mode (Stand), Narrow Margins (Disabl), Background (White), and Symbol Type (Disabled). At the bottom, there are checkboxes for 'Capture for Every Index' (checked) and 'Show Database Index in Output' (unchecked), along with buttons for 'Calibrate...', 'Receive Settings', 'Send Settings', 'Load Current To Index', and 'Load Index To Current'.

Index	Capture Index	Shutter Speed	Gain	Sub-sampling	Top	Left	Height	Width	Threshold Mode	Fixed Threshold Value	Processing Mode	Narrow Margins	Background	Symbol Type
1	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
2	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
3	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
4	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
5	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
6	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
7	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
8	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
9	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled
10	250	20	Disabl	0	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabled

IP Database view, set for 5 Active Indexes, with Capture Settings highlighted

## Dynamic Setup

**Dynamic Setup** is used to calculate image capture timing during a read cycle. Without proper timing, the imager will not be able to decode all symbols in a read cycle. An external trigger is used to activate image captures so the user can make timing adjustments as capture events occur.

The screenshot shows the 'Dynamic Setup' window with a video feed of a barcode. A blue progress bar on the right indicates the 'Read Rate' at 100%. Below the video feed are three spin boxes for 'Capture #' (set to 1), 'Number of Captures' (set to 6), and 'Number of Symbols' (set to 1). Below these are a 'Delay (Sec)' field showing '0.066464', a 'Delay Adjustment' section with 'Coarse' selected, and a slider with 'Decrease' and 'Increase' buttons.

The user can control **Capture #**, **Number of Captures**, and **Number of Symbols** using these spin boxes.

**Read Rate** is represented graphically in real-time as the user makes adjustments to the time delay between image captures.

The **Delay Adjustment** slider allows the user extremely precise control of the time delays between image captures in a read cycle. Delay values are shown in seconds in the field above the slider. The **Coarse** and **Fine Delay Adjustment** options determine whether larger or smaller adjustment increments will be used.

# Camera Settings

Camera parameters are typically obtained during the calibration process, and do not necessarily need to be modified directly.

## Shutter Speed

**Usage:** Faster shutter speeds reduce blurring in faster applications. Slower shutter speeds are useful in slower applications and lower contrast applications.

**Definition:** Sets the exposure or integration time for the image sensor pixels. The shutter speed setting in relation to the speed of the object is critical. If a slow shutter speed is selected to capture fast-moving objects, blurring or smearing of the image will occur. As shutter speed is increased, more light and gain become necessary, because the pixels' exposure time has decreased.

**Serial Cmd:** <K541,shutter speed,gain>

**Default:** 45

**Options:** 15 to 12,500

## Gain

**Usage:** Can be used to adjust pixel grayscale values for readability.

**Definition:** Sets the gain value for the image sensor. This setting can be configured through calibration, which is the recommended method. A higher gain value will increase the brightness of the image, but the visual noise reduction performance of the system is reduced. Before configuring gain settings, the desired shutter speed should already be set and the gain should be configured to optimize the shutter speed setting.

Each of the image sensor's colors has a separate gain setting, and the White Balance adjustment provides gain offsets for color channels **R** (red), **G** (green), and **B** (blue) to provide consistent white across the image. Adjustments to both the R and B channels are usually required. The gain value that is set here is the base gain value for all colors. If a color requires additional gain to provide white balance, the offset is added to this gain value. However, when in the analog gain range, the gain + offset cannot exceed 42, and when in the digital gain range, the gain + offset cannot exceed 48. For optimal white balance, avoid setting gain near these values.

**Note:** Microscan recommends using only the analog gain range (0 to 42). Image quality is degraded within the digital gain range (43 to 48).

**Serial Cmd:** <K541,shutter speed,gain>

**Default:** 30

**Options:** Analog gain: 0 to 42

Digital gain: 43 to 48

## Focal Distance (Read-Only)

*Definition:* This command returns the imager's factory preset focal distance.  
*Serial Cmd:* <**K525,focal distance**>  
*Default:* **400** (4")  
*Options:* N/A (Focal Distance is factory preset.)

## Focal Distance Table (Read-Only)

### *Number of Focal Distances*

*Definition:* Specifies the number of focal distances supported by the imager (1).  
*Serial Cmd:* <**K526,number of focal distances,focal distance**>  
*Default:* **1**  
*Options:* N/A (Focal Distance is factory preset.)

### *Focal Distance*

*Definition:* Returns the Imager's factory preset focal distance.  
*Serial Cmd:* <**K526,number of focal distances,focal distance**>  
*Default:* Returns the imager's factory preset Focal Distance value.  
*Options:* N/A (Focal Distance is factory preset.)

# Pixel Sub-Sampling

**Definition:** The camera can be enabled to sub-sample pixels in the specified image frame. Sub-sampling can be set to either 4:1 or 16:1. These ratios signify the sampling rate.

**Usage:** `<K542,sub-sampling>`

**Default:** **Disabled**



**Options:** **0 = Disabled**

1 = 4:1

2 = 16:1


## 4:1

At this sampling rate, 1 pixel is output for every 4 pixels sampled. The image will be sampled 2:1 vertically and 2:1 horizontally, for a combined 4:1 ratio. An image with dimensions of 640 x 480 will be scaled to 320 x 240.

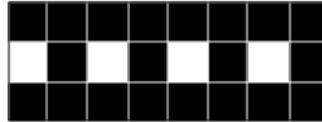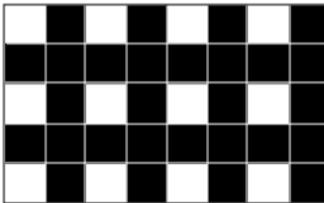

## 16:1

At this sampling rate, 1 pixel is output for every 16 pixels sampled. The image will be sampled 4:1 vertically and 4:1 horizontally, for a combined 16:1 ratio. An image with dimensions of 640 x 480 will be scaled to 160 x 120.

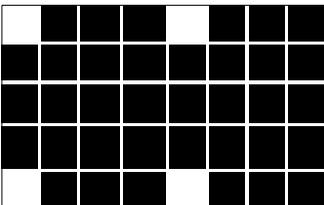



## Cycle Max

*Definition:* Ending value of the cycle mode.

*Serial Cmd:* <**K512**,threshold mode,threshold value,cycle min,**cycle max**,cycle step,adaptive contrast percent>

*Default:* **255**

*Options:* 0 to 255

**Important:** Cycle Max must be a greater numerical value than Cycle Min.

## Cycle Step

*Definition:* The numerical value of a single cycle mode increment.

*Serial Cmd:* <**K512**,threshold mode,threshold value,cycle min,cycle max,**cycle step**,adaptive contrast percent>

*Default:* **10**

*Options:* 0 to 255

## Adaptive Contrast Percent

*Definition:* A percentage value that adjusts the adaptive threshold map; useful in decoding underprinted or overprinted symbols.

*Example:* If an adaptive contrast value of 110 is set, then the adaptive threshold will be 110% of the original contrast values.

*Serial Cmd:* <**K512**,threshold mode,threshold value,cycle min,cycle max,cycle step,**adaptive contrast percent**>

*Default:* **100**

*Options:* 1 to 200 (percent)



## Tube/Cap Mode

### Tube/Cap Direction

*Serial Cmd:* <K533,tube/cap direction,tube/cap rotation,cap unknown qualify,tube/cap presence before output,cap unknown presence before output>

*Default:* **Right**

*Options:* **0 = Right** 1 = Left

#### Right

The tube or cap points to the right.

#### Left

The tube or cap points to the left.

### Tube/Cap Rotation

*Serial Cmd:* <K533,tube/cap direction,tube/cap rotation,cap unknown qualify,tube/cap presence before output,cap unknown presence before output>

*Default:* **Static (Decapper Gate)**

*Default:* **Rotating (Divert Gate)**

*Options:* **0 = Static** 1 = Rotating

#### Static

The tube or cap is static while being read (i.e., not rotating). This is the **Decapper Gate** default.

#### Rotating

The tube or cap rotates while being read. This is the **Divert Gate** default.

### Cap Unknown Qualify

*Serial Cmd:* <K533,tube/cap direction,tube/cap rotation,cap unknown qualify,tube/cap presence before output,cap unknown presence before output>

*Default:* **End of Operation**

*Options:* 0 = ASAP 1 = End of Operation

#### As Soon as Possible (ASAP)

When this mode is selected, a “Cap Unknown” condition is qualified as soon as it is detected and meets the qualification requirements.

#### End of Operation

When this option is selected and a “Cap Unknown” condition is detected, it will not qualify until the end of the operation. This allows more opportunity for a “Cap Present” condition to be detected.

## **Tube/Cap Presence Before Output**

- Definition:** This value specifies the minimum number of times a tube or cap needs to be read to qualify as a Good Read.
- Serial Cmd:** <**K533**,tube/cap direction,tube/cap rotation,cap unknown qualify,**tube/cap presence before output**,cap unknown presence before output>
- Default:** **3**
- Options:** 1 - 255

## **Cap Unknown Presence Before Output**

- Definition:** This value specifies the minimum number of times an unknown cap needs to be read in order to qualify as a Good Read.
- Serial Cmd:** <**K533**,tube/cap direction,tube/cap rotation,cap unknown qualify,tube/cap presence before output,**cap unknown presence before output**>
- Default:** **2**
- Options:** 1 - 255

## Image Processing Timeout

**Usage:** Useful in higher speed applications where image processing time is long enough that not all captures have an opportunity to be processed.

**Definition:** Specifies the maximum amount of time to process a captured image. When the timeout expires, the image processing is aborted. This timeout works in both **Rapid Capture** and **Continuous Capture** modes, as well as with the IP Database.

**Serial Cmd:** **<K245,image processing timeout>**

**Default:** **5,000 ms** (5 sec.)

**Options:** 1 to 65535 (in 1ms increments)

### Notes:

- The timeout period does not include capture time.
- If a timeout occurs during processing and no symbols in the field of view have been decoded, the image will be recorded as a No Read. For this reason, a longer timeout should be tried to ensure that the symbol is decoded successfully.

# Background Color

*Usage:* Symbol backgrounds are often **White**, or other very light colors. If the background is darker than the symbol, **Black** background should be enabled.

*Definition:* Allows the user to specify the symbol background used in the application.

*Serial Cmd:* <**K451,background color**>

*Default:* **White**

*Options:* **0 = White**                      1 = Black

## **White**

When **White** background is enabled, the bars of linear symbols and the elements of 2D symbols are recognized as dark on a light background.

## **Black**

When **Black** background is enabled, the bars of linear symbols and the elements of 2D symbols are recognized as light on a dark background.

## **Mirrored Image**

*Usage:* Enable this setting when the imager is viewing a mirrored image (as when it is being used with a right-angle mirror attachment).

*Definition:* When enabled, outputs a mirrored image of the symbol.

*Serial Cmd:* **<K514,mirrored image>**

*Default:* **Both (auto-detect)**

*Options:* 0 = Regular Image  
1 = Mirrored Image

**2 = Both (auto-detect normal/mirrored)**

### ***Regular Image***

When **Regular Image** is enabled, images will be processed as they appear upon capture.

### ***Mirrored Image***

When **Mirrored Image** is enabled, images will be processed as a reverse of the captured image.

### ***Both Regular and Mirrored***

When **Both** is enabled, regular and mirrored images will be processed.

# Hollow Mode

**Usage:** Used to determine which kind of data matrix elements will be processed.


**Definition:** When set to **Regular Elements**, the imager will decode data matrix symbols with solid elements but will not decode data matrix symbols with hollow elements. When set to **Hollow Elements**, the imager will decode data matrix symbols with outlined, hollow elements but will not decode data matrix symbols with solid elements.

**Serial Cmd:** **<K517,hollow mode status>**

**Default:** **Regular Elements**

**Options:** **0 = Regular Elements**                      1 = Hollow Elements

The image below is an example of a data matrix symbol with hollow elements.

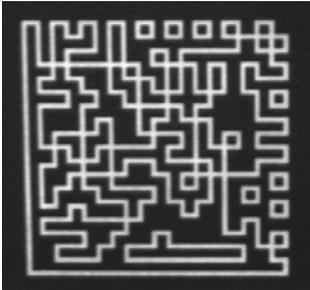

## Number of Symbols in Field of View

*Definition:* This command allows the user to determine how **FLM** will behave in relation to the candidate symbols in the field of view.

*Serial Cmd:* **<K518,number of symbols in field of view>**

*Default:* **Any number of symbols**

*Options:* **0 = Any number of symbols**

1 = One symbol

2 = More than one symbol

**Note:** When the number of symbols in the field of view is set to **1**, codeword stitching from all scaled image processes is allowed for PDF417 and MicroPDF417.

**Note:** This variable is used in **Fast Linear Mode**. **FLM** usually considers the whole image as one candidate, but when **Number of Symbols in Field of View** is set to **2**, **FLM** will try to locate the candidates first and then decode. The symbols cannot be side-by-side—they must be parallel.



# **Illumination Brightness**

*Definition:* This feature allows the user to adjust the brightness of the illumination LEDs. Since the imager has control over the brightness of the illumination, it can provide consistent brightness output between imagers through a factory calibration operation. Each of the brightness settings is calibrated to provide the same level of intensity for each imager.

*Usage:* **<K536,brightness>**

*Default:* **High**

0 = Off

1 = Low

*Options:* 2 = Medium

**3 = High**

4 = Constant


## ***Constant***

When set to **Constant**, the illumination is the same as the Medium setting. However, the LEDs will always be on during a read cycle and will only be off between read cycles. This cuts down on perceptible LED flashing.

# Skew Correction

The EZ Match Imager's CMOS image sensor has a "rolling shutter" mechanism that controls pixel integration row-by-row, unlike a global shutter, which performs light integration of all pixels at once. When a row of pixels has integrated light for the amount of time specified by the user-defined shutter speed, that row will be read out. The rows of the image are exposed individually in rapid sequence.


As a symbol moves through the field of view, it is in a different position at each row read-out. This creates distortion, or "skew", as in the image shown below. In this image, the symbol is moving from left to right at a line speed of 40 inches per second. The bottom of the symbol is read out first while the upper portion is still being integrated, causing distortion along the symbol's **x-axis**.

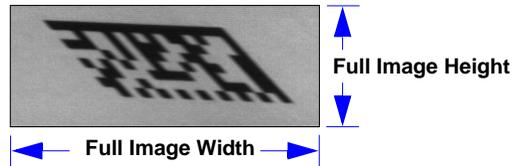

**Note:** The amount of blur in the image is an effect of shutter speed, and is not a factor in rolling shutter distortion.

If the symbol enters the imager's field of view from the top or bottom, distortion will occur on the **y-axis**. The image below shows two symbols entering the field of view from the top at different line speeds. As you can see, this causes the image to shrink along the **y-axis**. This is because the symbol is moving perpendicular to the CMOS sensor's row read-out. In other words, the bottom of the symbol is read out first, and as the symbol moves information is lost (the symbol enters pixel rows that have already been processed). This causes the symbol to appear to shrink vertically.

**Note:** If the symbol were to enter the field of view from the bottom, the captured image would be stretched along the **y-axis**.

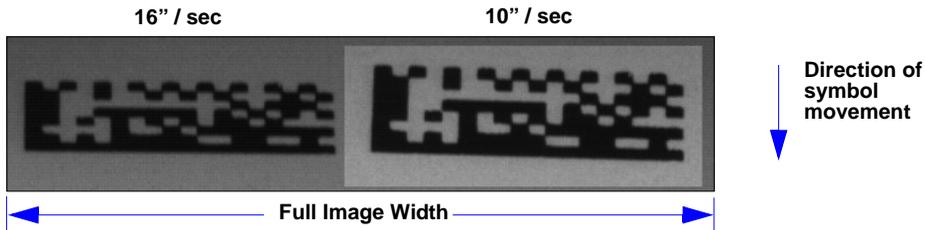

The amount of rolling shutter distortion depends upon the amount of time it takes to read out an image row, and the line speed at which the target object is traveling. Therefore, one way to reduce skew is to speed up the read-out time per pixel row. This can be accomplished by reducing the column size of the image sensor.

For example, if the column size is reduced from 640 to 320, the time it takes to read out a row of pixels from the sensor is reduced by half, and image skew will be reduced by a factor of 2. As the column dimension of the image is reduced, the effect of rolling shutter distortion is reduced by the same factor.

**Important:** Reducing the row size of the image has no effect, because it does not change the row read-out time. Skew will remain the same regardless of row size.

## Line Speed

**Definition:** This feature is used to specify the line speed of the application, and it determines how much distortion correction to apply. When enabled, this feature will cause the overall decode rate to increase significantly. The timing information in the table below is for a full megapixel image (1280 x 1024).

**Note:** Processing time decreases with larger image sizes.

**Usage:** *<K537,line speed,symbol direction>*


**Default:** **0 (Disabled)**

**Options:** 0 to 80 (inches per second)

Line Speed	Additional Processing Time
10" / sec	69.5 ms
20" / sec	65.0 ms
30" / sec	62.5 ms
40" / sec	58.0 ms
60" / sec	55.0 ms
80" / sec	45.5 ms

Distortion is corrected by shifting image rows in the direction opposite the symbol's movement on the line. The shift value of subsequent image rows is then increased. These shift values depend on the speed of the line. The faster the line speed, the greater the required shift values. More data loss is incurred at faster line speeds.

The image shown below was captured at a line speed of 40 inches per second, and it shows virtually no inherent skew. The black area of the image is unusable, since the information was lost as the symbol moved through the imager's field of view.

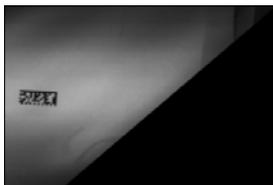

The amount of data loss can be reduced by decreasing the image height or the row size of the image, which reduces the amount of travel represented during the image frame read-out. Note that the amount of distortion will not be changed, because the object will have traveled the same distance during the read-out of the target area.





## Color Filter (EZ Match Color Only)

**Definition:** The EZ Match image sensor captures images in color and then processes them for optimal decode performance. Color image processing requires image captures to be filtered, or the R, G, and B cells to be equalized. This is achieved by applying one of the available filters, or by performing a white balance with the current camera configuration before attempting to decode a symbol. This option specifies the filter method that is applied to the RGB color image to produce a monochrome image.

**Usage:** <K543,color filter>

**Default:** **General Purpose**

**Options:** 0 = Disabled  
1 = **General Purpose**  
2 = Horizontal Linear (1D) Symbols

### **Disabled**

When **Color Processing** is disabled, no filter is applied to the captured image. If you are attempting to decode symbols without a filter, a White Balance may be required to balance the red, green, and blue cells of the image sensor.

### **General Purpose**

When enabled, the **General Purpose** filter is applied to the captured RGB image to produce a gray scale image. The gray scale image can be used in most applications, but the filtering process increases processing time.

The **General Purpose** filter should be used when reading 2D symbols, linear symbols that are not positioned horizontally in the field of view, or a combination of both.

### **Horizontal Linear (1D) Symbols**

When enabled, the filter for **Horizontal Linear (1D) Symbols** is applied to the captured RGB image to produce a gray scale image that is designed specifically to provide the best suitable image for a linear symbol that is horizontally positioned in the field of view.

The **Horizontal Linear (1D) Symbols** filter should be used when reading linear symbols that are positioned horizontally in the field of view.

## Color Detection (EZ Match Color Only)

**Definition:** When **Color Detection** is enabled, color processing and cap color detection are active and color images can be retrieved from the imager.

**Important:** When color processing is enabled, the additional color image storage restricts the maximum full-size image capacity of the imager from **6 to 3**. This is because both a color image and a filtered RGB image are stored for every image capture.

**Usage:** `<K544,status,color match resolution>`

**Default:** **Enabled**

**Options:** 0 = Disabled  
**1 = Enabled**

### Color Match Resolution

**Definition:** Determines how closely a cap color must match the defined requirements. There are four resolutions that can be selected: Basic Color; Hue; Hue and Saturation; or Hue, Saturation, and Value.

**Usage:** `<K544,status,color match resolution>`

**Default:** **Hue and Saturation**

**Options:** 0 = Basic Color  
 1 = Hue  
**2 = Hue and Saturation**  
 3 = Hue, Saturation, and Value

### Basic Color

When **Basic Color** is enabled, only the basic color will be used to determine a match. The Hue value is divided by 30°, resulting in 12 possible color combinations (see below). The basic color is determined by using the Hue value. Hue values that are on the border between two colors will be declared matches.

For example, if a color is defined in the cap library as having a hue value of 253° (blue), and a cap is detected with a hue value of 257° (purple-blue), a match is declared.

Color	Hue Range	
Red	345°	14°
Orange	15°	44°
Yellow	45°	74°
Yellow Green	75°	104°
Green	105°	134°
Blue Green	135°	164°
Cyan	165°	194°
Green Blue	195°	224°
Blue	225°	254°
Purple Blue	255°	284°
Magenta	285°	314°
Purple Red	315°	344°

## Hue

Once the basic color is determined, **Hue** requires that the hue value be within an acceptable range to declare a match. This color match method provides further distinction between basic colors.


## Hue and Saturation

**Saturation** provides information on color vibrancy. A highly saturated color is vivid and intense, while a less saturated color is more muted, as shown in the example below.



## Hue, Saturation, and Value

**Hue, Saturation, and Value** are all used as criteria for determining a color match. This mode allows for the highest color resolution, and is able to detect different pigments, shades, and levels of brightness.

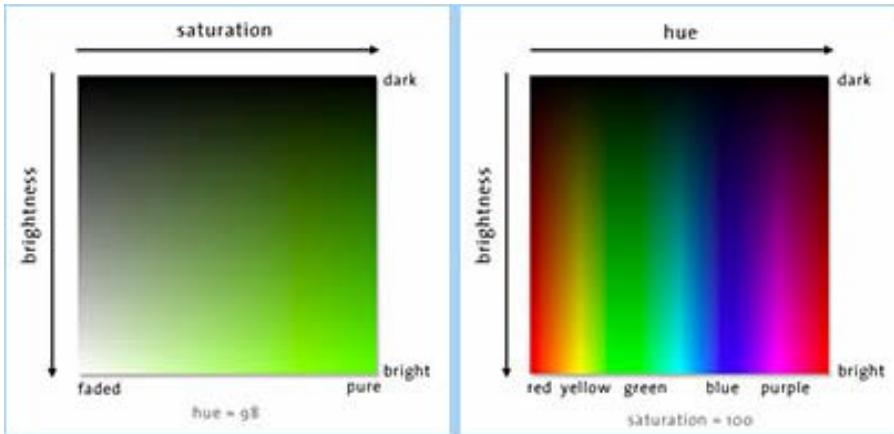

A color's brightness can be changed by selecting a different gain or shutter setting, causing the image to be brighter or darker. This mode is susceptible to large fluctuations in ambient light, so gain and shutter settings should be determined before performing a cap **Learn** operation.

## White, Black, and Gray Color Detection

White, black, and gray are determined by the level of saturation and brightness (value) of the color. Regardless of the **Color Match Resolution** setting, the **Saturation** and **Value** characteristics are examined to determine if the cap color is white, black, or a shade of gray.

# 12 IP Database

## **Contents**

- IP Database Serial Commands ..... 12-2
- Number of Active Indexes ..... 12-3
- IP Database Status..... 12-4
- Database Mode ..... 12-10
- Save Current Settings to IP Database..... 12-15
- Load Current Settings from IP Database..... 12-16
- Request Selected Index Settings ..... 12-17
- Request All IP Database Settings ..... 12-18

This section concerns the various capture settings and processing settings that can be used to fine-tune the EZ Match Imager’s performance in your application.

# IP Database Serial Commands

Number of Active Indexes	<K252,number of active database settings>
IP Database Status	<K255,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value,processing mode,narrow margins,background color,symbology type,color filter,color>
Save Current Settings to Database	<K255+,index>
Load Current Settings from Database	<K255-,index>
Request Selected Index Settings	<K255?,index>
Request All Database Settings	<K255?>
Database Mode	<K256,switch mode,frame count/time,image process looping,image dimensions>

# Number of Active Indexes

**Usage:** Useful for applications that require several different complex imager configurations to be applied sequentially. Multiple database indexes allow you to concatenate configuration profiles, and to perform more complex operations than would be possible with only one set of configuration parameters.

**Definition:** This feature allows you to set the number of database records (groups of settings) that will be used automatically during the read cycle. If **Number of Active Indexes** is set to **0**, only the current imager settings will be used, not database entry settings.

**Note:** This setting has no effect when **Multi-Operation** is in use.

**Serial Cmd:** <K252,number of active indexes>

**Default:** 0 (disabled)

**Options:** 0 to 10

## Number of Active Indexes by ESP

Active Indexes: 5

Click the arrow on the **Active Indexes** dropdown menu and select how many database indexes will be used during the read cycle. (0 to 10).

Processing Settings

1	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
2	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
3	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
4	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
5	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
6	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
7	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
8	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
9	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test
10	250	20	Disabl	0	0	1024	1280	...	Adapti	128	Stand	Disabl	White	Disabled	Test

Capture for Every Index     Show Database Index in Output

Calibrate...    Receive Settings    Send Settings    Load Current To Index    Load Index To Current

# IP Database Status

## Index

**Usage:** Useful for applications that require several different complex imager configurations to be applied sequentially. Multiple database indexes allow you to concatenate configuration profiles, and to perform more complex operations than would be possible with only one set of configuration parameters.

**Definition:** Determines the specific database index that will be used.

**Serial Cmd:** <**K255,index**,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value, processing mode,narrow margins,background color,symbology type,color filter,color>

**Options:** 1 to 10

## Shutter Speed

**Serial Cmd:** <**K255,index**,**shutter speed**,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value, processing mode,narrow margins,background color,symbology type,color filter,color>

**Default:** **45**

**Options:** 15 to 12,500

## Gain

**Serial Cmd:** <**K255,index**,shutter speed,**gain**,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value, processing mode,narrow margins,background color,symbology type,color filter,color>

**Default:** **30**

**Options:** 0 to 48

## Focal Distance

**Serial Cmd:** <**K255,index**,shutter speed,gain,**focal distance**,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value,processing mode,narrow margins,background color,symbology type,color filter,color>

**Default:** **400** (4")

**Options:** 200 to 600

## Pixel Sub-Sampling

*Serial Cmd:* <**K255**,index,shutter speed,gain,focal distance,**sub-sampling**,row pointer, column pointer,row depth,column width,threshold mode,fixed threshold value, processing mode,narrow margins,background color,symbology type,color filter,color>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = 4:1                      2 = 16:1

**Important:** Sub-sampling has no effect when the **Image Dimension** mode is configured as **Region of Interest** in the **Database Mode** command. This is because the **Window of Interest** camera settings are determined by the software based on the **Region of Interest** setup. There is no benefit to sub-sampling to increase processing speed when ROI is configured, because the frame size would need to be increased to make sub-sampling possible.

## Row Pointer

*Definition:* The image dimension settings can be applied as a Window of Interest or a Region of Interest, depending on the image dimension mode selected in the **Database Mode** command.

*Serial Cmd:* <**K255**,index,shutter speed,gain,focal distance,**sub-sampling**,**row pointer**,column pointer,row depth,column width,threshold mode,fixed threshold value,processing mode,narrow margins,background color,symbology type,color filter,color>

*Default:* **0**

*Options:* Monochrome EZ Match: 0 to (1024 – row depth)  
EZ Match Color: 0 to (832 – row depth)

## Column Pointer

*Definition:* The image dimension settings can be applied as a Window of Interest or a Region of Interest, depending on the image dimension mode selected in the **Database Mode** command.

*Serial Cmd:* <**K255**,index,shutter speed,gain,focal distance,**sub-sampling**,row pointer,**column pointer**,row depth,column width,threshold mode,fixed threshold value,processing mode,narrow margins,background color,symbology type,color filter,color>

*Default:* **0**

*Options:* Monochrome EZ Match: 0 to (1280 – column width)  
EZ Match Color: 0 to (2048 – column width)

## Row Depth

*Definition:* The image dimension settings can be applied as a Window of Interest or a Region of Interest, depending on the image dimension mode selected in the **Database Mode** command.

*Serial Cmd:* <**K255**,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,**row depth**,column width,threshold mode,fixed threshold value,processing mode,narrow margins,background color,symbology type,color filter,color>

*Default:* **Monochrome EZ Match: 1024**  
**EZ Match Color: 832**

*Options:* Monochrome EZ Match: 3 to (1024 – row pointer)  
EZ Match Color: 3 to (832 – row pointer)

## Column Width

*Definition:* The image dimension settings can be applied as a Window of Interest or a Region of Interest, depending on the image dimension mode selected in the **Database Mode** command.

*Serial Cmd:* <**K255**,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,**column width**,threshold mode,fixed threshold value,processing mode,narrow margins,background color,symbology type,color filter,color>

*Default:* **Monochrome EZ Match: 1280**  
**EZ Match Color: 2048**

*Options:* Monochrome EZ Match: 8 to (1280 – column pointer)  
EZ Match Color: 8 to (2048 – column pointer)

## Threshold Mode

*Serial Cmd:* <**K255**,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,**threshold mode**,fixed threshold value,processing mode,narrow margins,background color,symbology type,color filter,color>

*Default:* **Adaptive**

*Options:* **0 = Adaptive**                      1 = Fixed

## Fixed Threshold Value

*Serial Cmd:* <**K255**,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,**fixed threshold value**,processing mode,narrow margins,background color,symbology type,color filter,color>

*Default:* **128**

*Options:* 0 to 255

## Processing Mode

*Serial Cmd:* <K255,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value,**processing mode**,narrow margins,background color,symbology type,color filter,color>

*Default:* **Standard**

*Options:* **0 = Standard**                      1 = Mode 1                      2 = Fast Linear Mode

## Narrow Margins

*Serial Cmd:* <K255,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value,processing mode,**narrow margins**,background color,symbology type,color filter,color>

*Default:* **Disabled**

*Options:* **0 = Disabled**                      1 = Enabled

## Background Color

*Serial Cmd:* <K255,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value,processing mode,narrow margins,**background color**,symbology type,color filter,color>

*Default:* **White**

*Options:* **0 = White**                      1 = Black

## Symbology Type

*Definition:* This field allows the user to configure the database to enable specific symbologies for selected database indexes. Symbology-specific parameters must be configured with the appropriate symbology command.

For example, if fixed length Code 128 is required, it must first be set up with the Code 128 command: <K474>.

To select a particular symbology, just add the number value associated with that symbology type.

*Examples:*

If Data Matrix and Code 39 are required, the parameter would be: 2 + 16 = **18**.

If I 2/5, BC412, and DataBar Limited are required, the parameter would be: 128 + 2048 + 16384 = **18560**.

*Serial Cmd:* <K255,index,shutter speed,gain,focal distance,sub-sampling,row pointer,column pointer,row depth,column width,threshold mode,fixed threshold value,processing mode,narrow margins,background color,**symbology type**,color filter,color>

*Default:* **Disabled**

### Disabled

When **Symbology Type** is disabled, the database uses the current **Symbology Type** setup to determine active symbologies.

## **Any Symbology Type (Add 1)**

All symbologies *except* *PharmaCode* are enabled while this database index is being used.

## **Data Matrix (Add 2)**

If enabled, Data Matrix will be active for this database index.

**Important:** The ECC level *must* be configured using the Data Matrix command **<K479>**. If no ECC level has been configured, the imager will not decode Data Matrix symbols.

## **QR Code (Add 4)**

If enabled, QR Code will be active for this database index.

## **Code 128 (Add 8)**

If enabled, Code 128 will be active for this database index.

## **Code 39 (Add 16)**

If enabled, Code 39 will be active for this database index.

## **Codabar (Add 32)**

If enabled, Codabar will be active for this database index.

## **Code 93 (Add 64)**

If enabled, Code 93 will be active for this database index.

## **Interleaved 2 of 5 (Add 128)**

If enabled, Interleaved 2 of 5 will be active for this database index.

## **UPC/EAN (Add 256)**

If enabled, UPC/EAN will be active for this database index.

## **PDF417 (Add 512)**

If enabled, PDF417 will be active for this database index.

## **MicroPDF417 (Add 1024)**

If enabled, MicroPDF417 will be active for this database index.

## **BC412 (Add 2048)**

If enabled, BC412 will be active for this database index.

## **Pharmacode (Add 4096)**

If enabled, *PharmaCode* will be active for this database index.

## DataBar-14 (Add 8192)

If enabled, DataBar-14 will be active for this database index.

**Important:** If the stacked and non-stacked operation is required, the DataBar-14 command must be configured as follows: **<K482,2>**. If the DataBar-14 status parameter in the **<K482>** command is set to either DISABLED or ENABLED, the imager will only read non-stacked DataBar-14 symbols.

## DataBar Limited (Add 16384)

If enabled, DataBar Limited will be active for this database index.

## DataBar Extended (Add 32768)

If enabled, DataBar Extended will be active for this database index.

**Important:** If the stacked and non-stacked operation is required, the DataBar Extended command must be configured as follows: **<K484,2>**. If the DataBar Extended status parameter in the **<K484>** command is set to either DISABLED or ENABLED, the imager will only read non-stacked DataBar Extended symbols.

## Color Filter (EZ Match Color Only)

*Serial Cmd:* **<K255,index,shutter speed,gain,focal distance,sub-sampling,row pointer, column pointer,row depth,column width,threshold mode,fixed threshold value, processing mode,narrow margins,background color,symbology type,color filter,color>**

*Default:* **General Purpose**

*Options:* 0 = Raw (no filter)  
**1 = General Purpose**  
 2 = Horizontal 1D Symbols

## Color (EZ Match Color Only)

*Serial Cmd:* **<K255,index,shutter speed,gain,focal distance,sub-sampling,row pointer, column pointer,row depth,column width,threshold mode,fixed threshold value, processing mode,narrow margins,background color,symbology type,color filter,color>**

*Default:* **Disabled (Database 1)**      **Enabled (Databases 2-10)**

*Options:* 0 = Disabled  
 1 = Enabled

# Database Mode

## Switch Mode

*Definition:* Selects the event that causes the imager to load the next database entry to current, active settings. When **Frame Count/Time** expires and **Image Process Looping** is enabled, the next database entry with modifications to camera settings will be used.

**Note:** The image capture event always occurs when the first database entry is used.

**Note:** The **Switch Mode** setting has no effect on **Rapid Capture Mode**, which always operates in **Number of Image Frames** mode with a frame count of **1**.

*Serial Cmd:* <**K256,switch mode,frame count/time,image process looping,image dimensions**>

*Default:* **1**

*Options:* 0 = Time **1 = Number of Image Frames**

## Time

When **Switch Mode** is set to **Time**, the imager will load the next database entry to current, active settings after a predefined time interval. The timer will start upon use of a database entry. If the timer expires during an image capture event, the timer will not start again until that database entry has been incremented and the new database entry has been loaded to current, active settings.

## Number of Image Frames

When **Switch Mode** is set to **Number of Image Frames**, the database entry is incremented after the predetermined number of image capture events has occurred.

## Frame Count/Time

*Definition:* Indicates the **Number of Image Frames** that must be captured or the amount of **Time** that must transpire before the imager will load the next database index entry.

*Serial Cmd:* <**K256,switch mode,frame count/time,image process looping,image dimensions**>

*Default:* **1** (frames/ms)

*Options:* 1 to 65535

## Image Process Looping

**Usage:** Useful in applications where it is necessary to process a single captured image multiple times using different IP and decode parameters.

**Serial Cmd:** <K256,switch mode,frame count/time,**image process looping**,image dimensions>

**Default:** **Disabled**

**Options:** **0 = Disabled**                      1 = Enabled

### Disabled

When **Image Process Looping** is set to **Disabled**, an image is captured for every database configuration, whether or not any camera settings have been modified.

### Enabled

When **Image Process Looping** is set to **Enabled**, the last captured image frame is re-processed with the new IP and decode parameters. If camera settings have not been changed from the last capture event, and when a database configuration is loaded to current, active settings, no new image is captured.

**Note:** An exception to this is the first database index: a new image is always captured when the first database index is used. When a camera setting has been modified from one database setting to the next, a new image is captured. For example, if all database entries contained the same camera setting values but had different IP and decode parameters, an image frame would only be captured when the first database configuration was used.

# Image Dimensions

**Definition:** Determines how the image dimension parameters will be implemented.


**Serial Cmd:** <**K256**,switch mode,frame count/time,image process looping,**image dimensions**>

**Default:** 0

**Options:** 0 = Window of Interest      1 = Region of Interest

## Window of Interest (WOI) by ESP

When **Image Dimensions** is set to **Window of Interest**, the database image dimension parameters are *camera settings*, and they determine the size of the image to be captured.

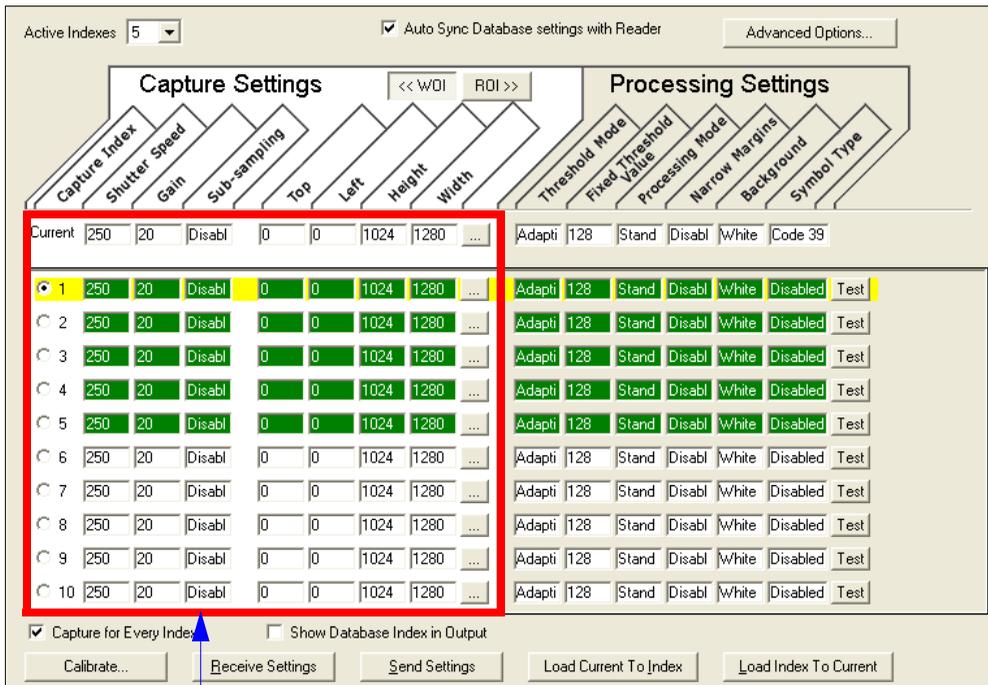


Camera settings (**Capture Index, Shutter Speed, Gain, Sub-Sampling**) located in the left half of the highlighted area.

Image capture dimensions (**Row Pointer, Column Pointer, Row Depth, Column Width**) located in the right half of the highlighted area.

## Region of Interest (ROI)

When **Image Dimensions** is set to Region of Interest, the database image dimension parameters are *IP and decode settings*, and they determine the region or area of the captured image to be processed.

**ROI** coordinate data is based on the full image size. The **WOI** of the captured image will be configured to cover all the ROI settings in the current, active database entry. In the following example, there are three active database settings, each with a different ROI configuration. Their coordinates are based at point 0,0 of the full scale image (1280 x 1024). In this example, **DB1** and **DB3** determine the size of the captured image WOI, while DB2 has no impact. The image WOI is not configurable. It is automatically set up by the database according to the ROI settings.

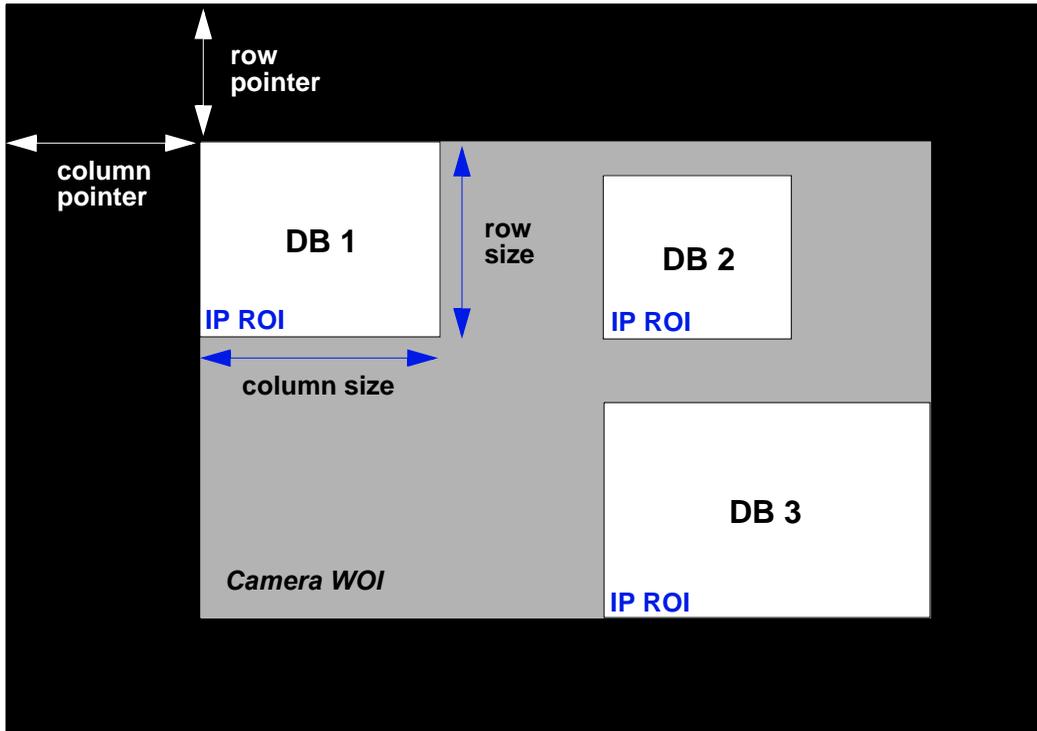

Full Image Size (1280 x 1024)


**Note:** Since the **ROI** parameters are not a camera setting, a change in **ROI** parameters from one index to another does *not* indicate an image capture event.

This feature is intended to be used in conjunction with **Image Process Looping**, to allow different regions of a captured image to be processed using different IP and decode settings.

Also, if this feature is used in conjunction with **Output Filtering**, multiple decoded symbols in a captured image frame can be output according to their location in the field of view.

## Region of Interest (ROI) by ESP

When **Image Dimensions** is set to Region of Interest, the database image dimension parameters are *IP and decode settings*, and they determine the region or area of the captured image to be processed.

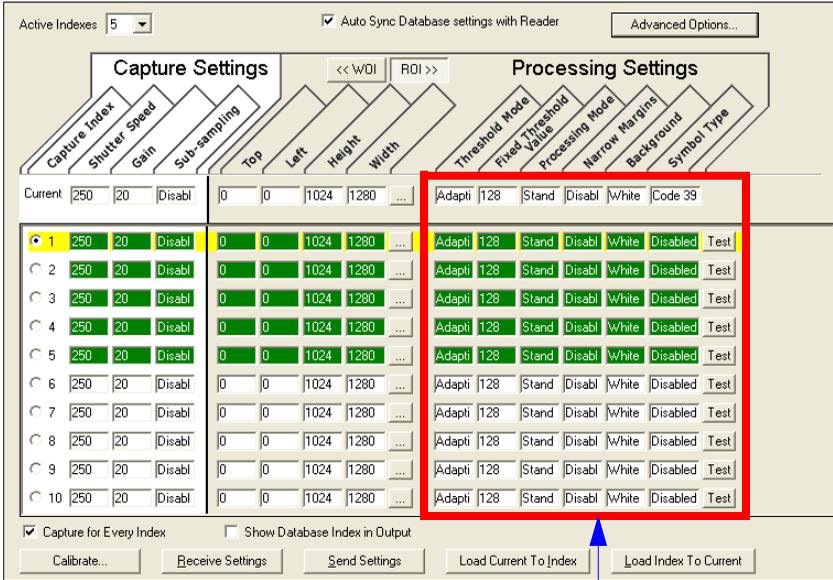

**Threshold Mode, Fixed Threshold Value, Processing Mode, Narrow Margins, Background, and Code Type** are all **Processing Settings** values.

# Save Current Settings to IP Database

**Definition:** Allows current, active configuration settings to be saved to a selected database index.

**Serial Cmd:** <K255+,index>

**Example:**

<K255+,5>

This command phrase saves the imager's current, active configuration settings to database index 5.

## Save Current Settings to IP Database by ESP

The screenshot shows the ESP software interface with the following elements:

- Active Indexes: 5 (dropdown menu)
- Auto Sync Database settings with Reader
- Advanced Options... (button)
- Configuration sections: Capture Settings (Capture Index, Shutter Speed, Gain, Sub-sampling, Top, Left, Height, Width) and Processing Settings (Threshold Mode, Fixed Threshold, Processing Mode, Narrow Margins, Background, Symbol Type).
- Current settings: 250, 20, Disabl, 0, 0, 1024, 1280, ...
- Table of 10 database indices (1-10) with their respective settings. Index 1 is selected.
- Buttons: Calibrate..., Receive Settings, Send Settings, Load Current To Index (highlighted with a blue arrow), Load Index To Current.
- Checkboxes:  Capture for Every Index,  Show Database Index in Output.

Click the **Load Current to Index** button to save the imager's current configuration parameters to the selected database index.

# Load Current Settings from IP Database

**Definition:** Allows the configuration settings contained in a selected database index to be loaded to current, active configuration settings.

**Serial Cmd:** <K255-,index>

**Example:**  
<K255-,5>

This command phrase loads the configuration settings contained in database index 5 to current, active configuration settings.

## Load Current Settings from IP Database by ESP

The screenshot shows the EZ Match software interface with the 'Active Indexes' dropdown set to '5'. The interface is divided into 'Capture Settings' and 'Processing Settings' sections. A table below these sections lists various parameters for different indices (1-10). The 'Load Index to Current' button at the bottom is highlighted with a blue arrow, and a callout box points to it with the text: 'Click the Load Index to Current button to load configuration settings from the selected index to current, active settings.'

Index	Current	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test
1	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
2	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
3	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
4	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
5	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
6	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
7	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
8	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
9	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	
10	250	20	Disabl	0	0	1024	1280	Adapti	128	Stand	Disabl	White	Disabl	Test	

## Notes on Symbol Type

- The **current** DataBar Expanded status does not change if it is configured as Enabled (Stacked) and the **database** DataBar Expanded status is Enabled.
- The **current** DataBar-14 status does not change if it is configured as Enabled (Stacked) and the **database** DataBar Expanded status is Enabled.
- Data Matrix ECC level is determined by the **current** settings and not by **database** settings. Therefore, the database does not know which ECC level to enable, and has no effect on current Data Matrix ECC settings.

## Request Selected Index Settings

*Definition:* Returns configuration settings for the selected database index.

*Serial Cmd:* <K255?,index>

***Example:***

<K255?,5>

This command phrase returns the configuration settings for database index 5.

## **Request All IP Database Settings**

*Definition:* Returns configuration settings for all indexes in the IP Database.

*Serial Cmd:* <K255?>

***Example:***

<K255?>

This command phrase returns the configuration settings for all 10 database indexes.



# 13 Terminal

## Contents

- Terminal Window..... 13-2
- Find ..... 13-3
- Send ..... 13-4
- Macros..... 13-5
- Terminal Window Menus..... 13-6


This section describes the **Terminal** window and macro functions in **ESP**.

# Terminal Window



Click the **Terminal** button to bring up the Terminal view.

The following view will appear:

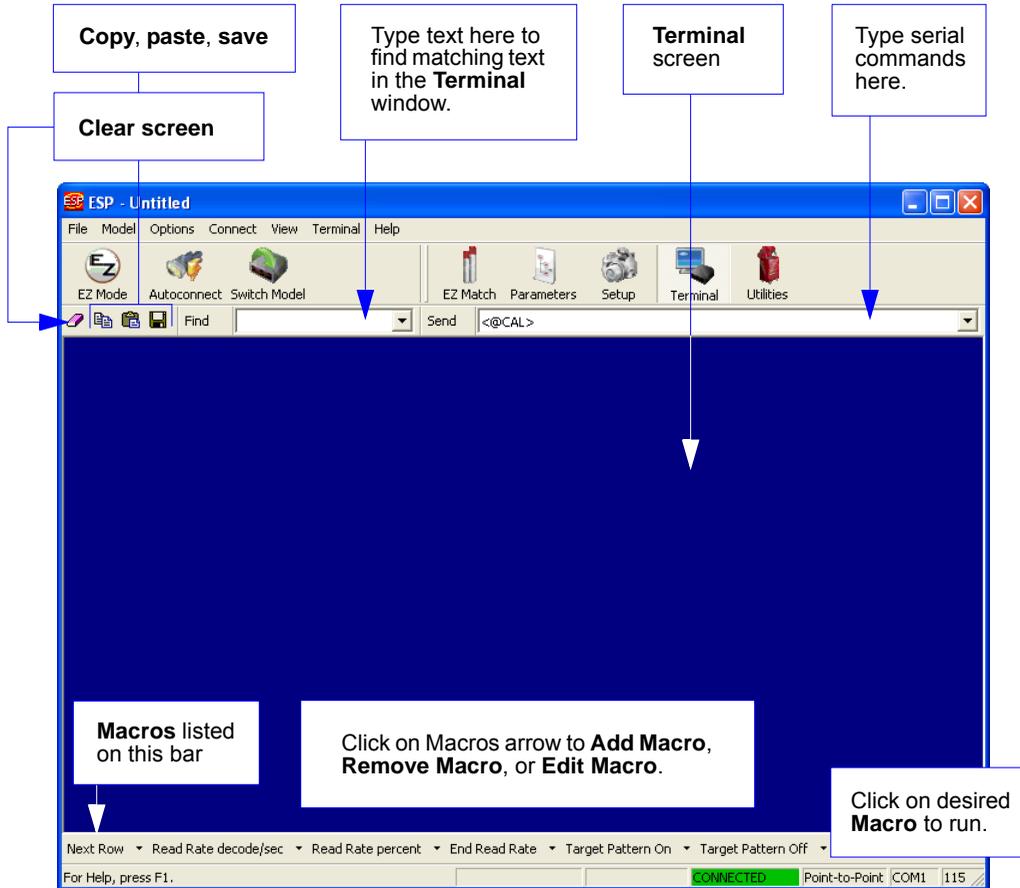

The **Terminal** screen allows you to send serial commands to the imager by using Macros, by copying and pasting, or by typing commands in the **Send** text field.

The **Terminal** screen also displays symbol data or information from the imager.

You can also right click on the **Terminal** screen to bring up a menu of further options.

# Find

The **Find** function allows you to enter text strings to be searched for in the **Terminal** window. For example, a series of symbols have been scanned into the **Terminal** view and you want to determine if a particular symbol whose data begins with “ABC” has been read.

1. Type “ABC” into the **Find** box.



2. Press **Enter**.

The first instance of “ABC” will be highlighted in the **Terminal** window.

3. Click the **Find** button to the right of the text field to locate additional instances of “ABC”.

## Send

The **Send** function allows you to enter serial commands and then send them to the imager.

1. Type the command into the **Send** box.



2. Press **Enter**.
3. Click the **Send** button to the left of the text field to send .

## Macros

Macros can be stored in a macro selection bar, edited in a separate window, and executed by clicking on the macro name.



Click on **Next Row** to see the next row of macros


Click on the first arrow here to see **Add Macro** or **Default Macros**. When you default macros, the entire macros set is restored to their original macro commands.

Click on subsequent arrows to edit macros.

When you click on the macro name, the macro is executed in the **Terminal** window. If this is a command, it is sent to the reader at the same time that it is displayed.

### *Editing a Macro*

When you click the arrow next to any macro and select **Edit**, the following appears:

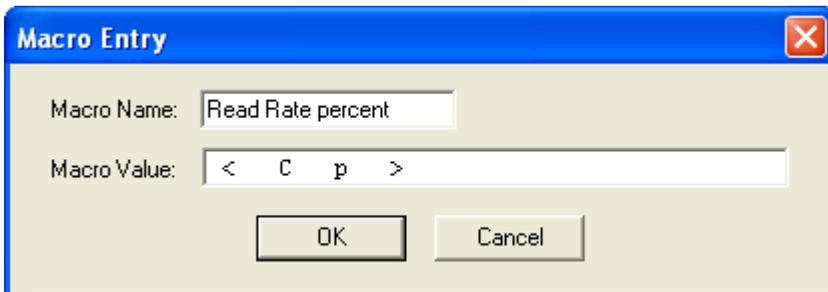

You can edit an existing macro or type in the **Macro Name** text field and define it in the **Macro Value** text field. Click **OK**.

# Terminal Window Menus


Right-click on the **Terminal** window to display the following menu:



- **Copy** selected text to clipboard.
- **Paste** from Terminal or other text.
- **Clear** all text in Terminal window.
- **Select All** text in the Terminal window.
- **Save...** brings up a **Save As** dialog.
- **Change Font...** of text in Terminal; brings up a **Font** dialog.
- **Change Echo Font...** to change typed text; brings up a **Font** dialog.
- **Enable Echo** enables Echo text (typed by user).
- **Change Background Color** of Terminal window.
- **Non-Printable Characters** allows you to hide non-printable characters, or to show them in **Standard** or **Enhanced** format.
- **Default Settings** returns all the above settings to default.
- **Keyboard Macros** allows you to create new keyboard macro commands that can be sent from function keys (F2, F4, F5, etc.).

## Terminal Dropdown Menu

The dropdown **Terminal** menu has **Capture Text**, **Save Current Text**, **Send File**, **Find Next**, and **Find Previous** functions, as well as the same functions defined above.

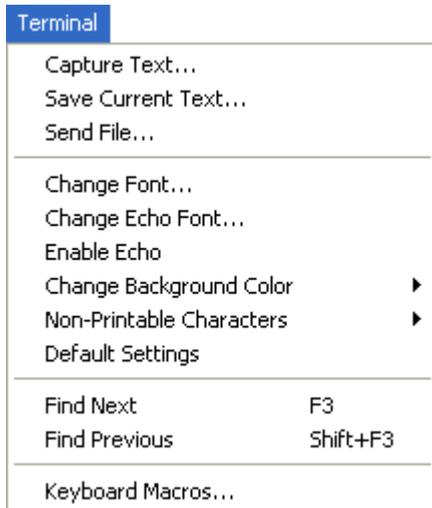

- **Capture Text...** lets you append data in real time to a text file of your choice. While in operation, the text file cannot be opened. You can select Pause to interrupt the capture flow or Stop to end the flow and open the file.
- **Save Current Text...** saves all text in the Terminal window to a text file.
- **Send File** allows you to browse for specific files and send them to the reader.
- **Find Next** searches for a user-defined section of text in the Terminal.
- **Find Previous** operates in the same way as Find Next, but searches backward through Terminal text.

# 14 Utilities

## Contents

Serial Utility Commands .....	14-2
Read Rate .....	14-4
Counters .....	14-5
Device Control .....	14-8
Differences from Default .....	14-9
Master Database .....	14-10
Firmware .....	14-16
Default / Reset / Save .....	14-19
Imager Status Requests .....	14-21
Other Operational Serial Commands .....	14-23

Utility commands are generally commands that are performed during imager operations to check or determine Read Rates, or to perform miscellaneous operations on imager hardware. Serial utility commands are not prefaced with a “K” and a numeric code, nor do they require an initialization command (<A> and <Z>). They can be entered from within any terminal program or from **ESP’s Terminal** or **Utilities** windows.

# Serial Utility Commands

**Note:** For a list of all K commands, see [Serial Configuration Commands](#) on page A-13.

Type	Command	Name
Read Rate	<C>	Enter Decode Rate Test
	<Cp>	Enter Percent Rate Test
	<J>	Exit Decode Rate and Percent Rate Test
Counters	<N>	No Read Counter
	<O>	No Read Counter Reset
	<T>	Trigger Counter
	<U>	Trigger Counter Reset
	<V>	Good Read/Match Counter
	<W>	Good Read/Match Counter Reset
	<X>	Mismatch Counter
	<Y>	Mismatch Counter Reset
	<CAP_A>	Cap Absence Counter
	<CAP_P>	Cap Presence Counter
	<CAP_U>	Cap Unknown Counter
	<CAP_R>	Cap Counter Reset
	<TUBE_A>	Tube Absence Counter
	<TUBE_P>	Tube Presence Counter
	<TUBE_R>	Tube Counter Reset
Device Control	<L1>	Programmable Output 1
	<L2>	Programmable Output 2
	<L3>	Programmable Output 3
	<11>	Targeting System On
	<10>	Targeting System Off
	<I>	Disable Imager
	<H>	Enable Imager
	<a1>	Include PDF Information in Preamble (PDF417)
Master Database	<G>	Store Next Symbol Read to Database Index 1
	<Gn>	Store Next Symbol Read to Database Index <i>n</i>
	<NEWM>	New Master Load Status
Part Number / Checksum	<#>	Display All Firmware Part Numbers
	<#a>	Display Application Code Part Number
	<#b>	Display Boot Code Part Number
	<#p>	Display Profile Module Part Numbers
	<!>	Display All Available Firmware Checksums
	<!a>	Display Application Code Code Checksum

<b>Part Number / Checksum</b>	<b>&lt;!b&gt;</b>	Display Boot Code Checksum
	<b>&lt;!p&gt;</b>	Display Profile Module Checksum
<b>Default/Reset/Save</b>	<b>&lt;A&gt;</b>	Reset (does not save for power-on)
	<b>&lt;Ard&gt;</b>	Reset and Recall Microscan Defaults
	<b>&lt;ArdWB&gt;</b>	Reset and Recall Microscan White Balance Defaults
	<b>&lt;Arp&gt;</b>	Reset and Recall Power-On Parameters
	<b>&lt;Arc&gt;</b>	Reset and Recall Customer Default Parameters
	<b>&lt;Arl&gt;</b>	Reset and Recall Microscan Tube/Cap Library Defaults
	<b>&lt;Z&gt;</b>	Save Current Settings for Power-On
	<b>&lt;Zc&gt;</b>	Save Current Settings as Customer Default Parameters for Power-On
	<b>&lt;Zrd&gt;</b>	Recall Microscan Default Parameters and Save for Power-On
	<b>&lt;ZrdWB&gt;</b>	Reset Microscan Default White Balance Parameters and Save for Power-On
	<b>&lt;Zrc&gt;</b>	Recall Customer Default Parameters and Save for Power-On
	<b>&lt;ZI&gt;</b>	Save Current Tube/Cap Library Parameters for Power-On
	<b>&lt;Zrl&gt;</b>	Recall Microscan Tube/Cap Library Defaults and Save for Power-On
<b>Imager Status Request Commands</b>	<b>&lt;?&gt;</b>	Imager Status Byte
	<b>&lt;K?&gt;</b>	All Status Request
	<b>&lt;K??&gt;</b>	All Descriptor Status Request
	<b>&lt;K?#&gt;</b>	All Range Status Request
	<b>&lt;Knnn?&gt;</b>	Single Status Request
	<b>&lt;Knnn??&gt;</b>	Single Descriptor Status Request
	<b>&lt;Knnn?#&gt;</b>	Single Range Status Request
<b>Other Operational Commands</b>	<b>&lt;uy,path image&gt;</b>	Y-Modem Upload
	<b>&lt;dy,image name&gt;</b>	Y-Modem Download
	<b>&lt;BCCFG&gt;</b>	Enter Bar Code Configuration Mode
	<b>&lt;@CAL&gt;</b>	Calibrate
	<b>&lt;@LCAP&gt;</b>	Learn Tube or Cap
	<b>&lt;@WB&gt;</b>	White Balance Calibration

# Read Rate

## Read Rate by ESP

You can access **Read Rate** from the **Utilities** view under the **Read Rate** tab.

To see the number of decodes per second, click the **Decodes/sec** radio button and click the **Start** button.

To see the percentage of decodes, click the **Percent** radio button and then the **Start** button.

To end a Read Rate test, click the **Stop** button (the **Start** button becomes a “**Stop**” button during an active Read Rate test.)

**Important:** When Read Rate is enabled, the **IP Database** is not active, regardless of how the imager is configured.



## Read Rate by Serial Command

### Enter Decodes / Second Test

Sending **<C>** instructs the imager to transmit the decodes per second and symbol data (if any). The decode rate can vary dramatically due to the angle and location of the symbol in relation to the field of view. This test is very useful in aligning and positioning the imager during setup.

### Enter Percent Test

Sending **<Cp>** instructs the imager to transmit the percentage of decodes and any decoded symbol data.

### End Read Rate Test

Sending **<J>** ends both the Percent test and the Decodes/Second test.

## Tube/Cap Detection Notes

1. If Tube/Cap Detection operations are enabled in the **<K260> Multi-Operation** command, they will be part of Read Rate output. The formatted message will follow the Tube/Cap Detection message setup.
2. Active symbologies for Read Rate are determined in the same way, regardless of how Multi-Operation is configured.
3. Tube Angle is not part of Read Rate output. See the the **<K850> Configurable Output 1** command for further details.
4. If enabled, Library Index is part of Read Rate output. Tubes or caps with different library indexes are treated as different objects. See the the **<K850> Configurable Output 1** command for further details.

## Counters

**Counter** commands can be a numeric value from **00000** to **65535**. After reaching the maximum numeric limit of 65535, an error message will be displayed and the counter will automatically roll over and start counting again at 00000. To obtain the cumulative total of counts after the rollover has occurred, add 65536 per each rollover (the imager does not keep track of the number of rollovers) to the current count.

**Note:** All counter values will be lost if power is recycled to the imager, or if the imager receives a **Reset** or **Save** command.

### Counters by ESP

You can access **Counters** from **ESP's Utilities** menu.

Click the **Request** button to display the appropriate count or **Clear** to set the counter to zero.

Read Rate	Counters	Device Control	Differences	Master Database	Firmware
		Request All		Clear All	
Request	Clear	Trigger:	<input type="text"/>		
Request	Clear	Good Read:	<input type="text"/>		
Request	Clear	Noread:	<input type="text"/>		
Request	Clear	Mismatch:	<input type="text"/>		
Request	Clear Cap Counters	Cap Absent:	<input type="text"/>		
Request		Cap Present:	<input type="text"/>		
Request		Cap Unknown:	<input type="text"/>		
Request	Clear Tube Counters	Tube Absent:	<input type="text"/>		
Request		Tube Present:	<input type="text"/>		

## Counters by Serial Command

### No Read Counter

Sending **<N>** displays the total number of No Reads that have occurred since the last reset.

### No Read Counter Reset

Sending **<O>** sets the No Read Counter to 00000.

### Trigger Counter

Sending **<T>** displays the total number of triggers since the last reset.

### Trigger Counter Reset

Sending **<U>** sets the trigger counter to 00000.

### Good Read / Match Counter (or Good Read Counter)

Sending **<V>** displays the total number of Good Reads matching the master symbol, or, if **Master Symbol** is not enabled, the number of Good Reads since the last reset. This counter is always enabled, but will only work as a match count when **Master Symbol** is enabled. If **Master Symbol** is not enabled, this counter records the number of Good Reads. This count can be requested at any time.

### Good Read / Match Counter Reset

Sending **<W>** sets the Match Counter to 00000.

### Mismatch Counter

Sending **<X>** displays the number of decoded symbols since the last reset that do not match the master symbol.

### Mismatch Counter Reset

Sending **<Y>** sets the Mismatch Counter to zero.

### Cap Absent Counter

Sending **<CAP\_A>** displays the total number of Cap Absences that have occurred since power-on, or since the last Cap Counter Reset occurred.

Imager response format: **<CAP\_A/xxxxx>**

### Cap Present Counter

Sending **<CAP\_P>** displays the total number of Cap Presences that have occurred since power-on, or since the last Cap Counter Reset occurred.

Imager response format: **<CAP\_P/xxxxx>**

## Cap Unknown Counter

Sending **<CAP\_U>** displays the total number of Cap Unknowns that have occurred since power-on, or since the last Cap Counter Reset occurred.

Imager response format: **<CAP\_U/xxxxx>**

## Cap Counter Reset

Sending **<CAP\_R>** sets all Cap Counters to 00000.

## Tube Absent Counter

Sending **<TUBE\_A>** displays the total number of Tube Absences that have occurred since power-on, or since the last Tube Counter Reset occurred.

Imager response format: **<TUBE\_A/xxxxx>**

## Tube Present Counter

Sending **<TUBE\_P>** displays the total number of Tube Presences that have occurred since power-on, or since the last Tube Counter Reset occurred.


Imager response format: **<TUBE\_P/xxxxx>**

## Tube Counter Reset

Sending **<TUBE\_R>** sets all Tube Counters to 00000.

# Device Control

## Device Control by ESP

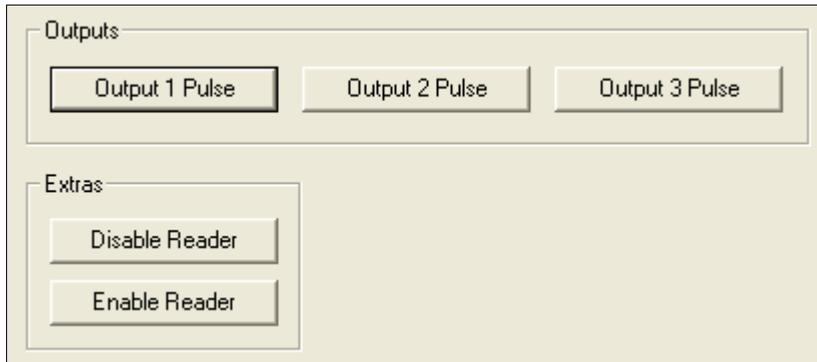

## Device Control by Serial Command

### Output 1 Pulse

Sending **<L1>** activates the link between Output 1 (+) and Output 1 (-) of the host connector (regardless of Master Symbol or Output 1 status).

### Output 2 Pulse

Sending **<L2>** activates the link between Output 2 (+) and Output 2 (-) of the host connector (regardless of Master Symbol or Output 2 status).

### Output 3 Pulse

Sending **<L3>** activates the link between Output 3 (+) and Output 3 (-) of the host connector (regardless of Master Symbol or Output 3 status).

### Disable Reader

Sending **<I>** will turn the imager OFF, end the current read cycle, and will not allow the imager to enter another read cycle until turned ON. This feature is useful during extended periods of time when no symbols are being decoded, or the imager is being configured. Disabling the imager will not affect any commands that have already been downloaded.

### Enable Reader

Sending **<H>** will turn the imager ON and allow it to enter read cycles.

### Enable PDF Information

Sending **<a1>** will cause PDF417 data to be prefaced with information consisting of ECC level (ECC level *n*), number of rows (*n* rows), number of columns (*n* columns), number of informative code words (*n* info code words), and the number of data characters (*n* data bits). Send **<a1>** again to disable PDF Information.

## Differences from Default

Clicking the **Differences from Default** button will cause **ESP** to check all stored configuration settings and compare them to default settings. All settings that are different than default will appear in the left column (shown below), and descriptions of those settings will appear in the right column.

Click this button for a list of **ESP** configuration settings that are different than default settings.

Click **Generate Barcode** to bring up the **Bar Code Dialog**. Then create configuration symbols containing the configuration commands of your choice.

<K200,4>	Mode (Serial Data)
<K201h,52>	Character (Delimited) ( R )
<K220,,1000>	Read Cycle Timeout (1000)
<K470,0>	Code 39 (Disabled)
<K525,435>	Focus Distance (435)
<K529,,,1.0,,,,2>	Focus Position (Calibrate)
	Symbol Type (Don't Calibrate)
	Processing (High)
<K541,,30>	Gain (30)
<K714h,,5a5a5a5a>	Message (ZZZZ)
<K715h,,5a5a5a5a>	Bad Symbol Message (ZZZZ)
<K716h,,5a5a5a5a>	No Symbol Message (ZZZZ)

Click **Save As** to save the report as plain text or a tab-delimited text file.

Send configuration settings to the imager and save in ESP by clicking **Send and Save**.

Send configuration settings to the imager without saving by clicking **Send to Reader**.

- To create a symbol containing any of the command settings in the table, click **Generate Barcode**. This will bring up the **Bar Code Dialog**.
- To save the **Differences from Default** report, either as plain text or as a tab-delimited text file, click **Save As**.
- Click **Send and Save** to send the settings to the imager and save them, or **Send to Reader** to send the settings without saving them.

**Important:** The use the **Differences from Default** feature, you must connect to the imager and **Receive Reader Settings** via the **Send/Recv** button on the toolbar.



# Master Database

**Important:** The **Master Database** is used for all **Matchcode** modes except **Sequential** and **Wild Card**, both of which use **Master Database Index # 1**.

## Master Database Overview

**Usage:** Used where more than one master symbol is required, as in a **Multisymbol** setup, for matching and other **Matchcode** operations.

**Definition:** Allows the user to define up to 10 master symbols as the master symbol database, which can be entered by keyboard, scanned in, displayed, or deleted by serial or **ESP** commands.

1. Click the **Master Database** tab.
2. Enable **Matchcode Type**.
3. Set the **Master Symbol Database Size**.
4. Select the database index in which you want to enter the master symbol.
5. Do one of the following to enter master symbol data:
  - a. Double-click the index row to type data directly into the index.
  - b. Click the **Read Symbol into Selected Index** to enter the next decoded symbol.

The screenshot shows the Master Database configuration window. At the top, there are several controls: a text field for 'Master Symbol Database Size' (set to 3), a checked 'Matchcode Type' checkbox, and a 'Read Symbol into Selected Index' button. Below these are two buttons: 'Receive Reader's Database' and 'Send Database to Reader'. The main area is a table with two columns: 'Index' and 'Master Symbol Data'. The table has three rows, with the first row selected. A 'Caution' message is at the bottom of the window.

Callouts in the image:

- Set Master Symbol Database Size here. (points to the size field)
- Loads the next symbol decoded into the selected index. (points to the Read Symbol into Selected Index button)
- Double-click a row to enter data into popup dialog box. (points to the first row of the table)
- Loads the imager's saved master symbols into ESP. (points to the Receive Reader's Database button)
- Saves the displayed database to the imager. (points to the Send Database to Reader button)

Caution: Since the total number of characters available for the master symbol database is limited, changes to the Master Symbol Database Size will re-allocate the number of characters available for each master symbol and could cause existing master symbols to be deleted. See manual for details.

## Master Symbol Database Size

**Definition:** **Number of Master Symbols** allows you to select 1 to 10 master symbols for the master symbol database.

**Serial Cmd:** **<K231, master symbol database size>**

**Note:** You must follow this command with a save command **<A>** or **<Z>**.

**Default:** **1**

**Options:** 1 to 10

Master Symbol Database Size

Matchcode Type

Read Symbol into Selected Index

5

Receive Reader's Database

Send Database to Reader

Set Master Symbol Database Size here.

**Caution:** Since the total number of characters available for the master symbol database is **3000**, changes to the **Master Symbol Database Size** will re-allocate the number of characters available for each master symbol and could cause existing master symbols to be deleted (except master symbol #1, unless it also exceeds the size limitation).

The table below specifies the maximum number of characters available to each symbol according the number of master symbols defined, from 1 to 10.

<b>Master Symbol Number</b>	<b>Maximum Characters</b>	<b>Master Symbol Number</b>	<b>Maximum Characters</b>
# 1	3000	# 6	500
# 2	1500	# 7	428
# 3	1000	# 8	375
# 4	750	# 9	333
# 5	600	# 10	300

## Enter Master Symbol Data

**Usage:** Allows you to enter master symbol data for any enabled master symbol index number (1 to 10), provided the total number of characters does not exceed the maximum allowed.

**Serial Cmd:** <K231, master symbol number, master symbol data>


**Options:** Enter data for 1 to 10 symbols (any combination of ASCII text up to the maximum allowed).

For example, to enter data for master symbol 9, after making certain that master symbol database size is enabled for 9 or more symbols, send <K231,9,data>.

**Important:** The ASCII characters <, >, and , can only be entered as hex pairs. See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

**Caution:** If no data is entered, the existing data will be deleted.

- ESP:**
1. Open the **Utilities** menu.
  2. Set the number of master symbols you want to create in **Master Symbol Database Size**.
  3. Double-click on each symbol number you want to set up and copy, or type your data in the popup dialog and click **OK**.

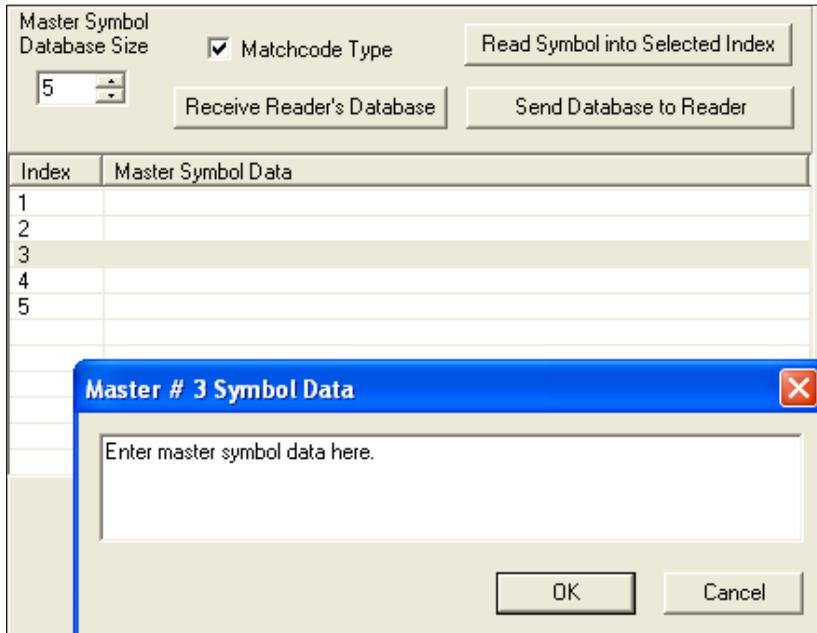

4. When all your data has been entered, click the **Send Database to the Reader** button.

## Request Master Symbol Data

**Definition:** Returns master symbol data for any enabled master symbols from 1 to 10. For example, to request master symbol # 5, enter **<K231?,5>**. The imager transmits master symbol # 5 data in brackets in the following format: **<5/>**. If no master symbol data is available, the output will be: **<5/>**.

**Serial Cmd:** **<K231?,master symbol number>**

**Caution:** Be sure to add the **?** or you will delete the master symbol.

**Note:** This command returns the number of master symbols if no number is included.

- ESP:**
1. Click the **Utilities** button and the **Master Database** tab.
  2. Click the **Receive Reader's Database** button.

The screenshot shows a dialog box titled "Master Symbol Database Size". It features a text input field containing the number "5". To the right of the input field is a checked checkbox labeled "Matchcode Type". Further right are three buttons: "Read Symbol into Selected Index", "Receive Reader's Database", and "Send Database to Reader".

## Request All Master Symbol Data

**Definition:** This command will return master symbol data for all symbols enabled (up to 10).

**Serial Cmd:** **<K231?>**

---

## Read Next Symbol as Master Symbol

**Definition:** After you've set the size in the database, you can order the imager to read the next symbol as the master symbol for any given master symbol number.

**Serial Cmd:** **<Gmaster symbol number>**

To store the next symbol decoded as master symbol # 1, send:

**<G>** or **<G1>**.

To store the next symbol decoded as the master symbol for any other master symbol database number, send:

**<Gmaster symbol number [1-10]>**.

For example, **<G5>** will cause the next symbol read to be entered as master symbol # 5.

**ESP:** In the **Master Database** tab under the **Output Format** menu,

1. Select the master symbol index number in which you want to store the symbol data.
2. Click the **Read Symbol into Selected Index** button.

**Caution:** If you've selected an index which already has existing data, that data will be copied over by new decoded data when you use this command.

## Request New Master Status

**Usage:** Informs the user when a new master symbol is pending and which position it is in.

**Definition:** Returns the position in the master symbol database that will be loaded on the next read.

**Serial Cmd:** **<NEWM>**

The imager returns: **<NEWM/next master to load>**

Once a symbol has been read and loaded, the status will be cleared and the response will be **<NEWM/0>**.

(See also **New Master Pin** in Chapter 10, **Matchcode**.)

## Delete Master Symbol Data

**Definition:** You can directly delete the master symbol data by serial command or by **ESP**.

- ESP:**
1. Click the **Utilities** button to access the master symbol.
  2. Click the **Master Database** tab and double-click the symbol number you want to delete.
  3. Delete text and click **OK**.

**Serial Cmd:** **<K231, master symbol number,>**

To delete a master symbol, enter the database number and a comma, but leave the data field empty. For example, to delete master symbol # 5, send the following: **<K231,5,>**. The command is entered with a blank master symbol data field, which tells the imager to delete the selected master symbol from the database.

# Firmware

## Firmware by ESP

The screenshot shows a software interface with two main sections: 'Firmware Update' and 'Firmware Verification'. The 'Firmware Update' section contains a dropdown menu labeled 'App Code' and a 'Start...' button. The 'Firmware Verification' section contains two rows of controls. The first row has a dropdown menu labeled 'App Code', a 'Request Part No.' button, and an empty text input field. The second row has a dropdown menu labeled 'App Code', a 'Request Checksum' button, and another empty text input field.

### Firmware Update

Application code versions are specific to your imager. Consult with your sales representative before downloading application code. If needed, an application code will be sent to you in the form of a \*.mot file.

#### To download application code:

1. First, be sure that your imager is connected to the host.
2. Apply power to the imager.
3. Before updating, you should verify the current firmware.
4. Click in the **Firmware Update** text box and select the file type you want to download. This will open a file locator box.
5. Navigate to the appropriate file (it will be a \*.mot file), open the file, and click **Start**.

**Caution:** Do not interrupt power or disconnect the host cable while download is in progress. Be sure that each download is complete before moving on to the next.


**Important:** When updating firmware, be sure that the application code and boot code versions are mutually compatible.

## Firmware Verification

### ***Request Part Number by ESP***

You can send a request to the imager for part numbers, checksums, boot code, and application code.

1. Click the **Firmware** tab.
2. From the dropdown selection box to the left of the **Request Part No.** button, make your selection.
3. Select the code type to see its part number displayed in the text field to the right of the **Request Part No.** button.

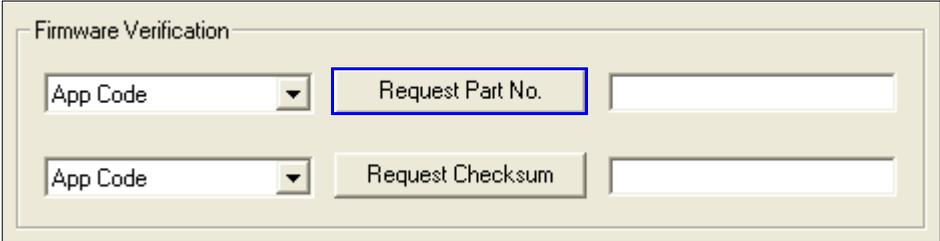

The screenshot shows a dialog box titled "Firmware Verification". It contains two rows of controls. The top row has a dropdown menu labeled "App Code", a button labeled "Request Part No." (highlighted with a blue border), and a text input field. The bottom row has a dropdown menu labeled "App Code", a button labeled "Request Checksum", and a text input field.

### ***Request Part Number by Serial Command***

- When you send **<#>** (a request for all product part numbers), the imager returns:  
**<#b/BOOT\_P/N><#a/APP\_P/N><#p/PROFILE\_P/N>**.
- When you send **<#a>** (a request for the application code part number), the imager returns:  
**<#a/APP\_P/N>**.
- When you send **<#b>** (a request for the boot code part number), the imager returns:  
**<#b/BOOT\_P/N>**.
- When you send **<#p>** (a request for profile module part numbers), the imager returns:  
**<#p/PROFILE\_P/N>**.

### **Request Checksum by ESP**

You can send a request to the imager for part numbers, checksums, boot code, and application code.

1. Click the **Firmware** tab.
2. From the dropdown selection box to the left of the **Request Checksum** button, make your selection.
3. Select the code type to see its checksum displayed in the text field to the right of the **Request Checksum** button.

The screenshot shows a window titled "Firmware Verification" with two rows of controls. Each row starts with a dropdown menu labeled "App Code". The top row has a button labeled "Request Part No." followed by an empty text input field. The bottom row has a button labeled "Request Checksum" (which is highlighted with a blue border) followed by an empty text input field.

### **Request Checksum by Serial Command**

- When you send **<!>** (a request for all available firmware checksums), the imager returns:  
**<!b/BOOT\_CHECKSUM><!a/APP\_CHECKSUM><!p/PROFILE\_CHECKSUM>**
- When you send **<!a>** (a request for the application code checksum), the imager returns:  
**<!a/APP\_CHECKSUM>**
- When you send **<!b>** (a request for the boot code checksum), the imager returns:  
**<!b/BOOT\_CHECKSUM>**
- When you send **<!p>** (a request for profile module checksum), the imager returns:  
**<!p/PROFILE\_CHECKSUM>**

## Default / Reset / Save

Understanding and controlling your imager's active, saved, and default settings is critical to its successful operation.

	<i>Function</i>	<i>Serial Cmd</i>	<i>ESP (first, right click in any menu tree)<sup>a</sup></i>	<i>EZ Button</i>
<b>Resets (not saved for power-on)</b>	Reset	<A>	Save to Reader, Send No Save	No
	Reset and recall Microscan defaults	<Ard>	No	No
	Reset and Recall Microscan White Balance Defaults	<ArdWB>	No	No
	Reset and recall power-on parameters	<Arp>	No	No
	Reset and recall customer default parameters	<Arc>	No	No
	Reset and recall Microscan Tube/Cap Library defaults	<Arl>	No	No
<b>Saved for Power-On</b>	Save current settings for power-on	<Z>	Save to Reader, Send and Save	No
	Save current settings as customer default parameters for power-on	<Zc>	Save to Reader, Send and Save Customer Defaults for Power-On <sup>b</sup>	No
	Recall Microscan default parameters and save for power-on	<Zrd>	No	No
	Reset Microscan Default White Balance Parameters and Save for Power-On	<ZrdWB>	No	No
	Recall customer default parameters and save for power-on	<Zrc>	No	Press and hold while powering on imager
	Save current Tube/Cap Library parameters for power-on	<Zl>	Send and Save	No
	Recall Microscan Tube/Cap Library defaults and Save for Power-On	<Zrl>	Send and Save	No

a. When you right click in a menu tree and select **Default Current Menu Settings** or **Default All ESP Settings**, it is important to note that only **ESP** settings are defaulted. To save these defaults to the imager itself, you need to follow up with a **Save to Reader, Send and Save** command.

b. Only available in **ESP** if enabled under the **Options** dropdown menu.

### Resets

Resets ("**A**" commands) affect only the current settings (active memory) and are not saved for power-on.

### Saved for Power-on

Power-on parameters ("**Z**" commands) are saved to NOVRAM and recalled and loaded into current parameters when power is cycled to the imager or the **<Arp>** command is issued.

### Defaults

Defaults are Microscan firmware settings or saved customer settings that can be recalled, either by software or hardware reset.

## Customer Default Parameters

Customer default parameters (saved by **<Zc>**) are the same set of parameters as power-on parameters but are saved in a different, isolated section of NOVRAM. This allows a user essentially to create a backup set of parameters that can be recalled in the event that the current parameters or power-on parameters have been accidentally changed or are no longer desired.

It is important to note that a hardware default does not affect customer default parameters. For example, a user that has inadvertently changed communication settings and saved them with a **<Z>** command, may not know the correct settings or have the capability to communicate within those settings. By first doing an EZ Button default or hardware default to restore the known Microscan defaults, the user can then recall the previous customer-saved settings with an **<Arc>** or **<Zrc>** command.

## Microscan Default Parameters

Microscan default parameters are contained in the firmware and cannot be changed.

### Software Defaults

Microscan default parameters can be recalled (loaded into current settings) with **<Ard>** command or recalled and saved for power-on with the **<Zrd>** command.

### Hardware Default

If a software default and reset is not possible, it may be necessary to reset the imager by shorting (connecting) specific pins. This procedure has the same effect as the **<Zrd>** software command.

**Important:** For this reset to occur, this command must be executed within 60 seconds of a power-on or a reset.

1. Apply power to the imager.
2. If using an IB-131, locate pins 7 and 11 on the host connector.  
**Caution:** Be certain that the correct pins are located. Connecting the wrong pins could cause serious damage to the unit.
3. Momentarily connect these wires (or pins) and listen for a series of short beeps.
4. Within 3 seconds, connect them again. A longer beep should be heard. If not, repeat the process.

### Default on Power-On

You can also use the EZ Button to default the imager by holding it down while applying power to the imager, provided that this feature is enabled.

# Imager Status Requests

## <?> Status Byte

The imager responds to a status request <?> with a two character hex value, such as <?/22>. To determine status:

1. Look up the binary conversion in the table below.

For example, the first hex **2** would be **0 0 1 0** in binary, as read from binary digits **3** through **0**; the second hex **2** is also **0 0 1 0** as read from binary digits **7** through **4**.

2. Next, enter your binary values from the table below in the “Binary” column next to the appropriate bit.

Bit	Binary	Imager Status
0	0	Command error detected
1	1	Command received
2	0	Communication error detected
3	0	Flash sector unprotect failure
4	0	Host/Aux port buffer overflow
5	1	Imager is in a read cycle

3. Under “Binary,” interpret **1s** as true and **0s** as not true. For example, bit 1 has a **1** in the “Binary” column, indicating “Command Received”. Bit 5 is also a **1**, indicating that the “Imager is in a read cycle”.

Hex Value	Binary Bit Digits			
	7	6	5	4
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1
A	1	0	1	0
B	1	0	1	1
C	1	1	0	0
D	1	1	0	1
E	1	1	1	0
F	1	1	1	1

## <K?> All Status Request

This is the fastest way to learn the imager’s current configuration. Sending this request will return the current settings of all commands, starting with the lowest K command value and ending with the highest K command value.

## <Knnn?> Single Status Request

This request will return the value of the variables associated with the requested K command. The request of a single entry of a database command cannot exceed the number of database slots for the specific command.

## <K??> All Descriptor Request

This request will return all current descriptors for every K command, starting with the lowest K command value and ending with the highest K command value.

## <Knnn??> Single Descriptor Request

This request returns the basic functional description of all fields in the requested K command.

### **<K?n> All Range Request**

This request will return the current settings of all commands within the user-defined range, starting with the lowest user-defined K command value and ending with the highest user-defined K command value.

### **<Knnn?#> Single Range Request**

This request will return the value range and storage type description of all fields in the requested K command.

## Other Operational Serial Commands

The following serial utility commands can be entered from **ESP's Terminal** or a PLC.

### Y-Modem Upload

**<uy,path image>**

<i>Image Type</i>	<i>Image Attributes</i>
_gs	Gray Scale (default)
_c24	24-bit color image (EZ Match Color only)
_q1...100	JPEG Quality (1 = Lowest; 100 = Highest)

### Y-Modem Download

**<dy,image name>**

Accepts any file size at or under the standard full-scale image, but transfer must be initiated as a "Filename.bmp" request. The system must reserve full-scale storage regardless of actual image size. All history will be lost at the time image download is initiated. Only one gray scale image can be downloaded.

Gray scale .bmp images from 8 x 3 to 2048 x 832 can be downloaded, and it is not necessary to adjust the aspect ratio. A 2048 x 64 image can be sent.

**Important:** The column values of all images must be divisible by **4**, and must be in gray scale (not color).

<b>Image Name (.bmp only)</b>
1280x1024.bmp
1280x1024_gs.bmp
Any_name.bmp
<b>Valid Image Attributes</b>
2048 x 832 (largest image)
8 x 3 (smallest image)
<b>Example</b>
<dy,Image.bmp>
<dy,2048x832_gs.bmp>

### Image Library Request

**<op,9>** Manages files in a selected directory.

<i>File Source</i>	<i>Explanation</i>
<b>(Nothing)</b>	All files in "root" directory
<b>/</b>	All files in "root" directory
<b>/saved</b>	All files in "saved" directory
<b>*.*</b>	All files in all directories
<b>/del</b>	Deletes all files in the root director
<b>/saved/del</b>	Deletes all files in the saved directory
<b>del*.*</b>	Deletes files in all directories

## Bar Code Configuration Mode

**Definition:** **Bar Code Configuration Mode** is a way of programming the imager by using ECC 200 Data Matrix symbols.

**Serial Cmd:** **<BCCFG>**

**Bar Code Configuration Mode** can be entered three different ways:

1. By forcing the imager into **Bar Code Configuration Mode** by serial command **<BCCFG>**.
2. By configuring one of the 4 EZ Button positions to **Bar Code Configuration Mode**.
3. By reading a Data Matrix symbol with a special code word used by ISO/IEC 16022 to signify imager programming. This can be either in a regular read cycle or during a Read Rate test. Reading this symbol in the calibration routine will have no effect.

Once **Bar Code Configuration Mode** has been entered, the Data Matrix symbols can be thought of as serial data. You can configure the imager by printing labels in Microscan's serial command format. Commands are processed as if the data were streamed in through the serial port. The imager will acknowledge the symbol with a beep, green flash, and echo the serial data to the host. If the command causes the imager to produce more serial output, such as serial verification or counter requests, the data will be routed to the host port.

**Bar Code Configuration Mode** can be exited by any reset **<A>** or **<Z>** command as well as a **<J>** or a quick press and release of the EZ Button.

The command to exit **Bar Code Configuration Mode** can be included as part of the Data Matrix symbol. For example, try encoding **<K200,4><K220,1><J>** into a Data Matrix symbol. This configures the imager to enable **Serial Trigger Mode**, to program a new trigger to end the read cycle, and to exit **Bar Code Configuration Mode** with **<J>**.

To end all EZ Button functions, press the EZ Button once and quickly release.

## Tube/Cap Learn

The **<@LCAP>** command activates the Tube/Cap Learn function. When new profiles are found, Tube/Cap Learn stores them in the **Tube/Cap Library**.

When **<@LCAP>** is sent from **Terminal** in **ESP**, one of the following outputs will result:

```
Learning Tube and Cap...  
Added to library #xx
```

```
Learning Tube and Cap...  
Already in library #xx
```

```
Learning Tube and Cap...  
Unable to locate a cap
```

```
Learning Tube and Cap...  
Unable to locate a tube
```

```
Learning Tube and Cap...  
Unable to add (Library full)!
```

```
Learning Tube and Cap...  
Please enable a cap detecting operation!
```

**Important:** Upon initiation of a Tube/Cap Learn operation, the process searches active operations (Multi-Operations 1 – 3, **<K260>**) and locates the first operation that has Tube/Cap Detection enabled. This operation is used to “learn” the tube or cap. If no operation has Tube/Cap Detection enabled, the following message will be output:

```
“Please enable a cap detecting operation!”
```

## **White Balance Calibration**

<**@WB**>

The EZ Match Imager's factory default values are appropriate for nearly all applications. However, the **White Balance** calibration command will override the pre-configured values if necessary.

White Balance is a processing operation performed to ensure proper color fidelity in a captured digital image. The image sensor does not detect light in exactly the same way as the human eye, which means that some processing or correction of the detected image is necessary to ensure that the final image realistically represents the colors of the original image.

White Balance calibration works best if a white object (a piece of paper, for example) is placed in front of the imager. White and black objects can be present in the field of view during White Balance calibration, but no color objects can be present.

**Important:** The White Balance correction adjusts the **R**, **G**, and **B** gain offset values for every possible analog gain (0 to 42) in the system. Any gain values greater than 42 (43 to 48) will use the factory default White Balance settings.



# 15 Output Format

## Contents

- Output Format Serial Commands..... 15-2
- Output Format Status ..... 15-3
- Format Assign ..... 15-4
- Format Extract..... 15-5
- Format Insert ..... 15-7
- Output Filter Configuration ..... 15-9
- Ordered Output Filter ..... 15-13

This section explains how to control the formatting and filtering of decoded symbol data for output.

## Output Format Serial Commands

Format Extract	< <b>K740</b> , <i>output index,start location,length</i> >
Format Insert	< <b>K741</b> , <i>output index,length,hex string</i> >
Format Assign	< <b>K742</b> , <i>symbol number,status</i> >
Format Status	< <b>K743</b> , <i>output format status</i> >
Output Filter Configuration	< <b>K744</b> , <i>filter number, symbology type,length,wildcard,placeholder,data,unused,database index</i> >
Ordered Output Filter	< <b>K745</b> , <i>number of filters</i> >

# Output Format Status

**Definition:** This is a global enable/disable parameter. In order to use formatting you must set up the format using the insert and extract commands, and you must also assign a symbol to format using the **Format Assign** command.

**Serial Cmd:** <K743,output format status>

**Default:** Disabled

**Options:** 0 = Disabled  
1 = Enabled

## Output Format Status Disabled

When **Output Format Status** is set to **Disabled**, output formatting is globally disabled.

## Output Format Status Enabled

When **Output Format Status** is set to **Enabled**, output formatting is enabled. However, **Format Assign**, **Format Insert**, and **Format Extract** must be properly set up as well.

## Output Format Status by ESP

On the **Output Format** tab, check the **Enable Output Format** box.

Enable Output Format
  Auto Sync with Reader

Set Number of Symbols: 1

Output Phrase

Preamble:	Symbol #1	Postamble:
<input type="text" value="CR"/>		<input type="text" value="CR LF"/>
<input checked="" type="checkbox"/> Enable	<input checked="" type="checkbox"/> Parse	<input checked="" type="checkbox"/> Enable

Show Parse Table

# Format Assign

## Symbol Number

**Definition:** **Symbol Number** refers to the number of the symbol to which output formatting will apply. For example, if you wish to enable user-defined formatting to symbol # 2 in a multisymbol read cycle, you would send the command **<K742,2,1>**. Note that the number of symbols may exceed the format capabilities

**Serial Cmd:** **<K742, symbol number, status>**

**Options:** 1 to 10

- 1 = Formatted output status for symbol # 1.
- 2 = Formatted output status for symbol # 2.
- ...
- 10 = Formatted output status for symbol # 10.

## Status


**Definition:** **Status** refers to the user-defined formatting of a selected symbol position in the read cycle result. Note that there is also a global formatting “enable” command that must be set for the formatting to be applied.

**Serial Cmd:** **<K742, symbol number, status>**

**Default:** **Disabled**

**Options:** **0 = Disabled**  
1 = Enabled (Assign parameters to specified symbol.)

## Format Assign by ESP

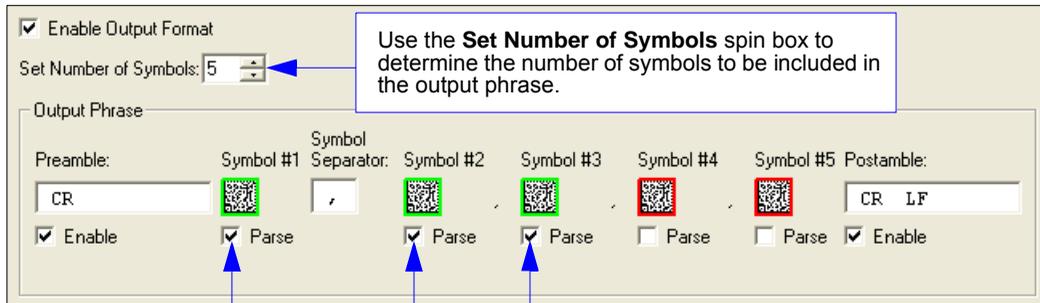

---

# Format Extract

## Output Index

**Definition:** **Output Index** refers to the database entry you wish to modify with this command. A formatted output is built by *extracting data from a symbol's original data output* and/or inserting user-defined characters.

It may be helpful to think of individual indexes as positions in the final formatted output you wish to build. Starting with index # 1, enter either an extract or insert command to begin building your desired output string. Then, with the next index number, enter either an extract or insert command to continue building the output string. Continue this process until you are finished building the string.

**Serial Cmd:** <**K740,output index,start location,length**>

**Options:** 1 to 100

## Start Location

**Definition:** Defines the location within the symbol data where the character extraction will begin. The first character extracted will also be the first character in the sequence displayed in user-defined output.

**Serial Cmd:** <**K740,output index,start location,length**>

**Default:** **0**

**Options:** 1 to *n* (maximum number of characters in the symbol data).

## Length


**Definition:** Defines the length (in consecutive characters) that will be extracted and placed in user-defined output.

**Serial Cmd:** <**K740,output index,start location,length**>

**Default:** **0** (disabled; end of format cell array)

**Options:** 1 to *n* (maximum number of characters in the symbol data).

## Format Extract by ESP

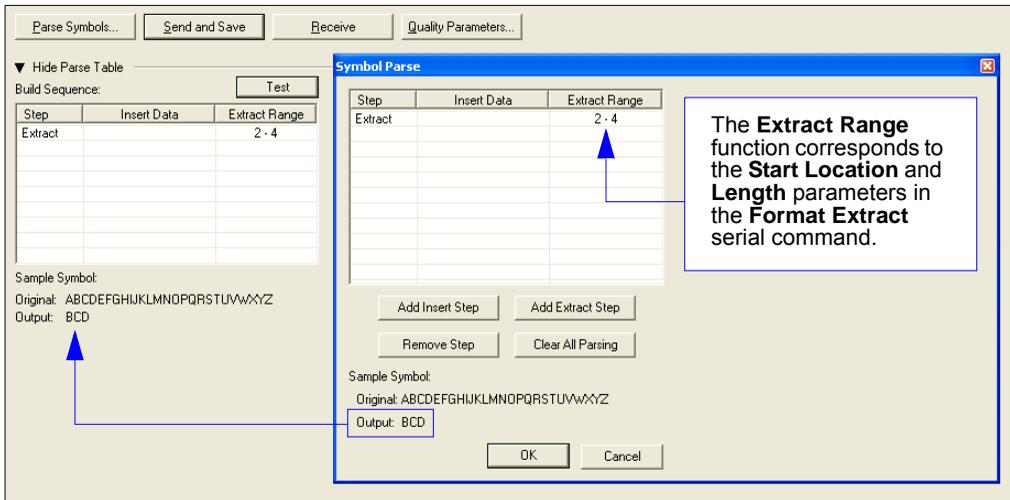

You can extract and insert several character sequences using **ESP's Symbol Parse** feature. In this example, the selected extraction range is characters 2-4. The "Sample Symbol" example on the **Symbol Parse** dialog shows the selected character positions extracted and output as desired. Simultaneously, the data string from the actual selected symbol is displayed at the bottom left of the **Parse Table**, followed by the user-defined extracted output.

# Format Insert

## Output Index

**Definition:** **Output Index** refers to the database entry you wish to modify with this command. A formatted output is built by extracting data from a symbol's original data output and/or *inserting user-defined characters*.

It may be helpful to think of individual indexes as positions in the final formatted output you wish to build. Starting with index # 1, enter either an extract or insert command to begin building your desired output string. Then, with the next index number, enter either an extract or insert command to continue building the output string. Continue this process until you are finished building the string.

**Serial Cmd:** <**K741**,*output index*,*length*,*hex string*>

**Options:** 1 to 100

## Length

**Definition:** Specifies the length of the user-defined character string that will be inserted. This function is limited to 4 characters per output index, so multiple indexes must be entered in order to insert longer character sequences.

For example, if you wish to insert a 10 character sequence in user-defined output, you would need three commands with consecutive index numbers, where the first two character sequence lengths were 4 and the third was 2.

**Serial Cmd:** <**K741**,*output index*,**length**,*hex string*>

**Default:** **0** (disabled; end of format cell array)

**Options:** 1 to 4

## Hex String

**Definition:** Specifies a character string that represents ASCII characters to be inserted in the database entry. Two hex characters are required for every ASCII character to be inserted in the user-defined output string. These two characters comprise the hex (base 16) value of the ASCII character.

For example, if you wanted to enter the three-character sequence "Hi!" you would enter **3** for the length of the string, and a hex sequence of **486921** for the ASCII sequence to be inserted. (48 = H; 69 = i; 21 = !)

**Important:** Each pair of hex characters represents one ASCII character. Hex character pairs range from 00 to FF. Since you are limited to 4 ASCII characters per insertion per database entry, you are likewise limited to 8 hex characters per insertion per database entry.

**Serial Cmd:** <**K741**,*output index*,*length*,**hex string**>

**Default:** **NUL (00** in hex)

**Options:** 00 to FF (As many as 4 bytes, or hex pairs.)

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

# Format Insert by ESP

**Symbol Parse**

Step	Insert Data	Extract Range
Insert		

Buttons: Add Step, Remove Step, Clear All Parsing

Sample Symbol Parse:  
Original: ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789  
Output:

**Insert**

SP SP

SOH	STX	ETX	EOT	ENQ
ACK	BEL	BS	HT	LF
VT	FF	CR	SO	SI
SI	DC1	DC2	DC3	DC4
NAK	SYN	ETB	CAN	EM
SUB	ESC	FS	GS	RS
US	SP			

Click 'Delete' to remove characters.

Buttons: OK, Cancel

The **Format Insert** process is very similar to the **Format Extract** process, except that **Insert** allows you to enter characters using the **Insertion Calculator** (shown above).

Buttons: Parse Symbols, Send and Save

▼ Hide Parse Table

Build Sequence: Test

Step	Insert Data	Extract Range
Insert	SP SP	
Extract		3 - 5

Buttons: Add Step, Remove Step, Clear All Parsing

Sample Symbol Parse:  
Original: micro  
Output: cro

**Symbol Parse**

Step	Insert Data	Extract Range
Insert	SP SP	
Extract		3 - 5

Buttons: Add Step, Remove Step, Clear All Parsing

Sample Symbol Parse:  
Original: ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789  
Output: CDE

Buttons: OK, Cancel

Notice that **Extract** and **Insert** share the same **Parse Table**.

---

# Output Filter Configuration

*Definition:* Output filtering is a method of providing a set of Good Read qualifiers and also providing ordered output. There is a filter for up to the first 10 positions in a multisymbol output. The first filter corresponds to the first symbol output at the end of the read cycle. Each filter has settings for the following four parameters: **Symbology Type**, **Symbol Length**, **Data**, and **IP Database Number**.

*Serial Cmd:* <**K744**,*filter number,symbology type,length,wildcard,placeholder,data,unused,database index*>

## ***Rules for Output Filter Configuration***

### **Output Filter Configuration Rule # 1**

Each symbol that is decoded must match one of the filters before it can be saved to a read cycle record. There is an exception to this rule, however, when the number of symbols required for a read cycle exceeds the number of active filters. In such a case, unfiltered symbols can be placed into unfiltered output positions.

For example, if the number of symbols required is 6 but there are only 4 active filters, the last 2 positions can be filled by any (unfiltered) qualified symbol.

### **Output Filter Configuration Rule # 2**

The same filter setup can be used multiple times.

For example, filters 1, 2, and 3 can be set up to filter Data Matrix symbols, and the output will occur in the order the symbols are decoded.

### **Output Filter Configuration Rule # 3**

All qualified symbols will be sorted and output in the matching filter position. If a symbol matches filter 3, it will be output as the third symbol. If a filter does not have a matching qualified symbol, a No Read message will be output in place of the symbol (assuming the No Read message is enabled).

For example, if there is not a symbol that meets filter 3's requirements, then a No Read message will be output in the third output position.

## Filter Number

**Definition:** This is the filter index number that represents the position of the symbol in the data output at the end of the read cycle. This index number should be entered along with the following filter settings for the predetermined symbol position.

**Serial Cmd:** <**K744**, **filter number**, *symbology type*, *length*, *wildcard*, *placeholder*, *data*, *unused*, *database index*>

**Options:** 1 to 10

## Symbology Type

**Definition:** Specifies the symbology type allowed to occupy this location in multi-symbol output.

**Note:** To filter or order a symbol, the symbol must meet all the requirements of the selected filter index.

**Serial Cmd:** <**K744**, *filter number*, **symbology type**, *length*, *wildcard*, *placeholder*, *data*, *unused*, *database index*>

**Default:** **0** (any symbology type)

**Options:**

- 0 = Any type
- 1 = Interleaved 2 of 5
- 2 = Code 39
- 3 = Code 128
- 4 = Codabar
- 5 = UPC
- 6 = PDF417
- 7 = EAN-128
- 8 = Code 93
- 9 = PharmaCode
- 10 = GS1 DataBar (RSS)
- 11 = MicroPDF417
- 12 = Composite
- 13 = BC412
- 14 = Data Matrix
- 15 = QR Code
- 16 = Cap
- 17 = Tube

## Length

**Definition:** Specifies the length of the decoded symbol allowed to occupy this location in multi-symbol output.

**Note:** To filter or order a symbol, the symbol must meet all requirements of the selected filter index.

**Serial Cmd:** <**K744**, filter number, symbology type, **length**, wildcard, placeholder, data, unused, database index>

**Default:** **0**

**Options:** 0 to 64

## Wildcard

**Definition:** This is the character to be used in the data output field when performing a data filter comparison. The wildcard character represents the end of matching, and allows for variable lengths of symbol output.

**Serial Cmd:** <**K744**, filter number, symbology type, length, **wildcard**, placeholder, data, unused, database index>

**Default:** “ \* ” = **2A** (hex)

**Options:** Any ASCII input in the form of a pair of hex characters.

**Example:**

2A = \*

00 = disabled

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Placeholder

**Definition:** The placeholder character requires a character to be present, but does not compare the data value.

**Serial Cmd:** <**K744**, filter number, symbology type, length, wildcard, **placeholder**, data, unused, database index>

**Default:** “ ? ” = **3F** (hex)

**Options:** Any ASCII input in the form of a pair of hex characters.

**Example:**

3F = ?

00 = disabled

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Data

**Definition:** This is the data string to be used when comparing symbol data for output filtering and ordering. This data string may also contain wildcard and placeholder characters to facilitate matching. Remember that in order to filter or order symbol data, it must meet all the requirements of the selected filter index.

**Examples:**

- Filter data = "123\*". This will match data strings of "123", "123456", and "123ABC", but not "12".
- Filter data = "123\*AB?C". This will be interpreted as "123\*".
- Filter data = "123?". This will match "1234" and "123A", but not "123", "12345", or "1234C".
- Filter data = "123?A". This will match "1234A" and "123BA", but not "123", "1234C", or "1234ABCD".
- Filter data = "123?A?". This will match "1234AB" and "123BAT", but not "1234A" or "123BATS".
- Filter data = "12??\*". This will match "1234", "123456", and "123ABC", but not "12" or "123".
- Filter data = "123?A\*". This will match "1234A", "123BA", and "123BATS", but not "1234" or "1234C".

**Serial Cmd:** <**K744**,filter number,symbology type,length,wildcard,placeholder,**data**,unused,database index>

**Default:** **NUL** (00 in hex)

**Options:** Any ASCII input in the form of a pair of hex characters.  
Maximum length: 63 bytes defined.

**Examples:**

41422A = AB\*

Data [0] = **NUL** represents string matching disabled.

See [ASCII Character Entry Modifier](#) on page 4-33 for a detailed explanation of how to enter ASCII characters as hex values.

## Database Index

**Definition:** The index of the database entry that decodes a given symbol must equal this setting for filtering to occur. A setting of **0** allows any database index for this filter entry.

**Serial Cmd:** <**K744**,filter number,symbology type,length,wildcard,placeholder,**data**,unused,**database index**>

**Default:** **0** (any index)

**Options:** 0 to 10

## Ordered Output Filter

*Definition:* **Number of Filters** refers to the number of active output filters. **0** disables all output filters. Any non-zero numeral will enable filtering to be performed using the filter indexes covered by this value.

For example, if the number of filters is **1**, then only filter index # 1 will be applied. If the number of filters is **2**, then only filter index # 1 and filter index # 2 will be applied, etc.

*Serial Cmd:* **<K745,number of filters>**

*Default:* **0**

*Options:* 0 to 10



# Appendices

## Contents

- Appendix A General Specifications ..... A-2
- Appendix B Electrical Specifications ..... A-5
- Appendix C Serial Configuration Commands ..... A-8
- Appendix D Communications Protocol ..... A-15
- Appendix E ASCII Table ..... A-24
- Appendix F Interface Standards ..... A-25
- Appendix G Using an External Trigger ..... A-26
- Appendix H Operational Tips ..... A-27
- Appendix I USB-to-Serial Virtual COM Port Driver ..... A-28
- Appendix J Glossary of Terms ..... A-31

# Appendix A — General Specifications

## Mechanical

**Height:** 1" (25.4 mm)  
**Width:** 1.8" (45.7 mm)  
**Depth:** 2.10" (53.3 mm)  
**Weight:** 2 oz. (57 g)

## Environmental

**Enclosure:** IP54, category 2  
**Operating Temperature:** 0° to 50°C (32° to 122°F)  
**Storage Temperature:** -50° to 75° C (-58 to 167°F)  
**Humidity:** Up to 90% (non-condensing)

## CE Mark

**General Immunity for Light Industry:** EN 55024:1998 ITE Immunity Standard  
**Radiated and Conducted Emissions of ITE Equipment:** EN 55022:1998 ITE Disturbances

## Light Source

**Type:** High-output white LEDs

## Light Collection Options

Progressive scan, square pixel. Software adjustable shutter speed, electronic shutter

**EZ Match Color:** 2048 x 832

**EZ Match:** 1280 x 1024

## Symbologies

**2D Symbologies:** Data Matrix (ECC 0-200), QR Code

**Stacked Symbologies:** PDF417, MicroPDF417, GS1 DataBar (Composite and Stacked)

**Linear Symbologies:** Code 39, Code 128, BC412, Interleaved 2 of 5, Pharmacode, UPC/EAN, Codabar, Code 93

## Read Parameters

**Pitch:** ±30° **Skew:** ±30° **Tilt:** 360°  
**Decode Rate:** Up to 10 decodes per second

## Connector

**Type:** 3 ft. cable terminated with High Density 15-pin D-Sub socket connector or USB type A connector

## Indicators

**LEDS:** Read Performance, Power, Read Status

**Green Flash:** Good Read

**Blue Target Pattern:** Symbol locator

**Beeper:** Good Read, match/mismatch, No Read, serial command confirmation, on/off

## Communication Protocols

**Standard Interfaces:** RS-232, RS-422, USB


## Discrete I/O

**Trigger Input:** 5 to 28VDC rated (.16 mA)

**New Master:** 5 to 28VDC rated (.16 mA)


**Outputs (1, 2, 3):** 5V TTL compatible; can sink 10 mA and source 10mA

**Optional I/O:** Optoisolated (with IC-332 accessory)

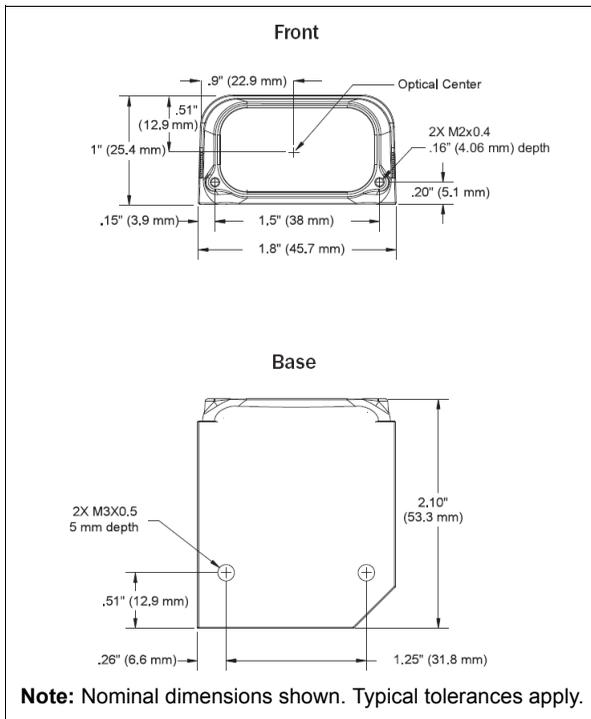

*EZ Match Imager Dimensions*

**Read Ranges**

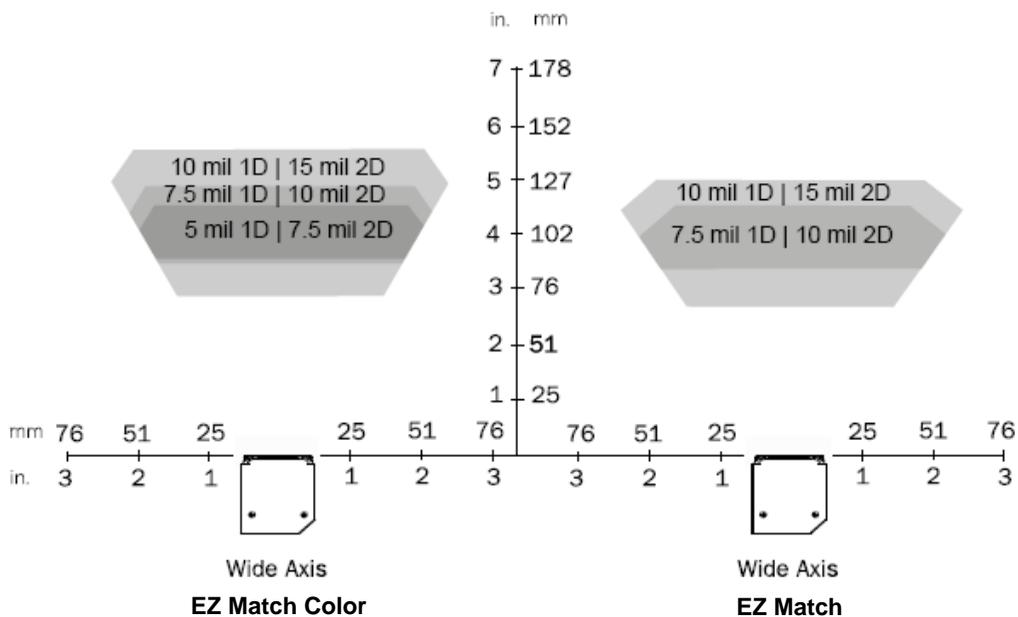

<b>EZ Match Color</b>			
<b>Narrow-bar-width</b>		<b>Field of View (maximum)</b>	<b>Read Range</b>
<b>1D</b>	<b>2D</b>		
.005" (.13 mm)	.0075" (.19 mm)	4.2" (106.7 mm)	3.6 to 4.5" (91.4 mm to 114.3 mm)
.0075" (.19 mm)	.010" (.25 mm)	4.5" (114.3 mm)	3.4 to 4.9" (86.4 mm to 124.5 mm)
.010" (.25 mm)	.015" (.38 mm)	5.5" (139.7 mm)	2.9 to 5.6" (73.7 mm to 142.2 mm)

<b>EZ Match</b>			
<b>Narrow-bar-width</b>		<b>Field of View (maximum)</b>	<b>Read Range</b>
<b>1D</b>	<b>2D</b>		
.0075" (.19 mm)	.010" (.25 mm)	4.2" (106.7 mm)	3.3 to 4.5" (83.8 mm to 114.3 mm)
.010" (.25 mm)	.015" (.38 mm)	4.5" (114.3 mm)	2.75 to 5.0" (69.9 mm to 127 mm)

---

## General Specifications

### Safety Certifications

FCC, UL/cUL, CE, CB, RoHS/WEEE



### ISO 9001 Registered Company



©2015 Microscan Systems, Inc.

All rights reserved. Specifications subject to change.

Product specifications are given for typical performance at 25°C (77°F) using grade A labels. Performance characteristics may vary at high temperatures or other environmental extremes. Warranty—One year limited warranty on parts and labor. Extended warranty available.

## Appendix B — Electrical Specifications

**Power:** 3.5 Watts (max.)

5VDC +/- 5%, 200 mV p-p max. ripple, 440 mA @ 5VDC (typ.)

**Optional Int:** 10-28V Accy

### Host Connector / Pin Assignments

#### High Density 15 Pin D-sub Socket Connector

Pin	Host RS-232	Host/Aux RS-232	Host RS-422/485	In/Out
1	Power +5 VDC			In
2	TxD	TxD	TxD(-)	Out
3	RxD	RxD	RxD(-)	In
4	Power/Signal Ground			
5	NC			
6	RTS	Aux TxD	TxD(+)	Out
7	Output 1 TTL a			Out
8	Default configuration b			In
9	Trigger			In
10	CTS	Aux RxD	RxD(+)	In
11	Output 3 TTL a			Out
12	New Master (NPN)			In
13	Chassis ground c			
14	Output 2 TTL a			Out
15	NC			

a. Can sink 10 mA and source 10 mA.

b. The default is activated by connecting pin 8 to ground pin 4.


c. Chassis ground: Used to connect chassis body to earth ground only. Not to be used as power or signal return.

### Optoisolator Outputs

Optoisolator circuits can transfer pulses between the imager and peripherals with no direct connection with the imager's internal circuitry. However, not every optoisolator configuration provides complete isolation. The following diagrams show both fully optoisolated and non-optoisolated circuits. They are only examples and do not represent all the possible wiring configurations.

	$I_{load}=5\text{mA}$	$I_{load}=50\text{mA}$	$I_{load}=100\text{mA}$
$V_{Out-On}^a$	0.5V	0.5V	1.0V
$t_{On-Typ}$	5mS	0.7mS	0.8mS
$t_{Off-Typ}$	5 $\mu$ S	5 $\mu$ S	5 $\mu$ S

a. Voltage drop across output when activated.

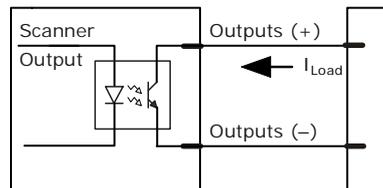


### Output Circuit Examples

#### Fully Optoisolated

This circuit is fully optoisolated and is the recommended configuration. It allows the user to apply 1 to 28 VDC to the circuit.


**Caution:** The maximum current that can pass through the optoisolator is 100mA.

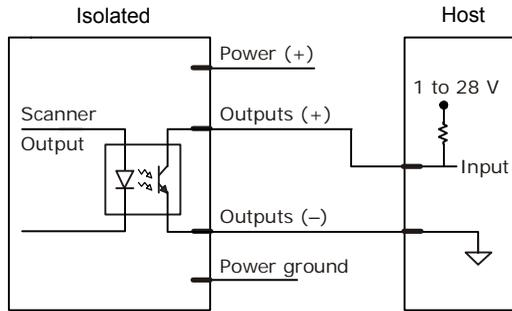



#### Not Optoisolated, Imager Grounded

In this diagram, power is applied externally, but the scanner's power ground is used to complete the circuit. This setup involves some risk to the optoisolator if excessive voltages are applied.

**Caution:** The maximum current that can pass through the optoisolator is 100mA.

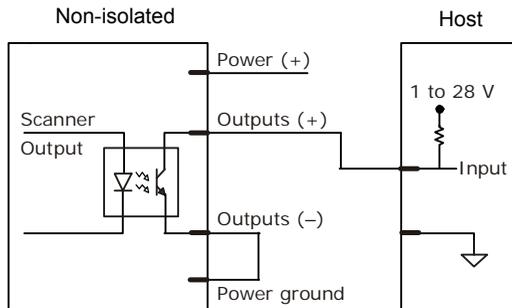


### Additional Output Circuit Examples

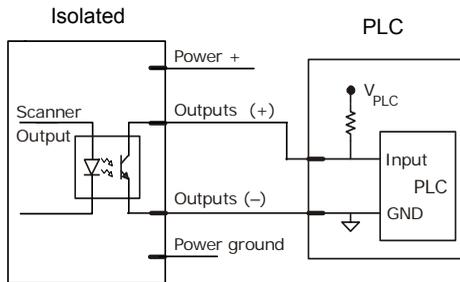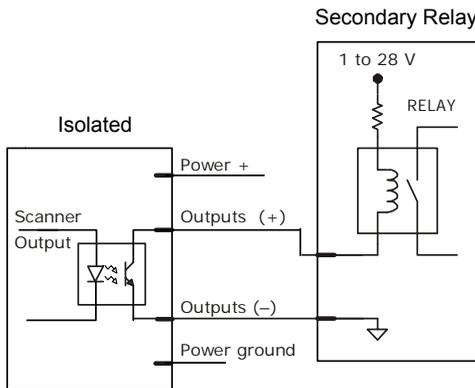

## Optoisolator Inputs

All discrete inputs can be fully isolated pulses as PNP or NPN circuits.


	Minimum	Maximum
$V_{IN-HIGH}/I_{IN-HIGH}$	4.5 V/3.0 mA	28 V/23 mA
$V_{IN-LOW}/I_{IN-LOW}$	0 V/0 mA	2.0 V/1 mA
Pulse Width <sub>min</sub>	48 $\mu$ S	

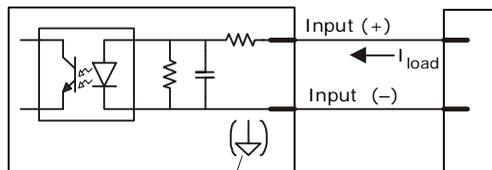

New master pin input (-) is internally grounded.


## Input Examples

### Fully Optoisolated

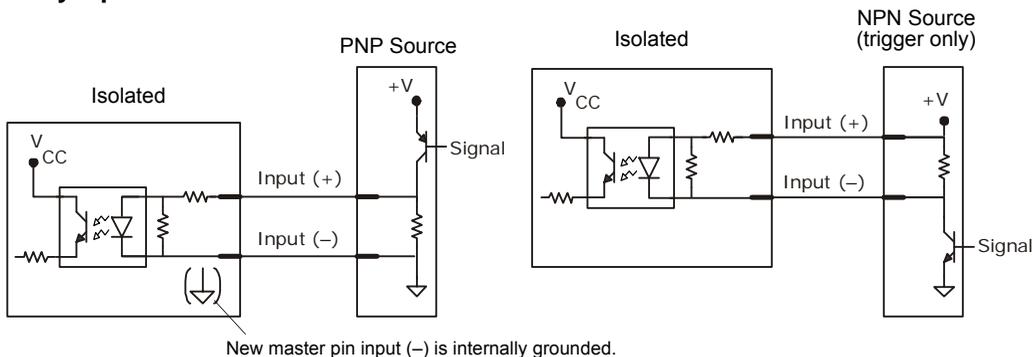

New master pin input (-) is internally grounded.

### Not Optoisolated

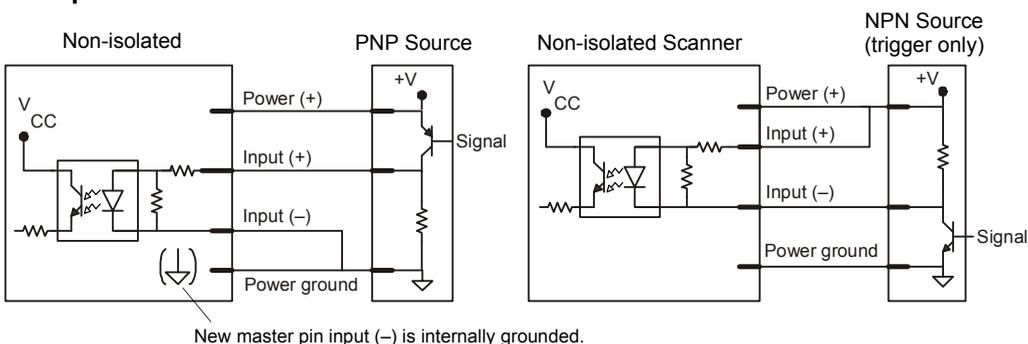

New master pin input (-) is internally grounded.

# Appendix C — Serial Configuration Commands

## Tube/Cap Inspection

Active Tube/Cap Library Indexes	<K257,number of active indexes>
Tube/Cap Dimensions	<K258,index,tube diameter,cap base length,cap base diameter,cap tip diameter,hue,saturation,value>
Multi-Operation	<K260,index,operation,frame count,timeout,database min,database max>
Tube/Cap Information	<K850,separator,library index,tube angle,tube/cap tip position,cap color,match status,tube diameter>
Tube/Cap Message Formatting	<K851,cap presence message index,cap absence message index,cap unknown message index,tube presence message index,tube absence message index>
Tube/Cap Message Editing	<K852,index,message>

## Communications

Host Port Connections	<K100,baud rate,parity,stop bits,data bits>
Auxiliary Port Connections	<K101,aux port mode,baud rate,parity,stop bits,data bits,daisy chain ID status,daisy chain ID>
RS-422 Status	<K102,status>
Host Port Protocol	<K140,protocol,address>
Preamble	<K141,status,preamble characters>
Postamble	<K142,status,postamble characters>
Response Timeout	<K143,response timeout>
LRC	<K145,status>
Auxiliary Port System Data Status	<K146,aux port system data status>
ACK/NAK Options	<K147,RES,REQ,STX,ETX,ACK,NAK>
Polling Mode Options	<K148,RES,REQ,STX,ETX,ACK,NAK>
Autoconfiguration Daisy Chain	<K150DAISY>

## Calibration

Calibration Options	<K529,gain,shutter speed,symbol type,WOI framing,WOI margin,line scan height,processing>
---------------------	--

## Read Cycle

Trigger Mode/Duration	<K200,trigger mode,trigger filter duration>
Serial Trigger Character	<K201,serial trigger character>
External Trigger State	<K202,external trigger state>
End of Read Cycle	<K220,end of read cycle,read cycle timeout>
Minimum Good Reads	<K221,minimum good reads>
Multisymbol	<K222,number of symbols,multisymbol separator>
Start Trigger Character	<K229,start character>
Stop Trigger Character	<K230,stop character>
Capture Mode	<K241,capture mode,number of captures,rapid capture mode,pre-processing>
Capture Timing	<K242,time before first capture,time between first and second captures,,,,,,,,time between seventh and eighth captures>

Image Storage	<K244,image storage type,image store mode>
<b>Symbologies</b>	
Narrow Margins/Symbology ID	<K450,narrow margin status,symbology identifier status>
Background Color	<K451,background color>
Composite	<K453,symbology status,separator status,separator>
Code 39	<K470,status,check character status,check character output status, large intercharacter gap,fixed symbol length status,fixed symbol length,full ASCII set>
Codabar	<K471,status,start/stop match,start/stop output,large intercharacter gap,fixed symbol length status,symbol length,check character type,check character output>
Interleaved 2 of 5	<K472,status,check character status,check character output status, symbol length #1, symbol length #2, guard bar status,range mode status>
UPC/EAN	<K473,UPC status,EAN status,supplemental status,separator status, separator character,supplemental type,format UPC-E as UPC-A>
Code 128/EAN-128	<K474,status,fixed symbol length status,fixed symbol length,EAN-128 status,output format,application record separator status,application record separator character,application record brackets,application record padding>
Code 93	<K475,status,fixed symbol length status,symbol length>
PDF417	<K476,status,[unused],fixed symbol length status,fixed symbol length,[unused],codeword collection>
Pharmacode	<K477,status,fixed bar count status,fixed bar count,minimum bar count,bar width mode,direction,fixed threshold value>
Data Matrix	<K479,ECC 200 status,ECC 000 status,ECC 050 status,ECC 080 status,ECC 100 status,ECC 140 status,ECC 120 status,ECC 130 status>
QR Code	<K480,status>
BC412	<K481,status,check character output,fixed symbol length status, fixed symbol length>
DataBar-14	<K482,status>
DataBar Limited	<K483,status>
DataBar Expanded	<K484,status,fixed symbol length status,fixed symbol length>
MicroPDF417	<K485,status,[unused],fixed symbol length status,fixed symbol length>
<b>I/O Parameters</b>	
Power On/Reset Counts	<K406,power-on,resets,power-on saves,power-on flash saves,power-on tube/cap library saves>
Time Since Reset	<K407,hours,minutes>
Service Message	<K409,status,service message,threshold,resolution>
Serial Verification	<K701,serial command echo status,serial command beep status, control/hex output>
Beeper	<K702,status>
Quality Output	<K704,quality output separator,decodes/trigger status>
Symbol Data Output	<K705,symbol data output status,when to output>
Read Duration Output	<K706,status,separator>

## Communication Protocol Commands

No Read Message	<K714,status,message>
Bad Symbol Message	<K715,[unused],message>
No Symbol Message	<K716,[unused],message>
1D/Stacked Symbology Qualification	<K717,minimum number of bars,minimum number of qualified scan lines,start/stop status>
2D Symbology Qualification	<K718,finder pattern status,symbol size status,symbol size 1,symbol size 2,symbol size tolerance,dimension status,dimension 1,dimension 2,dimension tolerance,orientation status,orientation value>
Frame Information	<K734,output frame number,output coordinates>
LED Configuration	<K737,LED mode,ISO/IEC 16022 grade>
Image Output	<K739,image output mode,communication port,file format,JPEG quality>
Target/Flood LEDs	<K750,green flash LED status,target pattern LED status,green flash duration>
EZ Trax Output	<K757,status,comm port,image mode,image format,JPEG quality,object info output,grade output,color>
Database Identifier Output	<K759,status,separator>
EZ Button	<K770,global status,default on power-on,load IP database,save for power-on>
EZ Button Modes	<K771,single beep,two beeps,three beeps,four beeps>
Trend Analysis Output 1	<K780,trend analysis mode,trigger evaluation period,number to output on,decodes/trigger threshold>
Trend Analysis Output 2	<K781,trend analysis mode,trigger evaluation period,number to output on,decodes/trigger threshold>
Trend Analysis Output 3	<K782,trend analysis mode,trigger evaluation period,number to output on,decodes/trigger threshold>
Diagnostic Output 1	<K790,unused 1,service unit>
Diagnostic Output 2	<K791,unused 1,service unit>
Diagnostic Output 3	<K792,unused 1,service unit>
ISO/IEC 16022 Symbol Quality Output 1	<K800,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC, unused ECC threshold>
ISO/IEC 16022 Symbol Quality Output 2	<K801,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC, unused ECC threshold>
ISO/IEC 16022 Symbol Quality Output 3	<K802,output on symbol contrast,symbol contrast threshold,output on print growth,print growth threshold,output on axial non-uniformity,axial non-uniformity threshold,output on unused ECC, unused ECC threshold>
Configurable Output 1	<K810,output on,output state,pulse width,output mode>
Configurable Output 2	<K811,output on,output state,pulse width,output mode>
Configurable Output 3	<K812,output on,output state,pulse width,output mode>
Tube/Cap Detection Output 1	<K860,mode,output on>
Tube/Cap Detection Output 2	<K861,mode,output on>

Tube/Cap Detection Output 3 <K862,mode,output on>

**Symbol Quality**

Symbol Quality Separator/ Data Matrix Output Mode <K708,symbol quality separator,data matrix output mode>

ISO/IEC 16022 Symbol Quality Output <K709,symbol contrast,print growth,axial non-uniformity,unused ECC>

Microscan Symbol Quality Output <K710,percent cell damage,total read time,capture time,locate time,decode time,pixels per element,ECC level,matrix size,quiet zone,symbol angle>

**Matchcode**

Matchcode Type <K223,matchcode type,sequential matching,match start position,match length,wild card character,sequence on No Read,sequence on mismatch>

Number of Master Symbols <K224,number of master symbols>

New Master Pin <K225,status>

Enter Master Symbol Data <K231,master symbol number,master symbol data>

Request Master Symbol Data <K231?,>[for all] or <K231?,master symbol number>

Delete Master Symbol Data <K231,master symbol number,>

Match Replace <K735,status,match replacement string>

Mismatch Replace <K736,status,mismatch replacement string>

**Camera and IP Setup**

IP Timeout <K245,image processing timeout>

IP Threshold <K512,threshold mode,fixed threshold value,cycle min,cycle max,cycle step,adaptive contrast percent>

Mirrored Image <K514,mirrored image>

Window of Interest <K516,row pointer,column pointer,row depth,column width>

Hollow Mode <K517,hollow mode status>

Number of Symbols in Field of View <K518,number of symbols in field of view>

Damaged Symbol <K519,damaged symbol status>

Focal Distance (Read-Only) <K525,focal distance>

Focal Distance Table (Read-Only) <K526,number of focal distances,focal distance>

IP Mode <K527,IP Mode,FLM direction>

Tube/Cap Mode <K533,tube/cap direction,tube/cap rotation,cap unknown qualify,tube/cap presence before output,cap unknown presence before output>

Illumination Brightness <K536,brightness>

Skew Correction <K537,line speed,symbol direction>

Camera Parameters <K541,shutter speed,gain>

Pixel Sub-Sampling <K542,sub-sampling>

Color Filter (EZ Match Color Only) <K543,color filter>

Color Detection (EZ Match Color Only) <K544,status,color match resolution>

**IP Database**

Number of Active Indexes <K252,number of active database settings>

## Serial Configuration Commands

IP Database Status	<K255,index,shutter speed,gain,sub-sampling,row pointer,column pointer,row depth, column width,threshold mode,fixed threshold value,processing mode, narrow margins, background color,symbology type>
Save Current Settings to Database	<K255+,index>
Load Current Settings from Database	<K255-,index>
Request Selected Index Settings	<K255?,index>
Request All Database Settings	<K255?>
Database Mode	<K256,switch mode,frame count/time,image process looping,image dimensions>

### Output Format

Format Extract	<K740,output index,start location,length>
Format Insert	<K741,output index,length,hex string>
Format Assign	<K742,symbol number,status>
Format Status	<K743,output format status>
Output Filter Configuration	<K744,filter number,symbology type,length,wildcard, placeholder, data,unused,database index>
Ordered Output Filter	<K745,number of filters>

## Serial Command Format

Serial commands are of two types: utility and configuration.

### Rules that apply to both utility and configuration commands

- A less than < and greater than > character enclose the commands.
- Commands and data are “case sensitive.” That is, characters must be entered as upper or lower case, as specified.

### Serial Utility Commands

These are sent during operations and are not followed by <A> or <Z>.

### Serial Configuration “K” Commands

These begin with a single “K” character followed by a 3-digit numeric character, data fields, and an initializing command, as follows:

<Knumeric parameter,data,data,...etc.><initializing command>

An initializing command <A> or <Z> may follow the command. A <Z> initializes the imager’s memory and saves for power-on; an <A> initializes the imager’s memory but does not save for power-on.

For example, to enable **UPC** and save the change for power-on, send <K473,1><Z>.

To change **Baud Rate** and reset without saving changes for power-on, send <K100,3><A>.

### Serial Configuration Command Conventions

- All data fields (except the last) must be followed by a comma (*without a space*).
- **NUL** cannot be used. The characters <, >, and , can be used, but only if entered as hex pairs (see [ASCII Character Entry Modifier](#) on page 4-33).
- All fields preceding a modified field must be included.
- If there is no change in preceding fields, then commas alone can be entered in these fields. For example, if only the last field in the following command is changing, <K100,4,1,0,0> can be entered as <K100,,,,0>.
- All fields *following* a modified field can be omitted. For example, to change **Baud Rate** only, send <K100,3>.

## Concatenating Configuration Commands

Commands can be concatenated (added together) in a single string or data block. For example, **<K145,1><K220,1><K450,1><A>** enables **LRC**, sets **End of Read Cycle** mode to **New Trigger**, enables **Narrow Margins**, and resets the data buffers (without saving the changes for power-on).

## Serial Command Status Request

To ensure that any command was received and accepted, you can send the **Show Reader Status** command: **<?>**.

The status of a specific serial command can be requested by entering the command followed by a question mark. For example, send **<K142?>** to request the status of **Postamble**.

## Entering Control Characters in Serial Commands

To enter control characters within a serial command, hold down the **Ctrl** key while typing the desired character.

*Example:* To enter a carriage return and line feed (**^M^J**), enter **<K141,1,CNTL-m CNTL-j>**

## Appendix D — Communications Protocol

### Communications Protocol Command Table

Protocol Command (Mnemonic displayed on menu)	Control Characters (Entered in menu or serial command)	Hex Value	Effect of Command
RES	^D	04	Reset
REQ	^E	05	Request
EOT	^D	04	Reset
STX	^B	02	Start of Text
ETX	^C	03	End of Text
ACK	^F	06	Acknowledge
NAK	^U	15	Negative Acknowledge
XON	^Q	11	Begin Transmission
XOFF	^S	13	Stop Transmission

## ACK / NAK Data Flow Examples

### Setup 1

RES	0x00 (disabled)
REQ	0x00 (disabled)
STX	0x00 (disabled)
ETX	0x00 (disabled)
<b>ACK</b>	0x06
<b>NAK</b>	0x15
LRC	disabled

#### Transfer 1

HOST_TX	<K141,0>
IMAGER_TX	'ACK'

#### Transfer 2

HOST_TX	<K141?>
IMAGER_TX	'ACK'
IMAGER_TX	<K141,0>
HOST_TX	'ACK'

### Error Condition

#### Transfer 1

IMAGER_TX	symbol data
HOST_TX	'NAK' (host rejects)
IMAGER_TX	symbol data (resend data)
HOST_TX	'ACK' (transaction complete)

#### Transfer 2

HOST_TX	<K141?>
IMAGER_TX	'ACK'
IMAGER_TX	<K141,0>
	timeout reached...
	timeout reached...
	timeout reached...
Timeout Reached	transaction aborted, data is flushed

## Setup 2

RES	0x00 (disabled)
REQ	0x00 (disabled)
STX	0x00 (disabled)
ETX	0x00 (disabled)
<b>ACK</b>	0x06
<b>NAK</b>	0x15
<b>LRC</b>	enabled

### *Transfer 1*

HOST_TX	<K141,0>a
IMAGER_TX	'ACK'

### *Transfer 2*

HOST_TX	<K141?>B
IMAGER_TX	'ACK'
IMAGER_TX	<K141,0>a
HOST_TX	'ACK'

## **Error Condition**

### *Transfer 1*

HOST_TX	<k141,0>x (BAD LRC)
IMAGER_TX	'NAK'
HOST_TX	<K141,0>a (GOOD LRC)
IMAGER_TX	'ACK'

### **Setup 3**

<b>RES</b>	0x00 (disabled)
<b>REQ</b>	0x00 (disabled)
<b>STX</b>	0x28 '('
<b>ETX</b>	0x29 ')'
<b>ACK</b>	0x06
<b>NAK</b>	0x15
<b>LRC</b>	enabled

#### *Transfer 1*

HOST_TX	(<K141,0>)H
IMAGER_TX	'ACK'

#### *Transfer 2*

HOST_TX	(<K141?>)k
IMAGER_TX	'ACK'
IMAGER_TX	(<K141,^M>)w
HOST_TX	'ACK'

## Setup 4

**RES**      0x21 '!'
   
**REQ**      0x3D '='
   
**STX**      0x28 '('
   
**ETX**      0x29 ')'
   
**ACK**      0x06
   
**NAK**      0x15
   
**LRC**      enabled

### Transfer 1

HOST\_TX      (<K141,0>)H
   
 IMAGER\_TX    'ACK'

### Transfer 2

HOST\_TX      (<K100?>)n
   
 IMAGER\_TX    'ACK'
   
 HOST\_TX      '!'
   
 IMAGER\_TX    (<K100,8,0,0,1>)X
   
 HOST\_TX      'ACK'
   
 IMAGER\_TX    '!'

## Error Condition

### Transfer 1

HOST\_TX      (<K141,0>)H
   
 IMAGER\_TX    'ACK'
   
 HOST\_TX      (<K100?>)n
   
 IMAGER\_TX    'ACK'
   
 HOST\_TX      '!'
   
 IMAGER\_TX    (<K100,8,0,0,1>)X
   
               timeout reached...
   
 IMAGER\_TX    '='
   
               timeout reached...
   
 IMAGER\_TX    '='
   
               timeout reached...
   
 IMAGER\_TX    '='
   
               timeout reached...
   
 IMAGER\_TX    '!'

## Polling Mode Data Flow Examples

### Setup 1

<b>Address</b>	0x01 (translates to) Poll Req @ '0x1C', Unit Select @ '0x1D'
<b>RES</b>	0x04
<b>REQ</b>	0x05
<b>STX</b>	0x02
<b>ETX</b>	0x03
<b>ACK</b>	0x06
<b>NAK</b>	0x15
<b>LRC</b>	disabled

#### Transfer 1

HOST_TX	'RES' '0x1D' 'REQ' (Select Unit 1 to receive data)
IMAGER_TX	'0x1D' 'ACK' (Unit responds with its address)
HOST_TX	'STX' <T> 'ETX'
IMAGER_TX	'0x1D' 'ACK' (Unit responds with its address)
HOST_TX	'RES' (Terminate Transfer 2)

#### Transfer 2

HOST_TX	'RES' '0x1C' 'REQ' (Poll Unit 1 for data)
IMAGER_TX	'0x1C' 'STX' <T/00000> 'ETX'
HOST_TX	'ACK'
IMAGER_TX	'RES' (Terminate Transfer 1)

Starting with a 'RES' ensures a clean transaction, without "leftovers" from the previous transaction.

### Error Condition 1

HOST_TX	'RES' '0x1C' 'REQ' (Poll Unit 1 for data)
IMAGER_TX	'0x1C' 'STX' <T/00000> 'ETX'
HOST_TX	' <i>Nothing</i> ' (Host should 'ACK' here)
	timeout reached...
IMAGER_TX	'REQ' (Unit requests an 'ACK' again)
	timeout reached...
IMAGER_TX	'REQ' (Unit requests an 'ACK' again)
	timeout reached...
IMAGER_TX	'REQ' (Unit requests an 'ACK' again)
	timeout reached...
IMAGER_TX	'RES' (Terminate Transfer 1, data is flushed)

**Error Condition 2**

HOST\_TX           ‘RES’ ‘0x1C’ ‘REQ’ (Poll Unit 1 for data)  
IMAGER\_TX       ‘0x1C’ ‘STX’ <T/00000> ‘ETX’  
HOST\_TX           ‘*Nothing*’ (Host should ‘ACK’ here)  
                  timeout reached...  
IMAGER\_TX       ‘REQ’ (Unit requests an ‘ACK’ again)  
HOST\_TX           ‘NAK’ (Host rejects data frame)  
                  (Retry Event)  
IMAGER\_TX       ‘0x1C’ ‘STX’ <T/00000> ‘ETX’ (Unit sends again)  
HOST\_TX           ‘ACK’ (Host receives data)  
IMAGER\_TX       ‘RES’ (Terminate Transfer 1)

The protocol makes 3 retry attempts before data is flushed and transfer is aborted.

## Setup 2

<b>Address</b>	0x01 (translates to) Poll Req @ '0x1C', Unit Select @ '0x1D'
<b>RES</b>	0x04
<b>REQ</b>	0x05
<b>STX</b>	0x02
<b>ETX</b>	0x03
<b>ACK</b>	0x06
<b>NAK</b>	0x15
<b>LRC</b>	enabled

### Transfer 1

HOST_TX	'RES' '0x1D' 'REQ' (Select Unit 1 to receive data)
IMAGER_TX	'0x1D' 'ACK' (Unit responds with its address)
HOST_TX	'STX' <T> 'ETX' 'LRC'
IMAGER_TX	'0x1D' 'ACK' (Unit responds with its address)
HOST_TX	'RES' (Terminate Transfer 2)

### Transfer 2

HOST_TX	'RES' '0x1C' 'REQ' (Poll Unit 1 for data)
IMAGER_TX	'0x1C' 'STX' <T/00000> 'ETX' 'LRC'
IMAGER_TX	'ACK'
HOST_TX	'RES' (Terminate Transfer 1)

Starting with a 'RES' ensures a clean transaction, without "leftovers" from the previous transaction.

### Error Condition 1

HOST_TX	'RES' '0x1C' 'REQ' (Poll Unit 1 for data)
IMAGER_TX	'0x1C' 'STX' <T/00000> 'ETX' 'LRC'
HOST_TX	'Nothing' (Host should 'ACK' here)
	timeout reached...
IMAGER_TX	'REQ' (Unit requests an 'ACK' again)
	timeout reached...
IMAGER_TX	'REQ' (Unit requests an 'ACK' again)
	timeout reached...
IMAGER_TX	'REQ' (Unit requests an 'ACK' again)
	timeout reached...
IMAGER_TX	'RES' (Terminate Transfer 1, data is flushed)

**Error Condition 2**

HOST\_TX 'RES' '0x1C' 'REQ' (Poll Unit 1 for data)  
 IMAGER\_TX '0x1C' 'STX' <T/00000> 'ETX' 'LRC'  
 HOST\_TX 'Nothing' (Host should 'ACK' here)  
 timeout reached...  
 IMAGER\_TX 'REQ' (Unit requests an 'ACK' again)  
 HOST\_TX 'NAK' (Host rejects data frame)  
 (Retry Event)  
 IMAGER\_TX '0x1C' 'STX' <T/00000> 'ETX' 'LRC' (Unit sends again)  
 HOST\_TX 'ACK' (Host receives data)  
 IMAGER\_TX 'RES' (Terminate Transfer 1)

**Error Condition 3**

HOST\_TX 'RES' '0x1C' 'REQ' (Poll Unit 1 for data)  
 IMAGER\_TX '0x1C' 'STX' <T/00000> 'ETX' 'BAD LRC'  
 HOST\_TX 'NAK' (Host rejects bad LRC data)  
 (Retry Event)  
 IMAGER\_TX '0x1C' 'STX' <T/00000> 'ETX' 'GOOD LRC' (Unit sends again)  
 HOST\_TX 'ACK' (Host receives data)  
 IMAGER\_TX 'RES' Terminate Transfer 1)

The protocol makes 3 retry attempts before data is flushed and transfer is aborted.

# Appendix E — ASCII Table

Dec	Hex	Mne	Ctrl	Dec	Hex	Ch	Dec	Hex	Ch	Dec	Hex	Ch
00	00	NUL	^@	32	20	SP	64	40	@	96	60	`
01	01	SOH	^A	33	21	!	65	41	A	97	61	a
02	02	STX	^B	34	22	"	66	42	B	98	62	b
03	03	ETX	^C	35	23	#	67	43	C	99	63	c
04	04	EOT	^D	36	24	\$	68	44	D	100	64	d
05	05	ENQ	^E	37	25	%	69	45	E	101	65	e
06	06	ACK	^F	38	26	&	70	46	F	102	66	f
07	07	BEL	^G	39	27	'	71	47	G	103	67	g
08	08	BS	^H	40	28	(	72	48	H	104	68	h
09	09	HT	^I	41	29	)	73	49	I	105	69	i
10	0A	LF	^J	42	2A	*	74	4A	J	106	6A	j
11	0B	VT	^K	43	2B	+	75	4B	K	107	6B	k
12	0C	FF	^L	44	2C	,	76	4C	L	108	6C	l
13	0D	CR	^M	45	2D	-	77	4D	M	109	6D	m
14	0E	SO	^N	46	2E	.	78	4E	N	110	6E	n
15	0F	SI	^O	47	2F	/	79	4F	O	111	6F	o
16	10	DLE	^P	48	30	0	80	50	P	112	70	p
17	11	DC1	^Q	49	31	1	81	51	Q	113	71	q
18	12	DC2	^R	50	32	2	82	52	R	114	72	r
19	13	DC3	^S	51	33	3	83	53	S	115	73	s
20	14	DC4	^T	52	34	4	84	54	T	116	74	t
21	15	NAK	^U	53	35	5	85	55	U	117	75	u
22	16	SYN	^V	54	36	6	86	56	V	118	76	v
23	17	ETB	^W	55	37	7	87	57	W	119	77	w
24	18	CAN	^X	56	38	8	88	58	X	120	78	x
25	19	EM	^Y	57	39	9	89	59	Y	121	79	y
26	1A	SUB	^Z	58	3A	:	90	5A	Z	122	7A	z
27	1B	ESC	^[	59	3B	;	91	5B	[	123	7B	{
28	1C	FS	^\	60	3C	<	92	5C	\	124	7C	
29	1D	GS	^]	61	3D	=	93	5D	]	125	7D	}
30	1E	RS	^^	62	3E	>	94	5E	^	126	7E	~
31	1F	US	^_	63	3F	?	95	5F	_	127	7F	D

---

## **Appendix F — Interface Standards**

Interface Standards, established by the Electronic Industries Association (EIA), specify such things as the signaling voltage levels, maximum cable lengths, and number of drivers. In the EZ Match Imager, selection of interface is made by pin assignment and, in the case of host communications, by software switching between RS-232 and RS-422 / RS-485.

### **RS-232**

RS-232 defines an interface between two devices such as, for example, the reader and host. It differs from the other interfaces by dedicating individual pins to specific functions and by requiring both devices to share a common ground line. Since both device chassis are connected to a common ground, a ground loop potential and the possibility of noise interference exists. Therefore cable lengths are limited to a maximum of 50 feet (19.7m). Despite being the most limited, this interface is used frequently because of the large installed base of RS-232 equipment.

### **RS-422 / 485**

RS-422, unlike RS-232, measures signals differentially; that is, the receiver looks at the potentials between the two receive (or transmit) wires rather than the potential between signal and ground. As a result, cables, if shielded, can be up to 4000 feet (1219m) in length. Like RS-232, RS-422 communication is designed for only two devices on a single line and must have a common ground. It can be used wherever RS-232 is used.

### **USB**


The Universal Serial Bus can connect up to 127 devices to a host at a maximum of 6 megabytes per second (Mbps) of bandwidth.

## Appendix G — Using an External Trigger

Two types of inputs are used on Microscan readers. 5 volt devices have NPN trigger inputs. 10-28 volt devices have optoisolated inputs and outputs.


### 5 Volt Devices

To trigger a 5 volt device, the input has to be pulled down to “signal ground” (NPN). This can be done by relays or by a transistor-sourced signal. If a 5 volt device is used in combination with an IC-332, it must be connected as a 10-28 volt device.

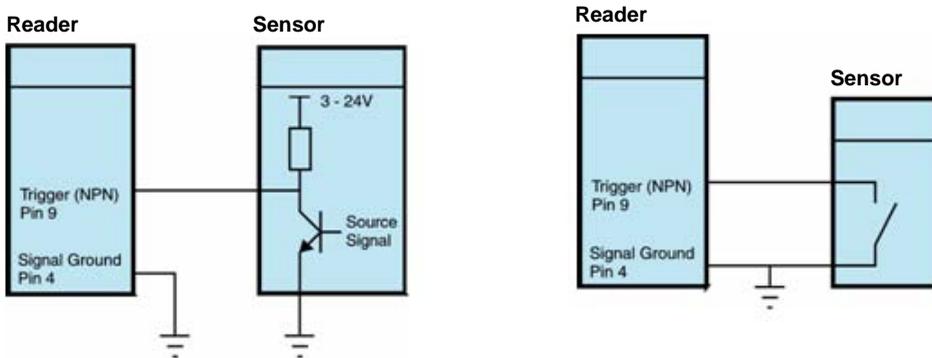

### 10-28 Volt Devices

To trigger a 10-28 volt device, a small amount of current needs to flow from “Trigger +” to “Trigger -”. If a PNP source is used, “Trigger -” must be connected to “signal ground”. If an NPN source is used, “Trigger +” must be connected to the supply voltage.

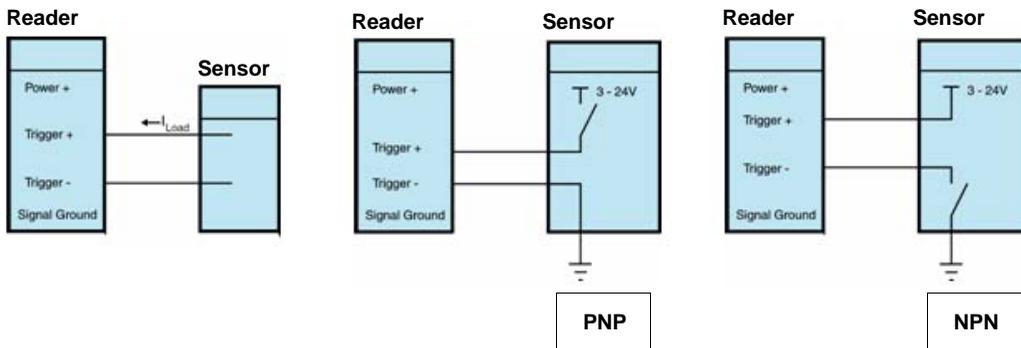

## ***Appendix H — Operational Tips***

### **Cleaning**

The EZ Match Imager has a hard coated window that should only be cleaned with alcohol (100% isopropyl).

### **Mounting**

When mounting the EZ Match Imager, do not insulate the stand mount. The bottom panel is the hottest part of the imager and metal-to-metal contact is necessary for heat dissipation.


# Appendix I — USB-to-Serial Virtual COM Port Driver

(For use with Windows® Vista (32-bit), XP (32-bit), and 2000 Operating Systems)

Microscan's USB-to-Serial Virtual COM Port Driver allows you to send serial data using a USB EZ Match Imager. The driver is available at [www.microscan.com](http://www.microscan.com) or on the Microscan Tools CD.

## Installing the USB-to-Serial Virtual COM Port Driver

1. Download the driver files from the Microscan website or Microscan Tools CD.  
If the driver files are in a .zip file, extract them to a folder of your choice before running the installer.
2. Double-click on **DPInst.exe** to launch the Microscan USB-to-Serial Virtual COM Port Driver Installer.

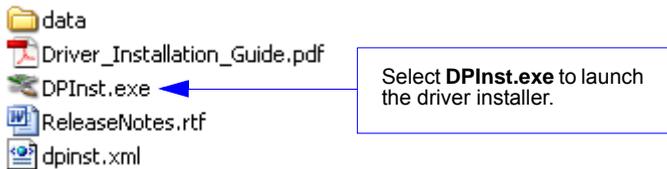

3. Click **Next** on the driver installer's welcome screen.



4. Read the **License Agreement** shown below. If you accept the terms of the agreement, click the radio button next to the statement “I accept this agreement”, and click **Next**.



**Important:** After accepting the license agreement and clicking **Next**, you may see a Windows Security warning that states “Windows can’t verify the publisher of this driver software”. If you receive this warning, choose the “Install this driver software anyway” option.

5. The driver files will begin installing. This may take several seconds. Do not interfere with the installer during this process.




6. Once the driver is installed successfully, you will receive the message shown below. Click **Finish**.



## Uninstalling the USB-to-Serial Virtual COM Port Driver

**Important:** You must uninstall the USB-to-Serial Virtual COM Port Driver any time you require high-speed USB connectivity.

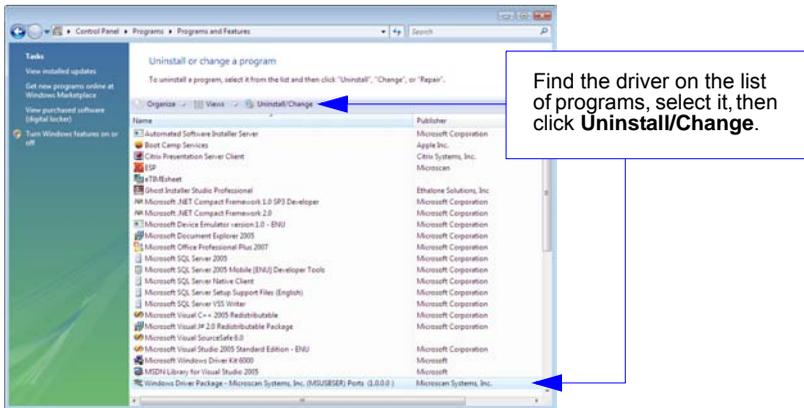


To use the Virtual COM Port again, follow the steps above to re-install the driver.

## Changing the COM Port

Follow these steps to change the reader's COM Port:

1. Right-click on **My Computer** in the Windows **Start** menu and select **Properties**.
  2. Select the **Hardware** tab in the **System Properties** dialog and click the **Device Manager** button.
- 
3. Expand the **Ports (COM & LPT)** item on the **Device Manager** menu. Right-click on **Microscan Reader** and select **Properties**.
  4. Select the **Port Settings** tab in the **Properties** dialog and click the **Advanced** button.
  5. Expand the **COM Port Number** menu on the **Advanced Settings** dialog and select your new COM Port number.

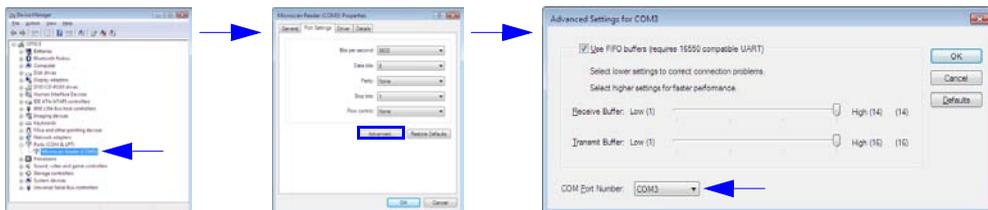

You are now ready to begin using the new COM Port.

## Appendix J — Glossary of Terms

**Aberration** — The failure of an optical lens to produce an exact point-to-point correspondence between the object and its resulting image. Various types are chromatic, spherical, coma, astigmatism and distortion.

**Absorption** — The loss of light of certain wavelengths as it passes through a material and is converted to heat or other forms of energy. (–)

**Active Illumination** — Lighting an area with a light source coordinated with the acquisition of an image. Strobed flash tubes and pulsed lasers are examples.

**ADC** — See **Analog-to-Digital Converter**.

**A/D Converter** — See **Analog-to-Digital Converter**.

**AGC** — See **Automatic Gain Control**.

**Ambient Light** — Light which is present in the environment of the imaging front end of a vision system and generated from outside sources. This light, unless used for actual illumination, will be treated as background **Noise** by the vision system.

**Analog** — A smooth, continuous voltage or current signal or function whose magnitude (value) is the information.

**Analog-to-Digital Converter (A/D Converter or ADC)** — A device that converts an analog voltage or current signal to a discrete series of digitally encoded numbers (signal) for computer processing.

**Application-Specific Integrated Circuit (ASIC)** — An integrated circuit that is customized for a particular kind of use, rather than general use. All vision system elements including firmware can be integrated into one ASIC.

**Architecture** — The hardware organization of a vision system designed for high speed image analysis.

**ASIC** — See **Application-Specific Integrated Circuit**.

**Aspect Ratio** — The ratio between the height and width of a sensor or display. Found by dividing the vertical number of pixels (height) by the horizontal number of pixels (width) leaving it in fractional format.

**Automatic Gain Control (AGC)** — Adjustment to signal strength that seeks to maintain a constant level regardless of the distance between a reader and symbol.

**Auxiliary Port** — RS-232 connection to an auxiliary terminal or device for remote viewing.

**Blooming** — A situation in which too many photons are being produced to be received by a pixel. The pixel overflows and causes the photons to go to adjacent pixels. Blooming is similar to overexposure in film photography, except that in digital imaging, the result is a number of vertical and/or horizontal streaks appearing from the light source in the picture.

**Baud Rate** — The number of discrete signal events per second; bits per second.

**Capture** — The act of acquiring and storing video images in an imager or host computer. Also, the image captured.

**CCD** — See **Charge-Coupled Device**.

**Charge-Coupled Device (CCD)** — A semiconductor device with an array of light-sensitive elements that converts light images into electrical signals.

**Check Character** — A Modulus 43 or Modulus 10 character that is added to encoded symbol data for additional data integrity.

**CMOS** — See **Complementary Metal Oxide Semiconductor**.

**Complementary Metal Oxide Semiconductor (CMOS)** — Like CCDs, CMOS imagers include an array of photo-sensitive diodes, one diode within each pixel. Unlike CCDs, however, each pixel in a CMOS imager has its own individual amplifier integrated inside.

**Connector** — A plug or socket on a device or cable providing in/out connectivity for various circuits and pins.

**Concentrator** — Intermediary device that relays data from imagers to a host and commands from the host to the imagers or other devices.

**Counter** — Memory space allocated to keep track of imager events.

**DAC** — See **Digital-to-Analog Converter**.

**Daisy Chain** — Linkage of primary and secondary imagers allowing data to be relayed up to the host via auxiliary port connections.

**Decode** — A **Good Read**. The successful interpretation and output of the information encoded in a symbol.

**Default** — Restores **ROM** or flash settings, initializes serial commands and resets all counters.

**Delimited** — A delimited command or field is bracketed by predefined characters.

**Decode Rate** — The number of good reads per second achieved by an imager.

**Darkfield Illumination** — Lighting of objects, surfaces, or particles at very shallow or low angles, so that light does not directly enter a reader's optical hardware.

**Depth-of-Field** — The in-focus range of an imaging system. Measured from the distance behind an object to the distance in front of the object with all objects appearing in focus.

**Diffused Lighting** — Scattered soft lighting from a wide variety of angles used to eliminate shadows and specular glints from profiled, highly reflective surfaces.

**Digital-to-Analog Converter (DAC)** — A **VLSI** circuit used to convert digitally processed images to analog for display on a monitor.

**Digital Imaging** — Conversion of an image into pixels by means of an **Analog-to-Digital Converter** where the level of each pixel can be stored digitally.

**Digital Signal Processor (DSP)** — A **VLSI** chip designed for ultra-high-speed arithmetic processing. Often imbedded in a vision engine.

**Discrete I/O** — Inputs and outputs characterized by discrete signal transitions from one voltage level to another so that digital switching can occur.

**Direct Memory Access (DMA)** — A capability provided by some computer bus architectures that allows data to be sent directly to memory from an attached device.

**DMA** — See **Direct Memory Access**.

**DSP** — See **Digital Signal Processor**.

**Dynamic Range** — The difference between the minimum and maximum thresholds of discernible images; the amount of usable signal.

**Edge Enhancement** — Image processing method to strengthen high-spatial frequencies in the image.

**EPROM** — See **Erasable Programmable Read-Only Memory**.

- Embedded Memory** — Onboard memory device such as **EPROM** or flash.
- End of Read Cycle** — The time or condition at which the imager stops expecting symbol information to decode.
- Erasable Programmable Read-Only Memory (EPROM)** — A memory chip that retains data when its power supply is turned off; “non-volatile memory”.
- External Edge** — Allows a read cycle to be initiated by a trigger signal from an object detector when it detects the appearance of an object (rising edge). The read cycle ends with a good read, a timeout, or a new trigger.
- External Level** — Allows a read cycle to be initiated by a trigger signal from an object detector. The read cycle ends when the object moves out of the detector’s range.
- Falling Edge** — A change of state (to inactive) associated with a level trigger.
- Field-Programmable Gate Array (FPGA)** — A semiconductor device containing programmable interconnects and logic components.
- Fill Factor** — Percentage of pixel area used for light collection.
- Firmware** — Software hard-coded in non-volatile memory (**ROM**), and closely tied to specific pieces of hardware.
- Fixed Symbol Length** — Increases data integrity by ensuring that only one symbol length will be accepted.
- Focal Distance** — In camera-based vision, the distance from the front of the camera to the object being viewed. (In optics, the distance from the lens to the focal plane.)
- Focal Plane** — Usually found at the image sensor, it is a plane perpendicular to the lens axis at the point of focus (–).
- Focus** — Any given point in an image at which light converges; the focal point.
- FPGA** — See **Field-Programmable Gate Array**.
- Frame** — The total area captured in an image sensor while the video signal is not blanked.
- Frame Grabber** — A device that interfaces with a camera and, on command, samples the video, converts the sample to a digital value and stores that in a computer's memory.
- Front End System** — The object, illumination, optics and imager blocks of a vision system. Includes all components useful to acquire a good image for subsequent processing.
- Full Duplex** — A communications system in which signals can travel simultaneously between devices.
- Gain** — The amount of energy applied to pixel gray scale values prior to output, expressed in dB; optimal signal strength.
- Good Read** — A decode. The successful scanning and decoding of the information encoded in a bar code symbol.
- Gradient** — The rate of change of pixel intensity (first derivative).
- Gray Scale** — Variations of values from white, through shades of gray, to black in a digitized image with black assigned the value of zero and white the value of one.
- Half Duplex** — A communications system in which signals can travel between devices in both directions, but not simultaneously.

---

## Glossary of Terms

**Histogram** — A graphical representation of the frequency of occurrence of each intensity or range of intensities (gray levels) of pixels in an image. The height represents the number of observations occurring in each interval.

**Host** — A computer, **PLC**, or other device that is used to execute commands and process data and discrete signals.

**Image** — Projection of an object or scene onto a plane (i.e. screen or image sensor).

**Image Processing (IP)** — Transformation of an input image into an output image with desired properties.

**Image Resolution** — The number of rows and columns of pixels in an image. A higher resolution means that more pixels are available per element of the symbol being read. Examples: 640 x 480 (VGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1600 x 1200 (UXGA), or 2048 x 1536 (QXGA).

**Image Sensor** — A device that converts a visual image to an electrical signal; a **CCD** or **CMOS** array.

**Initialize** — Implement serial configuration commands into the imager's active memory.

**Input** — A channel or communications line. Decoded data or a discrete signal that is received by a device.

**Integration** — Exposure of pixels on a **CMOS** sensor.

**IP** — See **Image Processing**.

**Ladder Orientation** — A linear symbol orientation in which the bars are parallel to the symbol's direction of travel.

**LED** — See **Light-Emitting Diode**.

**Light-Emitting Diode (LED)** — A semiconductor device that emits light when conducting current.

**Lens** — A transparent piece of material with curved surfaces which either converge or diverge light rays.

**Machine Vision** — The automatic acquisition and analysis of images to obtain desired data for controlling a specific activity.

**Multidrop** — A communications protocol for networking two or more imagers or other devices with a concentrator (or controller) and characterized by the use of individual device addresses and the RS-485 standard.

**Noise** — The same as static in a phone line or "snow" in a television picture, noise is any unwanted electrical signal that interferes with the image being read and transferred by the imager.

**Normally Closed** — A discrete output state that is only active when open.

**Normally Open** — A discrete output state that is only active when closed.


**Object Plane** — An imaginary plane in the field of view, focused by an imager's optical system at the corresponding image plane on the sensor.

**Output** — A channel or communications line. Data or discrete signals that are transmitted or displayed by a device.

**Parity** — An error detection routine in which one data bit in each character is set to **1** or **0** so that the total number of **1** bits in the data field is even or odd.

**Picket Fence Orientation** — A linear symbol orientation in which the bars are perpendicular to the symbol's direction of travel.

**Pitch** — Rotation of a linear or 2D symbol around an axis parallel to the symbol length on the **Substrate**. See the illustration below.

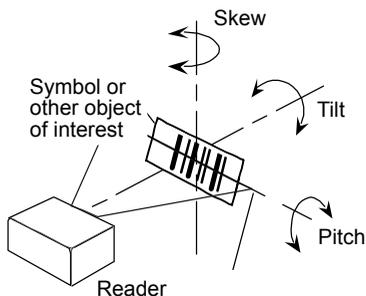

**Pixel** — An individual element in a digitized image array; “picture element”.

**PLC** — See **Programmable Logic Controller**.

**Port** — Logical circuit for data entry and exit. (One or more ports may be included within a single connector.)

**Processing Time** — The time used by a vision system to receive, analyze and interpret image information. Often expressed in “parts per minute”.

**Programmable Logic Controller (PLC)** — An electronic device used in industrial automation environments such as factory assembly lines and automotive manufacturing facilities.

**Progressive Scan** — A non-interlaced scan that doubles the number of visible picture lines per field by displaying all picture lines at once.

**Protocol** — The rules for communication between devices, providing a means to control the orderly flow of information between linked devices.

**RAM** — See **Random Access Memory**.

**Random Access Memory (RAM)** — A data storage system used in computers, composed of integrated circuits that allow access to stored data in any sequence without movement of physical parts.

**Read Cycle** — A programmed period of time or condition during which a reader will accept symbol input.

**Read-Only Memory (ROM)** — A data storage medium used in computers and other electronics, primarily used to distribute **Firmware**.

**Real-Time Processing** — In machine vision, the ability of a system to perform a complete analysis and take action on one part before the next one arrives for inspection.

**Region** — Area of an image. Also called a region of interest for image processing operations.

**ROM** — See **Read-Only Memory**.

---

## *Glossary of Terms*

**Saturation** — The degree to which a color is free of white. One of the three properties of color perception, along with hue and value.

**Scattering** — Redirection of light reflecting off a surface or through an object.

**Skew** — Rotation of a linear or 2D symbol around an axis parallel to the symbol height on the substrate. See the illustration under the definition of **Pitch**.

**Substrate** — The surface upon which a linear or 2D symbol is printed, stamped, or etched.

**Symbol Transitions** — The transition of bars and spaces on a symbol, used to detect the presence of a symbol on an object.

**Symbology** — A symbol type, such as Code 39 or Code 128, with special rules to define the widths and positions of bars and spaces to represent specific numeric or alphanumeric information.

**Tilt** — Rotation of a linear or 2D symbol around an axis perpendicular to the substrate. See the illustration under the definition of **Pitch**.

**Trigger** — A signal, transition, or character string that initiates a read cycle.

**Very Large-Scale Integration (VLSI)** — The creation of integrated circuits by combining thousands of transistor-based circuits on a single chip.

**VLSI** — See **Very Large-Scale Integration**.

**Watchdog Timer** — A security device that detects system crashes and attempts to reset the imager.

# ***Hyperlink Index***

## **A**

A/D Converter  
Aberration  
About the EZ Match  
About This Manual  
Absorption  
ACK / NAK (Main Port)  
ACK / NAK Data Flow Examples  
ACK / NAK Options  
ACK/NAK  
Active Illumination  
Active Tube/Cap Library Indexes  
Active Tube/Cap Library Indexes by Serial Command  
Adaptive Contrast Percent  
ADC  
Add / Remove Exception  
Add Macro  
Additional Notes about Calibration  
Advanced Options  
Advanced Tab  
After Calibration  
AGC  
All Descriptor Status Request  
All Range Status Request  
All Status Request  
Always Ask Before Auto Sync Occurs  
Always OFF  
Always ON  
Ambient Light  
Analog  
Analog-to-Digital Converter  
Any Symbology Type  
Appendices  
Application Mode  
Application Record Brackets (Code 128 / EAN 128)  
Application Record Padding (Code 128 / EAN 128)  
Application Record Separator Character (Code 128 / EAN 128)  
Application Record Separator Status (Code 128 / EAN 128)  
Application-Specific Integrated Circuit  
Architecture  
As Soon As Possible

---

## **B**

As Soon as Possible (Cap Unknown Qualify)  
ASCII Character Entry Modifier  
ASCII Table  
ASIC  
Ask to Save ESP File when Quitting  
Aspect Ratio  
Auto Sync  
Automatic Gain Control  
Auxiliary Port  
Auxiliary Port Connections  
Auxiliary Port Mode  
Auxiliary Port System Data Status  
Axial Non-Uniformity (Data Matrix Only)  
Axial Non-Uniformity Threshold

## **B**

Background Color (IP Database Status)  
Bad Symbol (Trend Analysis Mode)  
Bad Symbol Message  
Bad/No Symbol Output (Dimension Mode)  
Bad/No Symbol Output (Orientation Mode)  
Bad/No Symbol Output (Symbol Size Mode)  
Bar Code Configuration (EZ Button Modes)  
Bar Code Configuration Mode  
Bar Code Dialog  
Bar Code Options  
Bar Code Options Tab  
Bar Code Reader Operation  
Bar Width Status (Pharmacode)  
Baud Rate  
Baud Rate, Auxiliary Port  
Baud Rate, Host Port  
BC412  
BC412 (Symbology Type)  
Beeper  
Beeper / Green Flash  
Before / During Calibration  
Begin Transmission  
Blooming  
Both Horizontal and Vertical (FLM)  
Both Supplemental Types

## **C**

Calibrate  
Calibrate by ESP  
Calibrate by EZ Button

- Calibrate by Serial Command
- Calibration
- Calibration (EZ Button Modes)
- Calibration by ESP
- Calibration Options
- Calibration Overview
- Calibration Progress Indicators
- Calibration Progress Output Examples (Terminal)
- Calibration Progress Output to Terminal
- Calibration Serial Commands
- Camera and IP Setup
- Camera and IP Setup by ESP
- Camera and IP Setup Serial Commands
- Cap Absence Message
- Cap Absent Counter
- Cap Base Diameter
- Cap Base Length
- Cap Counter Reset
- Cap Detection
- Cap Detection Operation
- Cap Presence Message
- Cap Present Counter
- Cap Tip Diameter
- Cap Unknown Counter
- Cap Unknown Message
- Cap Unknown Presence Before Output
- Cap Unknown Qualify
- Capture
- Capture and Decode
- Capture and Test
- Capture Mode
- Capture Time
- Capture Timing
- CCD
- Change Background Color
- Change Echo Font
- Change Font
- Change Keyboard Macros
- Changing Configuration Settings
- Charge-Coupled Device
- Check Character
- Check Character Output (BC412)
- Check Character Output (Codabar)
- Check Character Output Status (Code 39)
- Check Character Output Status (Interleaved 2 of 5)

---

## C

- Check Character Status (Code 39)
- Check Character Status (Interleaved 2 of 5)
- Check Character Type (Codabar)
- Check Required Hardware
- Cleaning the Imager
- Clear
- CMOS
- Codabar
- Codabar (Symbology Type)
- Code 128 (Symbology Type)
- Code 128 / EAN 128
- Code 39
- Code 39 (Symbology Type)
- Code 93
- Code 93 (Symbology Type)
- Codeword Collection (PDF417)
- Color Processing Disabled
- Column
- Column Pointer (IP Database Status)
- Column Width (IP Database Status)
- Command Processing Mode
- Command Response from Imager to Host
- Commands from Host to Imager
- Communication Port
- Communication Protocol Command Table
- Communication Protocols
- Communications
- Communications by ESP
- Communications Protocol
- Communications Serial Commands
- Complementary Metal Oxide Semiconductor
- Composite
- Composite Enabled
- Composite Required
- Concatenating Configuration Commands
- Concentrator
- Configurable Output 1
- Configurable Output 2
- Configurable Output 3
- Configuration Exceptions for USB
- Configuration Setting Changes
- Configuration Symbols (Data Matrix with Configure Reader Flag)
- Configure the Imager in ESP
- Connect the System
- Connecting by RS-232 / RS-422 / RS-485

**D**

Connector  
Constant (Illumination Brightness)  
Continuous Capture  
Continuous Read  
Continuous Read 1 Output  
Control Characters  
Control/Hex Output  
Copy  
Counter  
Counters  
Counters by ESP  
Counters by Serial Command  
Customer Default Parameters  
Cycle Max  
Cycle Min  
Cycle Step

**D**

DAC  
Daisy Chain  
Daisy Chain Autoconfigure  
Daisy Chain ID  
Daisy Chain ID Status  
Daisy Chain Mode  
Damaged Symbol Status  
Darkfield Illumination  
Data (Output Filter Configuration)  
Data Bits, Auxiliary Port  
Data Bits, Host Port  
Data Matrix  
Data Matrix (Symbology Type)  
Data Matrix Output Mode  
Data Originating from the Auxiliary Port (Full Duplex Mode)  
Data Originating from the Auxiliary Port (Half Duplex Mode)  
Data Originating from the Host (Full Duplex Mode)  
Data Originating from the Host (Half Duplex Mode)  
Data Originating from the Host (Transparent Mode)  
Data Originating from the Imager (Full Duplex Mode)  
Data Originating from the Imager (Half Duplex Mode)  
Data Originating from the Imager (Transparent Mode)  
DataBar Expanded  
DataBar Extended (Symbology Type)  
DataBar Limited  
DataBar Limited (Symbology Type)

---

## **D**

DataBar-14  
DataBar-14 (Symbology Type)  
Database Identifier Output  
Database Identifier Output Separator  
Database Identifier Output Status  
Database Index  
Database Mode  
Database Range (Multi-Operation)  
Database Range Maximum  
Database Range Minimum  
Decode  
Decode Rate  
Decode Time  
Decodes per Trigger Status (Quality Output)  
Decodes/Trigger Threshold  
Decodes/Trigger Threshold (Trend Analysis Mode)  
Default  
Default / Reset / Save  
Default Macros  
Default on Power-On  
Default Output Configuration  
Default Settings  
Defaulting  
Defaults  
Definable (Processing)  
Delete Master Symbol Data  
Delimited  
Depth-of-Field  
Detailed No Read Message  
Detection Mode  
Device Control  
Device Control by ESP  
Device Control by Serial Command  
Diagnostics Output 1  
Diagnostics Output 2  
Diagnostics Output 3  
Differences from Default  
Diffused Lighting  
Digital Imaging  
Digital Signal Processor  
Digital-to-Analog Converter  
Dimension 1  
Dimension 2  
Dimension Mode  
Dimension Tolerance

Direct Memory Access  
Direction (Pharmacode)  
Disable Reader  
Disclaimer  
Discrete I/O  
Display Incoming Data Even When Not in Focus  
DMA  
Do Not Send or Receive Settings  
Document Memo  
DSP  
Dynamic Range  
Dynamic Setup

**E**

EAN 128 Status (Code 128 / EAN 128)  
EAN Status  
ECC 000  
ECC 050  
ECC 080  
ECC 100  
ECC 120  
ECC 130  
ECC 140  
ECC 200  
Edge Enhancement  
Editing a Macro  
Effects of Protocol Commands  
Electrical Specifications  
Embedded Memory  
Enable Both (Dimension Mode)  
Enable Both (Orientation Mode)  
Enable Both (Symbol Size Mode)  
Enable Echo  
Enable PDF Information  
Enable Reader  
Enable Send and Save as Customer Defaults  
End of Operation (Cap Unknown Qualify)  
End of Read Cycle  
End of Read Cycle Mode  
End Read Rate Test  
Enhanced Format  
Enter Decodes / Second Test  
Enter Master Symbol Data  
Enter Percent Test

---

## **F**

- Entering and Using Master Symbols
- Entering Control Characters in Serial Commands
- Environmental
- EPROM
- Erasable Programmable Read-Only Memory
- Error Correction Level (Data Matrix Only)
- ESP System Requirements
- Evaluation
- Explanation of Modifiers for Code 128 and QR Code
- Explanation of Modifiers for Code 39, Codabar, and Interleaved 2/5
- External Edge
- External Level
- External Trigger Polarity
- Extract Range
- EZ Button
- EZ Button Configuration
- EZ Button Disabled
- EZ Button Enabled
- EZ Button Mode Disabled
- EZ Button Modes
- EZ Button Operation
- EZ Button Trigger
- EZ Match Dimensions
- EZ Mode

## **F**

- Falling Edge
- Fast Linear Mode (FLM) Direction
- Fast Shutter
- Field-Programmable Gate Array
- File
- File Format
- Fill Factor
- Filter Number
- Find
- Find Next
- Finder Pattern Status
- Fine-Tune Pass
- Firmware
- Firmware by ESP
- Firmware Update
- Firmware Verification
- First Mode
- Five Characters Only

Fixed Symbol Length  
Fixed Symbol Length (BC412)  
Fixed Symbol Length (Code 128 / EAN 128)  
Fixed Symbol Length (Code 39)  
Fixed Symbol Length (DataBar Expanded)  
Fixed Symbol Length (MicroPDF417)  
Fixed Symbol Length (PDF417)  
Fixed Symbol Length (Pharmacode)  
Fixed Symbol Length Status (BC412)  
Fixed Symbol Length Status (Codabar)  
Fixed Symbol Length Status (Code 128 / EAN 128)  
Fixed Symbol Length Status (Code 39)  
Fixed Symbol Length Status (Code 93)  
Fixed Symbol Length Status (DataBar Expanded)  
Fixed Symbol Length Status (MicroPDF417)  
Fixed Symbol Length Status (PDF417)  
Fixed Symbol Length Status (Pharmacode)  
Fixed Threshold Value (IP Database Status)  
Fixed Threshold Value (Pharmacode)  
Focal Distance  
Focal Distance (Read-Only)  
Focal Distance Table (Read Only)  
Focal Plane  
Focus  
Force Connect  
Format Assign  
Format Assign by ESP  
Format Extract  
Format Extract by ESP  
Format Insert  
Format Insert by ESP  
Format UPC-E as UPC-A (UPC / EAN)  
Four Beeps (Position #4)  
FPGA  
Frame  
Frame Count (Multi-Operation)  
Frame Count/Time  
Frame Grabber  
Frame Information  
Front End System  
Full ASCII Set (Code 39)  
Full Duplex  
Full Duplex Mode  
Function Keys

---

## **G**

## **G**

- Gain
- Gain (IP Database Status)
- Gain (Standard Density)
- General Purpose Color Processing
- General Specifications
- General Tab
- Global Status (EZ Button)
- Glossary of Terms
- Good Read
- Good Read (Image Output)
- Good Read / Match Counter (or Good Read Counter)
- Good Read / Match Counter Reset
- Grade (Data Matrix Output Mode)
- Gradient
- Gray Scale
- Green Flash Duration
- Green Flash Mode
- Guard Bar Status (Interleaved 2 of 5)

## **H**

- Half Duplex
- Half Duplex Mode
- Hardware Configuration
- Hardware Default
- Hardware Required
- Height (Row Depth)
- Hex String (Format Insert)
- Hex Values
- High (Processing)
- Highlighting
- Histogram
- Hollow Mode
- Horizontal (FLM)
- Horizontal Linear (1D) Symbols
- Host
- Host Communications
- Host Connector / Pin Assignments
- Host Port Connections
- Host Port Protocol
- Hours (Time Since Reset)

## **I**

- I/O Parameters
- I/O Parameters by ESP

I/O Parameters Serial Commands  
Illumination Brightness  
Image  
Image Dimensions  
Image Library Request  
Image Output  
Image Output Example  
Image Process Looping  
Image Process Looping Disabled  
Image Process Looping Enabled  
Image Processing  
Image Processing Timeout  
Image Resolution  
Image Sensor  
Image Storage  
Image Storage Example  
Image Storage Mode  
Image Storage Type  
Image Storage Type Disabled / Clear  
Imager Position Relative to Symbol  
Imager Status Requests  
Implementing the Host Operating System API and Establishing a Connection with the HID Interface  
Import/Export  
Index (IP Database Status)  
Indicators  
Initialize  
Initiating Calibration  
Input  
Install ESP  
Integration  
Interface Standards  
Interleaved 2 of 5  
Interleaved 2 of 5 (Symbology Type)  
IP  
IP Database  
IP Database Serial Commands  
IP Database Status  
IP Mode  
IP Threshold  
ISO Certification  
ISO/IEC 16022 Grade  
ISO/IEC 16022 Symbol Quality Output  
ISO/IEC 16022 Symbol Quality Output 1  
ISO/IEC 16022 Symbol Quality Output 2  
ISO/IEC 16022 Symbol Quality Output 3

---

## **J**

ISO/IEC 16022 Symbol Quality Output by ESP

## **J**

JPEG Quality

## **K**

Keyboard IN Reports  
Keyboard IN Reports Disabled  
Keyboard IN Reports Enabled  
Keyboard Report Format

## **L**

Ladder Orientation  
Large Intercharacter Gap (Codabar)  
Large Intercharacter Gap (Code 39)  
Last Frame  
Last Frame or New Trigger  
Last Mode  
Latch Mode 2 (Unlatch Opposite Condition)  
Latch Mode 3 (Unlatch Re-enter Read Cycle)  
LED  
LED Aperture Window  
LED Configuration  
Left (Column Pointer)  
Left (Tube/Cap Direction)  
Length  
Length (Format Extract)  
Length (Format Insert)  
Length (Output Filter Configuration)  
Lens  
Light Collection Options  
Light Emitting Diode  
Light Source  
Limitation of Liability  
Line Scan  
Line Scan Height  
Line Speed  
Linear / Stacked Symbology Qualification  
Linear Symbols  
Load Current Settings from IP Database  
Load Current Settings from IP Database by ESP  
Load IP Database

Load New Master (EZ Button Modes)  
Locate the Object by ESP  
Locate the Object by EZ Button  
Locate the Object in the Field of View  
Locate Time  
Longitudinal Redundancy Check  
Low (Processing)  
LRC Status

**M**

Machine Vision  
Macro Name  
Macro Value  
Macros  
Master Database  
Master Database Overview  
Master Symbol Database Size  
Match (Static Presentation Mode)  
Match (Symbol Data Output Status)  
Match Length  
Match Replace  
Match Start Position  
Matchcode  
Matchcode by ESP  
Matchcode Serial Commands  
Matchcode Type  
Matrix Size (Data Matrix Only)  
Mechanical  
Medium (Processing)  
Medium Pass  
Menu Toolbar  
MicroPDF417  
MicroPDF417 (Symbology Type)  
Microscan Default Parameters  
Microscan HID IN Reports  
Microscan HID IN Reports Disabled  
Microscan HID IN Reports Enabled  
Microscan HID Report Format  
Microscan Symbol Quality Output  
Microscan Symbol Quality Output by ESP  
Minimum Good Reads  
Minimum Number of Bars  
Minimum Number of Bars (Pharmacode)  
Minimum Number of Qualified Scan Lines

---

## **N**

Minutes (Time Since Reset)  
Mirrored Image  
Mismatch (Image Output)  
Mismatch (Static Presentation Mode)  
Mismatch (Symbol Data Output Status)  
Mismatch (Trend Analysis Mode)  
Mismatch Counter  
Mismatch Counter Reset  
Mismatch Replace  
Model  
Model Memo  
Mounting the Imager  
Multidrop  
Multi-Operation  
Multi-Operation by Serial Command  
Multi-Operation Index  
Multisymbol  
Multisymbol Separator

## **N**

Narrow Margins  
Narrow Margins (IP Database Status)  
Narrow Margins / Symbology ID  
Navigating in ESP  
New ESP File  
New Master Load Status  
New Master Pin  
New Model  
New Trigger  
Next Row  
No Read (Image Output)  
No Read (Trend Analysis Mode)  
No Read Counter  
No Read Counter Reset  
No Read Message  
No Read Message Mode  
No Read or Good Read (Image Output)  
No Symbol (Trend Analysis Mode)  
No Symbol Message  
Noise  
Normally Closed  
Normally Open  
Not Optoisolated, Scanner Grounded  
Number of Active Indexes

---

**O**

- Number of Active Indexes by ESP
- Number of Captures
- Number of Focal Distances
- Number of Image Frames (Switch Mode)
- Number of Symbols
- Number of Symbols in Field of View
- Number of Triggers
- Number to Output On

**O**

- Object Plane
- Object Qualification (Dimension Mode)
- Object Qualification (Orientation Mode)
- Object Qualification (Symbol Size Mode)
- ON When in the Read Cycle
- ON When Not in the Read Cycle
- Open Image after Save
- Open/Save
- Operation
- Operational Tips
- Options
- Ordered Output Filter
- Orientation Mode
- Orientation Value
- Other Operational Serial Commands
- Output
- Output 1 Pulse
- Output 2 Pulse
- Output 3 Pulse
- Output Coordinates
- Output Filter Configuration
- Output Filter Configuration Rule # 1
- Output Filter Configuration Rule # 2
- Output Filter Configuration Rule # 3
- Output Format
- Output Format (Code 128 / EAN 128)
- Output Format Serial Commands
- Output Format Status
- Output Format Status by ESP
- Output Format Status Disabled
- Output Format Status Enabled
- Output Frame Number
- Output In Read Cycle
- Output Index

---

## **P**

Output Indicators

Output Mode (Output 1)

Output On (Output 1)

Output On (Tube/Cap Detection Output 1)

Output on Axial Non-Uniformity

Output on Cap Unknown (Tube/Cap Detection Output 1)

Output on Cap Unknown (Tube/Cap Detection Output 2)

Output on Cap Unknown (Tube/Cap Detection Output 3)

Output On Diagnostic Warning

Output On Match or Good Read

Output On Mismatch

Output On Mismatch or No Read

Output On No Read

Output on Print Growth

Output on Symbol Contrast

Output On Symbol Quality

Output On Trend Analysis

Output on Tube/Cap Absence (Tube/Cap Detection Output 1)

Output on Tube/Cap Absence (Tube/Cap Detection Output 2)

Output on Tube/Cap Absence (Tube/Cap Detection Output 3)

Output On Tube/Cap Detection

Output on Tube/Cap Presence (Tube/Cap Detection Output 1)

Output on Tube/Cap Presence (Tube/Cap Detection Output 2)

Output on Tube/Cap Presence (Tube/Cap Detection Output 3)

Output on Unused Error Correction

Output State (Output 1)

Output Status Disabled

Output Status Enabled

Overview of Matchcode

Overview of Symbol Quality

## **P**

Parameter Switch

Parity

Parity, Auxiliary Port

Parity, Host Port

Parse Table

Paste

Pause

PDF417

PDF417 (Symbology Type)

Percent Cell Damage (Data Matrix Only)

Pharmacode

Pharmacode (Symbology Type)

Picket Fence Orientation  
Pitch  
Pixel  
Pixel Sub-Sampling  
Pixel Sub-Sampling 16-to-1  
Pixel Sub-Sampling 4-to-1  
Pixels Per Element (Data Matrix Only)  
Placeholder  
PLC  
Point-to-Point (Main Port)  
Point-to-Point (Standard)  
Point-to-Point with RTS/CTS  
Point-to-Point with RTS/CTS and XON/XOFF  
Point-to-Point with XON/XOFF  
Poll Address  
Polling Mode  
Polling Mode (Main Port)  
Polling Mode Data Flow Examples  
Polling Mode Options  
Port  
Position the Imager  
Postamble  
Postamble Characters  
Postamble Status  
Power On / Reset Counts  
Power-On  
Power-On Flash Saves  
Power-On Saves  
Power-On Tube/Cap Library Saves  
Preamble  
Preamble Characters  
Preamble Status  
Preferences  
Pre-Processing  
Pre-Processing Disabled  
Pre-Processing Enabled  
Print Growth  
Print Growth Threshold  
Processing  
Processing Mode (IP Database Status)  
Processing Time  
Programmable Logic Controller  
Progressive Scan  
Protocol  
Protocol Command Mnemonics

---

## Q

Protocol Configuration Examples  
Pulse (Output Mode)  
Pulse Width (Output 1)

## Q

QR Code  
QR Code (Symbology Type)  
Quality Output  
Quality Output Separator  
Quick Start  
Quiet Zone (Data Matrix Only)

## R

RAM  
Random Access Memory  
Range Mode Status (Interleaved 2 of 5)  
Rapid Capture  
Rapid Capture Mode  
Read Cycle  
Read Cycle by ESP  
Read Cycle Serial Commands  
Read Cycle Setup  
Read Cycle Timeout  
Read Duration Output  
Read Duration Output Mode  
Read Duration Output Separator  
Read Next Symbol as Master Symbol  
Read Parameters  
Read Ranges  
Read Rate  
Read Rate (EZ Button Modes)  
Read Rate by ESP  
Read Rate by Serial Command  
Read Rate LEDs  
Read Symbol into Selected Index  
Read-Only Memory  
Real-Time Processing  
Receive After Connect  
Receive Settings from the Reader  
Receiving  
Region  
Region of Interest (ROI)  
Region of Interest (ROI) by ESP

---

**S**

Regular and Mirrored Image  
Regular Image  
Reload Last File  
Replacement String  
Report Format Examples  
Report Options  
Request All IP Database Settings  
Request All Master Symbol Data  
Request Checksum by ESP  
Request Checksum by Serial Command  
Request Master Symbol Data  
Request New Master Status  
Request Part Number by ESP  
Request Part Number by Serial Command  
Request Selected Index Settings  
Resets  
RES-NAK Defaults  
Response Timeout  
Right (Tube/Cap Direction)  
ROM  
Rotating (Tube/Cap Rotation)  
Row  
Row and Column  
Row Depth (IP Database Status)  
Row Pointer (IP Database Status)  
RS-232 Interface Standard  
RS-422 / 485 Interface Standard  
RS-422 Status  
Rules for Output Filter Configuration  
Rules for Utility and Configuration Commands

**S**

Saturation  
Save  
Save Configuration in ESP  
Save Current Settings to IP Database  
Save Current Settings to IP Database by ESP  
Save Current Text  
Save for Power-On  
Save for Power-On (EZ Button Modes)  
Saved for Power-on  
Saving Options  
Scattering  
Search Pass

---

## S

Select All  
Select Model  
Send  
Send and Save  
Send and Save as Customer Defaults  
Send Current Command  
Send Current View  
Send Database to the Reader  
Send ESP Settings to the Reader  
Send XON with Autoconnect  
Send, No Save  
Send/Receive Options  
Send/Recv  
Separator (Tube/Cap Information)  
Separator Character (Composite)  
Separator Character (UPC / EAN)  
Separator Status (Composite)  
Separator Status (UPC / EAN)  
Sequence on Mismatch  
Sequence on No Read  
Sequential Matching  
Serial Command Beep Status  
Serial Command Echo Status  
Serial Command Format  
Serial Command Status Request  
Serial Configuration Command Conventions  
Serial Configuration Commands  
Serial Configuration K Commands  
Serial Data  
Serial Data or External Edge  
Serial Trigger  
Serial Trigger Character (Delimited)  
Serial Utility Commands  
Serial Verification  
Service Message  
Service Message Resolution  
Service Message Threshold  
Service Unit  
Show Connect Prompt  
Show Model Prompt  
Show Non-Printable Characters  
Show Target Pattern During Calibrate  
Show Target Pattern During Locate  
Show TCP/IP Connection Option  
Shutter Speed

---

**S**

Shutter Speed (IP Database Status)  
Shutter Speed (Standard Density)  
Shutter Speed Disabled  
Shutter Speed Enabled  
Single Beep (Position #1)  
Single Descriptor Status Request  
Single Range Status Request  
Single Status Request  
Sizing Information  
Skew  
Skew Correction  
Skew Correction Notes  
Skip EZ Mode  
Software Defaults  
Standard LED Configuration  
Start / Stop Match (Codabar)  
Start / Stop Output (Codabar)  
Start Location  
Start Trigger Character (Non-Delimited)  
Start/Stop Status  
Statement of Agency Compliance  
Static (Tube/Cap Rotation)  
Static Presentation Mode  
Status (Format Assign)  
Status Byte  
Stop  
Stop Bits, Auxiliary Port  
Stop Bits, Host Port  
Stop Trigger Character (Non-Delimited)  
Store on No Read  
Straight Line  
Straight Line Framed  
Strobe  
Substrate  
Supplemental Type (UPC / EAN)  
Supplementals Status (UPC / EAN)  
Supplementals Status Disabled  
Supplementals Status Enabled  
Supplementals Status Required  
Switch Mode  
Switch Model  
Symbol Angle (Data Matrix Only)  
Symbol Contrast  
Symbol Contrast Threshold  
Symbol Data Output

---

## T

- Symbol Data Output Status
- Symbol Direction
- Symbol Length #1 (Interleaved 2 of 5)
- Symbol Length #2 (Interleaved 2 of 5)
- Symbol Length (Codabar)
- Symbol Length (Code 93)
- Symbol Number
- Symbol Parse
- Symbol Quality
- Symbol Quality by ESP
- Symbol Quality Separator
- Symbol Quality Separator / Data Matrix Output Mode
- Symbol Quality Separator by ESP
- Symbol Quality Serial Commands
- Symbol Size 1
- Symbol Size 2
- Symbol Size Mode
- Symbol Size Tolerance
- Symbol Transitions
- Symbol Type
- Symbol Type (IP Database)
- Symbologies
- Symbologies by ESP
- Symbologies Serial Commands
- Symbology
- Symbology Identifier
- Symbology Type
- Symbology Type (IP Database Status)
- Symbology Type Disabled

## T

- Table of Contents
- Target Pattern
- Target System (EZ Button Modes)
- Technical Support
- Terminal
- Terminal Dropdown Menu
- Terminal Window
- Terminal Window Menus
- Test
- Test Read Rate
- Test Read Rate by ESP
- Test Read Rate by EZ Button
- Test Read Rate by Serial Command

Three Beeps (Position #3)  
Threshold (Histogram)  
Threshold Mode  
Threshold Mode (IP Database Status)  
Threshold Value  
Tilt  
Time (Switch Mode)  
Time Before First Capture  
Time Between Captures  
Time Since Reset  
Timed Capture  
Timeout  
Timeout (Multi-Operation)  
Timeout or New Trigger  
Top (Row Pointer)  
Total Read Time  
Transparent Mode  
Trend Analysis Mode  
Trend Analysis Output 1  
Trend Analysis Output 2  
Trend Analysis Output 3  
Trigger  
Trigger Character  
Trigger Counter  
Trigger Counter Reset  
Trigger Filter Duration  
Trigger Mode  
Trigger Mode and Duration  
Triggered Capture  
Tube Absence Message  
Tube Absent Counter  
Tube Angle  
Tube Counter Reset  
Tube Detection  
Tube Detection Operation  
Tube Diameter  
Tube Presence Message  
Tube Present Counter  
Tube/Cap Detection Messages  
Tube/Cap Detection Notes  
Tube/Cap Detection Output 1  
Tube/Cap Detection Output 2  
Tube/Cap Detection Output 3  
Tube/Cap Dimensions  
Tube/Cap Dimensions by Serial Command

---

## U

- Tube/Cap Direction
- Tube/Cap Information by Serial Command
- Tube/Cap Inspection
- Tube/Cap Inspection Serial Commands
- Tube/Cap Learn
- Tube/Cap Learn (EZ Button Modes)
- Tube/Cap Library
- Tube/Cap Library Default Configuration
- Tube/Cap Library Index
- Tube/Cap Message Editing
- Tube/Cap Message Editing by Serial Command
- Tube/Cap Message Formatting by Serial Command
- Tube/Cap Mode
- Tube/Cap Presence Before Output
- Tube/Cap Rotation
- Tube/Cap Tip Position
- Two Beeps (Position #2)
- Two Characters Only
- Two-Dimensional Symbology Qualification
- Two-Dimensional Symbols

## U

- Unlatch Outputs
- Unused Error Correction (Data Matrix Only)
- Unused Error Correction Threshold
- UPC / EAN
- UPC/EAN (Symbology Type)
- USB HID Configuration Options
- USB HID Interface
- USB Interface Standard
- Use Default Storage Location
- Use Higher Quality Images
- User-Defined Polling Mode (Main Port)
- Using ESP
- Utilities

## V

- Value (Data Matrix Output Mode)
- Vertical (FLM)
- Very Large-Scale Integration
- Video
- View
- VLSI

---

**W****W**

Warning and Caution Summary  
Warranty  
Watchdog Timer  
When to Output Symbol Data  
Width (Column Width)  
Wild Card Character  
Wildcard  
Window of Interest  
Window of Interest (WOI) by ESP  
Window of Interest (WOI) Framing  
Window of Interest (WOI) Margin  
Window of Interest by ESP  
Window of Interest by Serial Command

**Y**

Y-Modem Upload Transfer Options