

## MS-4Xi



### MS-4Xi: At a Glance

- Decodes/second: up to 10
- X-Mode Decoding Technology
- Integrated Ethernet Connectivity
- 10 to 30 VDC



ESP® Easy Setup Program: Single-point software provides quick and easy setup and configuration of all Microscan readers.



EZ Button: This performs reader setup and configuration with no computer required.



Visible Indicators: Include "good read" green flash, LEDs and symbol positioning tool.

For more information on this product, visit [www.microscan.com](http://www.microscan.com).

### MS-4Xi: Available Codes

Linear	All Standard	Postal Codes	
Stacked	MicroPDF	PDF417	GS1 Databar
	Data Matrix	QR	Micro QR
2D			

## Ultra-Compact Ethernet Imager

The MS-4Xi features ultra-compact size and wide angle optics to provide the widest field of view available for reading any symbol at close range. Aggressive decoding is ensured through X-Mode technology, which reads direct part marks and damaged or difficult symbols with no configuration or setup required.

Easy setup and advanced decoding make the MS-4Xi the ideal imager for reliable reading in almost any automation environment.

#### X-Mode Technology

Our patented X-Mode technology provides easy setup and deployment of the MS-4Xi in any application. In addition to reliable decoding of damaged or difficult linear codes and 2D symbols, the MS-4Xi features advanced decode algorithms to read a wide range of direct part marks.

#### Compact & Lightweight

The MS-4Xi is the world's smallest high performance imager. Its small form allows flexible positioning in tight spaces. The lightweight and durable magnesium alloy case weighs less than 2 oz.

#### Mounting Flexibility

The compact size, right angle mirror option, and corner-exit cable of the MS-4Xi conserve cubic space to create the tightest fit possible within instrumentation and equipment.

#### Embedded Ethernet

Integrated Ethernet is included for industrial connectivity and high speed communication.

#### Wide Field of View


The MS-4Xi has an extremely wide field of view and reads linear codes or 2D symbols as close as 1" (25 mm).

#### Application Examples


- Clinical Instruments
  - Embedded barcode reading
  - Sample tracking and vial reading
- Medical Devices
  - Dot peen or laser marks on products
- Electronics
  - Laser markings on printed circuits boards, flex circuits
  - Sub-assembly tracking
- Semiconductors
  - Laser marks on packages and components

# MICROSCAN®

# MS-4Xi IMAGER SPECIFICATIONS AND OPTIONS

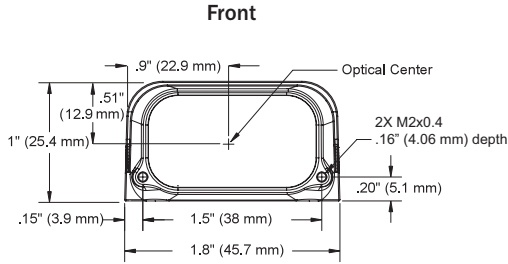


## READ RANGES (GRAPHS AND TABLES)

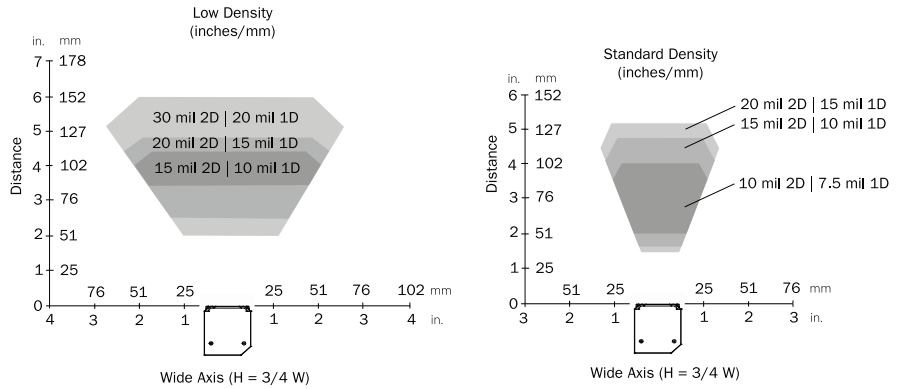

Narrow-bar-width		Field of View (width)*	Read Range
1D	2D	(maximum)	
<b>Standard Density</b>			
.0075" (0.19 mm)	.010" (0.25 mm)	2.4" (61 mm)	2 to 4.0" (51 mm to 102 mm)
.010" (0.25 mm)	.015" (0.38 mm)	2.6" (66 mm)	1.7 to 4.7" (43 mm to 119 mm)
.015" (0.38 mm)	.020" (0.51 mm)	2.8" (71 mm)	1.4 to 5.2" (36 mm to 132 mm)
<b>Low Density</b>			
.010" (0.25 mm)	.015" (0.38 mm)	4.2" (107 mm)	3.5 to 4.5" (89 mm to 114 mm)
.015" (0.38 mm)	.020" (0.51 mm)	4.5" (114 mm)	2.7 to 5.0" (69 mm to 127 mm)
.020" (0.51 mm)	.030" (0.76 mm)	5.5" (140 mm)	2.0 to 6.0" (51 mm to 152 mm)

\*Height is 75% of width.  
Note: Specifications subject to change.

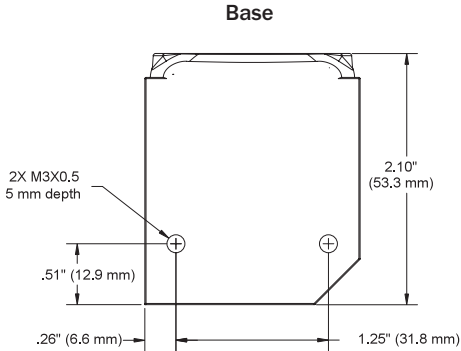

Note: Nominal dimensions shown. Typical tolerances apply.

### MECHANICAL

**Height:** 1" (25.4 mm) **Width:** 1.80" (45.7 mm)  
**Depth:** 2.10" (53.3 mm) **Weight:** 3.2 oz. (91 g)

### ENVIRONMENTAL

**Enclosure:** IP54 (category 2)  
**Operating Temperature:** 0° to 40° C (32° to 104° F)  
**Storage Temperature:** -50° to 75° C (-58° to 167° F)  
**Humidity:** up to 90% (non-condensing)

### CE MARK

**General Immunity for Light Industry:**  
EN 55024: 1998 ITE Immunity Standard  
**Radiated and Conducted Emissions of ITE Equipment:** EN 55022:98 ITE Disturbances

### LIGHT SOURCE

**Type:** High output LEDs



### LIGHT COLLECTION OPTIONS

Progressive scan, square pixel.  
Software adjustable shutter speed,  
electronic shutter  
**VGA:** 640 by 480

### SYMBOLGY TYPES


**2D Symbologies:** Data Matrix (ECC 0-200), QR Code, Micro QR Code  
**Stacked Symbologies:** PDF417, Micro PDF417, GS1 Databar (Composite & Stacked)  
**Linear Barcodes:** Code 39, Code 128, BC 412, I2 of 5, UPC/EAN, Codabar, Code 93, PharmacoDE, PLANET, PostNet, Japanese Post, Australian Post, Royal Mail, Intelligent Mail, KIX

### READ PARAMETERS

**Pitch:** ±30° **Skew:** ±30° **Tilt:** 360°  
**Decode Rate:** Up to 10 decodes per second

### PIN ASSIGNMENTS

#### M12 12-Pin Plug:



9	Host Rx/D
10	Host Tx/D
2	Power
7	Ground
1	Trigger
8	Input Common
3	Default
4	New Master
5	Output 1
11	Output 2
6	Output 3
12	Output Common

#### RJ45 Plug:



1	TX (+)
2	TX (-)
3	RX (+)
4	NC
5	NC
6	RX (-)
7	NC
8	NC

### CONNECTOR

**Dual Cable:** 6 ft. industrial Ethernet cable with RJ45 plug; and 3 ft. cable with M12 plug

### INDICATORS

**LEDs:** Read Performance, Power, Read Status  
**Green Flash:** Good read  
**Blue V:** Symbol locator  
**Beeper:** Good read, match/mismatch, noread, serial command confirmation, on/off

### COMMUNICATION INTERFACE

**Standard Interface:** Ethernet TCP/IP, RS-232

### ELECTRICAL

**Power:** 10-30 VDC, 200 mV p-p max. ripple, 132 mA @ 24 VDC (typ.)

### DISCRETE I/O

**Trigger Input, New Master:** Bi-directional, optoisolated, 4.5-28V rated (10 mA at 28 VDC)  
**Outputs (1, 2, 3):** Bi-directional, optoisolated, 1-28V rated, (I<sub>ce</sub> <100 mA at 24 VDC, current limited by user)

### QMS CERTIFICATION

[www.microscan.com/quality](http://www.microscan.com/quality)

©2015 Microscan Systems, Inc. SP081C-EN-1114

Performance data is determined using high quality Grade A symbols per ISO/IEC 15415 and ISO/IEC 15416 in a 25° C environment. For application-specific results, testing should be performed with symbols used in the actual application. Microscan Applications Engineering is available to assist with evaluations. Results may vary depending on symbol quality. **Warranty**—For current warranty information on this product, please visit [www.microscan.com/warranty](http://www.microscan.com/warranty).

# MICROSCAN®

[www.microscan.com](http://www.microscan.com)